

# Bezout Factors and $H_2$ -Optimal Controllers for Delay Systems using a two-parameter Compensator Scheme

Catherine Bonnet, Jonathan R. Partington

► **To cite this version:**

Catherine Bonnet, Jonathan R. Partington. Bezout Factors and  $H_2$ -Optimal Controllers for Delay Systems using a two-parameter Compensator Scheme. [Research Report] RR-3023, INRIA. 1996. <inria-00073670>

**HAL Id: inria-00073670**

**<https://hal.inria.fr/inria-00073670>**

Submitted on 24 May 2006

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

***Bezout Factors and  $L^1$ -Optimal Controllers for  
Delay Systems using a two-parameter  
Compensator Scheme.***

Catherine Bonnet , Jonathan R. Partington

**N° 3023**

Octobre 1996

————— THÈME 4 —————



***rapport  
de recherche***



# Bezout Factors and $L^1$ -Optimal Controllers for Delay Systems using a two-parameter Compensator Scheme.

Catherine Bonnet <sup>\*</sup>, Jonathan R. Partington <sup>†</sup>

Thème 4 — Simulation et optimisation  
de systèmes complexes  
Projet Sosso

Rapport de recherche n° 3023 — Octobre 1996 — 28 pages

**Abstract:** We consider in this paper the simultaneous problem of optimal robust stabilization and optimal tracking for SISO systems in an  $L^\infty$ -setting using a two-parameter compensator scheme. Optimal robustness is linked to the work done by Georgiou and Smith in the  $L^2$ -setting. Optimal tracking involves the resolution of  $L^1$ -optimization problems. We consider in particular the robust control of delay systems. We determine explicit expressions of the Bezout factors for general delay systems which are in the Callier-Desoer class  $\hat{\mathcal{B}}(0)$ . Finally, we solve several general  $L^1$ -optimization problems and give an algorithm to solve the optimal robust control problem for a large class of delay systems.

**Key-words:** Robust control, stabilization, Bezout factors, delay systems,  $L^1$ -optimal control, two-parameter compensator

*(Résumé : tsvp)*

The authors express their gratitude to M.C. Smith and M. Sorine for many helpful discussions.

<sup>\*</sup> Catherine.Bonnet@inria.fr

<sup>†</sup> University of Leeds, School of Mathematics, Leeds LS2 9JT, U.K.

# Facteurs de Bezout et contrôleurs $L^1$ -optimaux de systèmes à retards dans un contexte de contrôleurs à deux degrés de liberté

**Résumé :** Nous considérons, dans le cadre  $L^\infty$ , le problème simultané de stabilisation robuste optimale et de régulation optimale de systèmes scalaires au moyen de contrôleurs à deux degrés de liberté. La stabilisation robuste optimale dans ce cadre est liée à celle obtenue par Georgiou et Smith dans le cadre  $L^2$ . La régulation optimale repose sur la résolution de problèmes d'optimisation dans  $L^1$ . Nous considérons en particulier le contrôle robuste de systèmes à retards. Nous déterminons des expressions explicites des facteurs de Bezout pour des systèmes à retards généraux qui appartiennent à la classe de Callier-Desoer  $\hat{\mathcal{B}}(0)$ . Enfin, nous résolvons quelques problèmes généraux d'optimisation dans  $L^1$  et donnons un algorithme pour la résolution du problème de contrôle optimal pour une large classe de systèmes à retards.

**Mots-clé :** Contrôle robuste, stabilisation, facteurs de Bezout, systèmes à retards, contrôle  $L^1$ -optimal, contrôleur à deux degrés de liberté.

## Preliminaries

*RHP*:  $\{ x + iy, x > 0, y \in \mathbb{R} \}$ .

$L^p$  denotes the complex-valued measurable functions on the nonnegative real axis such that  $\left( \int_0^\infty |f(t)|^p dt \right)^{1/p} < \infty$ .

$L^\infty$  denotes the complex-valued measurable functions on the nonnegative real axis such that  $\text{ess sup}_{t \in \mathbb{R}_+} |f(t)| < \infty$ .

$C_c$  denotes the subspace consisting of continuous functions of compact support. Let  $f \in L^p$ ,  $\alpha(f) = \sup\{ t \in \mathbb{R}_+, f(x) = 0 \text{ a.e. on } (0, t) \}$ .

A linear continuous-time system  $G$  is defined as a linear integral convolution operator  $G$  from  $L^p$  to  $L^p$ .

The system  $G$  is  $L^p$ -stable if  $\|G\|_{\langle p \rangle} \triangleq \sup_{x \in L^p, x \neq 0} \frac{\|Gx\|_{L^p}}{\|x\|_{L^p}} < \infty$ .

$\mathcal{A}(\beta)$  denotes the space of distributions of the form  $g(t) = g_a(t) + \sum_{i=0}^\infty g_i \delta(t - t_i)$  where  $t_i \in [0, \infty)$ ,  $0 \leq t_0 < t_1 < \dots$ ,  $\delta(t - t_i)$  is a delayed Dirac function,  $g_i \in \mathbb{C}$ ,  $e^{-\beta \cdot} g_a(\cdot) \in L^1[0, \infty)$  and  $\sum_{i=0}^\infty |g_i| e^{-\beta t_i} < \infty$ .

$\mathcal{A}(\beta)$  is equipped with the norm :  $\|g\|_{\mathcal{A}(\beta)} = \int_0^\infty e^{-\beta t} |g_a(t)| + \sum_{i=0}^\infty |g_i| e^{-\beta t_i}$ .

$\mathcal{A}(0)$  is simply denoted  $\mathcal{A}$ .

The Laplace transform  $\mathcal{L}$  of  $g$  is denoted  $\hat{g} : \hat{g}(s) = \int_{-\infty}^\infty e^{-st} g(t) dt$ . Often we shall be considering transforms of functions defined only on  $[0, \infty)$ , in which case we shall regard them as being defined to be zero on  $(-\infty, 0)$ .

$\hat{\mathcal{A}}_-(\beta) = \{ \hat{g} / \hat{g} \in \hat{\mathcal{A}}(\beta_1) \text{ for some } \beta_1 < \beta \}$ .

$$\hat{\mathcal{A}}_\infty(\beta) = \{\hat{g} \in \hat{\mathcal{A}}_-(\beta) \mid \exists \rho \text{ s.t. } \inf_{\{s \in \{\Re(s) \geq \beta\}, |s| \geq \rho\}} |\hat{g}(s)| > 0\}.$$

The Callier-Desoer class  $\hat{\mathcal{B}}(\beta)$  is defined as [1]:

$$\hat{\mathcal{B}}(\beta) = \{\hat{g} = \hat{n}\hat{d}^{-1} \text{ where } \hat{n} \in \hat{\mathcal{A}}_-(\beta) \text{ and } \hat{d} \in \hat{\mathcal{A}}_\infty(\beta)\}.$$

Let  $T^1$  denote the space of all linear time-invariant causal continuous-time  $L^1$ -stable systems equipped with the operator norm.

Distributions in  $\mathcal{A}$  generate a subspace  $T_{\mathcal{A}}^1$  of  $T^1$ .  $T_{\mathcal{A}}^1$  is isometrically isomorphic to  $\mathcal{A}$ . Let  $G \in T_{\mathcal{A}}^1$ , we have  $\|G\|_{\langle 1 \rangle} = \|G\|_{\langle \infty \rangle} = \|g\|_{\mathcal{A}} = \|\hat{g}\|_{\mathcal{A}}$ .

By a convenient abuse of notation we use the same notation  $G$  for the operator  $G$  and the transfer function  $\hat{g}$ .

Let  $F(T_{\mathcal{A}}^1)$  denote the quotient field of  $T_{\mathcal{A}}^1$ .  $F(T_{\mathcal{A}}^1)$  is the set of all systems  $G$  whose transfer function is of the form  $\frac{P(s)}{Q(s)}$ ,  $P, Q \in T_{\mathcal{A}}^1$  and  $Q \neq 0$ . We denote  $F_c(T_{\mathcal{A}}^1)$  the set of all causal systems in  $F(T_{\mathcal{A}}^1)$  and  $CF(T_{\mathcal{A}}^1)$  the set of all systems in  $F_c(T_{\mathcal{A}}^1)$  that have a coprime factorization over  $T_{\mathcal{A}}^1$ . The system  $G \in F_c(T_{\mathcal{A}}^1)$  is said to have a coprime factorization  $(N, D)$  over  $T_{\mathcal{A}}^1$  if  $G = \frac{N}{D}$ ,  $D \neq 0$ ,  $N, D \in T_{\mathcal{A}}^1$  and there exists  $X, Y \in T_{\mathcal{A}}^1$  such that  $-NX + DY = 1$ .

A coprime factorization  $(N, D)$  over  $T_{\mathcal{A}}^1$  is said to be normalized if

$$N(s)\overline{N(s)} + D(s)\overline{D(s)} = 1$$

for any  $s = j\omega$  (as  $N$  and  $D$  are in  $T_{\mathcal{A}}^1$ ,  $N(j\omega)$  and  $D(j\omega)$  are continuous and bounded on  $\mathbb{R}$ ). We can deduce from [2] that each  $G \in CF(T_{\mathcal{A}}^1)$  has a normalized coprime factorization over  $T_{\mathcal{A}}^1$  which is unique to within multiplication by  $\pm 1$ , as the proof of [[2], Theorem 4.2] is still valid in the complex case.

It proceeds as follows ([2] and [3]). Let  $(N, D)$  be any coprime factorization over  $T_{\mathcal{A}}^1$ , define  $F(j\omega) = \frac{1}{|N(j\omega)|^2 + |D(j\omega)|^2}$  and write  $\ln F(j\omega) = V(j\omega) + \overline{V(j\omega)}$

then  $U$  defined by  $U(j\omega) = \exp V(j\omega)$  is such that  $G = \frac{NU}{DU}$  is a normalized coprime factorization.

## 1 Introduction

In this paper we consider the robust control of infinite dimensional SISO systems with a special emphasis on delay systems and particularly on the delay integrator as it is the system which motivated our study. In fact, through an industrial problem of car depollution we were faced with the problem of optimally robustly stabilizing a delay integrator as well as making it optimally track a constant signal output over time of unit amplitude. This is a simply-stated problem, but there is no existing method for it in the literature.

Optimal robust stabilization for the standard feedback problem in the  $L^2$ -setting has been considered by Georgiou and Smith [4] when uncertainty is based on perturbations on the coprime factors of the system (or on perturbations in the gap metric). In the case of delay systems of the form  $G(s) = e^{-sT}R(s)$  where  $R(s)$  is a strictly proper rational function and  $T > 0$ , an explicit formula for the optimal robust controller is given as well as the value of the optimal robustness margin. However, this formula is not obtained using the Youla parametrization of the stabilizing controllers and the resolution of an optimization problem in  $H_\infty$  as set in the generic case but is a closed form expression. Thus it is impossible to modify this expression to be able to act on the tracking quality of this controller.

At this point, the idea is to consider a two-parameter scheme instead of the standard feedback configuration. In this scheme too, the controllers are parametrized in terms of the Bezout factors of the system. Kamen, Khargonekar and Tannenbaum [5] and more recently Brethe and Loiseau [6] and Glüsing-Luerßen [7] considered the existence of coprime factorizations of time-delay systems with commensurate time-delays. They proved that the set of entire functions over  $\mathbb{R}(s)[e^{-s}]$  is a Bezout domain. In [6] we can find an algorithm to compute the coprime factorizations for such delay-systems. The stabilizing controllers (of the standard feedback scheme) obtained through the standard Youla parametrization produce control laws which contain commensurate and distributed delays.

Now, the practical problem leads us to consider an  $L^\infty$ -setting firstly because we consider persistent signals and secondly because we intend to measure the



$L^\infty$ -quality of the tracking. It was Vidyasagar [8] and Dahleh and Pearson [9] [10] [11] [12] who first mentioned the interest of developing an equivalent theory to the well-known  $H_\infty$ -theory arising in the  $L^2$ -setting: in practical situations, very often signals are naturally not of bounded energy but of bounded magnitude. Moreover one might want to control the magnitude of an error signal rather than its integral square. As  $L^\infty$ -optimal control gives rise to optimization problems in the algebra  $L^1 + \sum_{i=0}^{\infty} c_i \delta(t - t_i)$ , they solved several  $L^1$  ( $\ell^1$ )-optimization problems for continuous (discrete-time) finite-dimensional systems. Staffans [13] studied equivalent problems for discrete-time infinite dimensional systems but as far as we know the case of continuous-time infinite dimensional systems has not been studied. The problem of optimal robust stabilization of infinite dimensional systems in an  $L^\infty$ -setting has been studied in [3], [2], [14]. In [14] we established a link between optimal controllers in this setting and those determined by Glover-McFarlane [15] and Georgiou-Smith [4] in the  $L^2$ -setting as well as convergence results of optimal controllers and robustness margins of finite dimensional systems to those of infinite dimensional systems. Those results will be helpful in the study of the present paper. The paper is organized as follows. In section 2 we formulate the double problem of optimal robust stabilization and optimal tracking through a two-parameter compensator scheme for general infinite dimensional systems. In section 3 we propose a family of (eventually normalized) coprime factorizations and Bezout factors for a class of delay systems. In section 4 we solve for different classes of systems the  $L^1$ -optimization problem that was posed in section 2. Finally, we give a general algorithm to solve the proposed robust control problem.

## 2 Robust stabilization and tracking for infinite dimensional systems

We consider in this section, the simultaneous problem of robust stabilization and tracking.

Given a linear continuous-time infinite dimensional system  $G$  defined as:

$$G : L^\infty \longrightarrow L^\infty$$

$$\mapsto g * u$$

we know from [3] that  $G$  is BIBO-stabilizable (by feedback) if and only if  $G$  admits a coprime factorization over  $T_{\mathcal{A}}^\infty$ .

Now, let us suppose  $(N, D)$  is a normalized coprime factorization of  $G$  over  $T_{\mathcal{A}}^\infty$  and  $(X, Y)$  are corresponding Bezout factors:

$$-NX + DY = 1$$

$$\text{and } N(s)N(-s) + D(s)D(-s) = 1 \text{ for any } s = j\omega.$$

It is well-known (see [16], page 141) that, given  $e$  the plant input,  $y$  the plant output and  $u$  the external input, the most general feedback linear compensator scheme is given by:

$$e = C_1u + C_2y$$

where  $C_1$  and  $C_2$  are linear operators on  $L^\infty$ .

Here, we denote the external inputs  $r$  (reference signal) and  $d$  (disturbance).

If we take  $C_1 = C_2$  (denoted  $C$ ), we obtain the standard feedback configuration below:

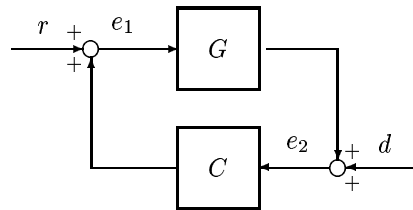


Figure 1: Standard Feedback Configuration

In this case, the set of all stabilizing compensators is parametrized as  $C = (X + DN)(Y + NQ)^{-1}$  where  $Q \in \hat{\mathcal{A}}$ .

The general feedback law can be implemented as shown below:

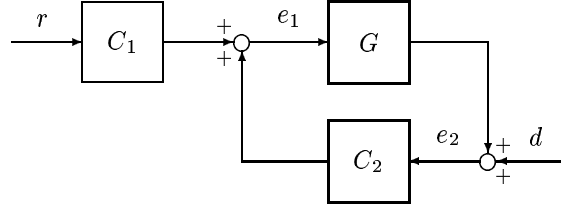


Figure 2: Infeasible Implementation of a two-Parameter Compensator

As explained in [16], this implementation makes no sense unless  $C_1$  is stable. Let  $(V, (U_1, U_2))$  be a coprime factorization of  $(C_1, C_2)$  so that  $C_1 = \frac{U_1}{V}$  and  $C_2 = \frac{U_2}{V}$ . A feasible implementation of the general feedback law is given by:

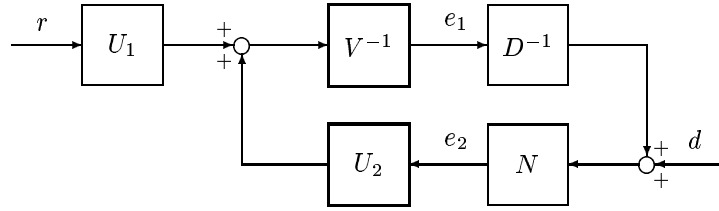


Figure 3: Feasible Implementation of a two-Parameter Compensator

By [16] (where Theorem 15 is still valid in infinite dimensions) we know that the set of all two-parameter compensators that stabilize  $G$  is given by:  $(U(Y + NQ)^{-1}, (X + DN)(Y + NQ)^{-1})$   $U, Q \in \hat{\mathcal{A}}$ .

The input-output relation corresponding to Figure 3 is described as follows:

$$\begin{pmatrix} e_1 \\ e_2 \end{pmatrix} = \begin{pmatrix} (VD - U_2N)^{-1}U_1D & (VD - U_2N)^{-1}U_2D \\ (VD - U_2N)^{-1}U_1N & (VD - U_2N)^{-1}VD \end{pmatrix} \begin{pmatrix} r \\ d \end{pmatrix}$$

and it is easy to see that the stabilization is governed by  $C_2$  only.

We suppose  $[G, (C_1, C_2)]$  is stable and consider  $G_1 = \frac{N + \Delta N}{D + \Delta D}$ . In this case the input-output matrix  $\begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix}$  is given by:

$$\begin{aligned} m_{11} &= ((VD - U_2N) + (V\Delta D + U_2\Delta N))^{-1} U_1(D + \Delta D) \\ m_{12} &= ((VD - U_2N) + (V\Delta D + U_2\Delta N))^{-1} U_2(D + \Delta D) \\ m_{21} &= ((VD - U_2N) + (V\Delta D + U_2\Delta N))^{-1} U_1(N + \Delta N) \\ m_{22} &= ((VD - U_2N) + (V\Delta D + U_2\Delta N))^{-1} V(D + \Delta D) \end{aligned}$$

The stability of  $[G_1, (C_1, C_2)]$  depends on the invertibility of  $((VD - U_2N) + (V\Delta D + U_2\Delta N))$  in  $\hat{\mathcal{A}}$ .

Clearly, Proposition 6.1, Proposition 6.2 and Proposition 6.3 of [14] giving results on the robust stabilization through a standard feedback scheme as well as Proposition 6.4 giving convergence results are still valid here. We recall these propositions in our context of the two-parameter compensator scheme.

**Proposition 2.1** a) If  $(\|\Delta N\|_{\hat{\mathcal{A}}}^2 + \|\Delta D\|_{\hat{\mathcal{A}}}^2)^{1/2} < \frac{1}{\left\| \begin{matrix} X + DQ \\ Y + NQ \end{matrix} \right\|_{\infty}}$

then  $[G_1, (C_1, C_2)]$  is stable.

b) If  $(Y + NQ)\Delta D - (X + DQ)\Delta N = 1$  for some  $s_0$  on  $j\mathbb{R}$  then  $[G_1, (C_1, C_2)]$  is unstable.

**Proposition 2.2** Let  $C = (U(Y + NQ)^{-1}, (X + DN)(Y + NQ)^{-1})$ , with  $U, Q \in \hat{\mathcal{A}}$ . Then the following are equivalent:

a)  $[G_1, (C_1, C_2)]$  is stable for all transfer functions  $G_1 = (N + \Delta N)(D + \Delta D)^{-1}$  where  $\Delta N, \Delta D \in T_{\hat{\mathcal{A}}}^1$  and  $\|(\Delta N, \Delta D)\|_{\hat{\mathcal{A}}} < b$

b)  $\left\| \begin{matrix} X + DQ \\ Y + NQ \end{matrix} \right\|_{\infty} \leq \frac{1}{b}$ .

In the case of systems with kernel in  $L^1 + \mathbb{C}\delta$ , we have:

**Proposition 2.3** *Let  $Q^{opt}$  be defined by*

$$\left\| \begin{pmatrix} X \\ Y \end{pmatrix} + \begin{pmatrix} D \\ N \end{pmatrix} Q^{opt} \right\|_{\infty} = \inf_{Q \in H_{\infty}} \left\| \begin{pmatrix} X \\ Y \end{pmatrix} + \begin{pmatrix} D \\ N \end{pmatrix} Q \right\|_{\infty}.$$

*Then  $X + DQ^{opt} \in \mathcal{L}(L^1(0, \infty) + \mathbb{C}\delta) + \mathbb{C}\delta$  and  $Y + NQ^{opt} \in \mathcal{L}(L^1(0, \infty) + \mathbb{C}\delta)$ .*

*Moreover  $b^{opt}(G) = \frac{1}{\left\| \begin{pmatrix} X \\ Y \end{pmatrix} + \begin{pmatrix} D \\ N \end{pmatrix} Q^{opt} \right\|_{\infty}}$*

Let  $(G_n)_n$  be a sequence of transfers such that  $G_n \xrightarrow{n \rightarrow \infty} G$  in the BIBO gap topology and  $C_{2_n}^{opt}$  (respectively  $C_2^{opt}$ ) be the optimal robust controller of  $G_n$  (respectively  $G$ ) relatively to coprime factor perturbations.

**Proposition 2.4** *If the greatest singular value of  $D^*X + N^*Y$  is of multiplicity one then*

1)  $b^{opt}(G_n) \xrightarrow{n \rightarrow \infty} b^{opt}(G)$

2)  $C_{2_n}^{opt} \xrightarrow{n \rightarrow \infty} C_2^{opt}$  *in the BIBO gap topology.*

So, the optimal robust stabilization problem in this context does not need further investigation beyond the work done in the standard feedback scheme case.

Let us now state the tracking problem we want to solve.

Consider here that we want to optimally track in  $L^{\infty}$  the output reference  $r$  defined by  $r(t) = 1$  for  $t \geq 0$ . In applications, it is difficult to be sure that we will be able to produce the precise reference output, we might as well produce a signal which is only “near” the reference signal. So, it is more realistic to try to track a family of reference signals. Here we choose to track the family  $\{r \in L^{\infty}, \|r\|_{L^{\infty}} = 1\}$ .

We have  $e_2 - r = (I - NU) r + (Y + QN)D d$ .

So the optimal tracking problem can be stated as:

$$\inf_{U \in \hat{\mathcal{A}}} \max_{\|r\|_{L^\infty}=1} \|(I - NU) r\|_{L^\infty}$$

But we have

$$\begin{aligned} \max_{\|r\|_{L^\infty}=1} \|(I - NU) r\|_{L^\infty} &= \|I - NU\|_{\langle 1 \rangle} \\ &= \|I - NU\|_{\hat{\mathcal{A}}} \\ &= \|\delta - nu\|_{\mathcal{A}} \end{aligned}$$

and the optimal tracking problem mathematically reduces to an  $\hat{\mathcal{A}}$  (or an  $\mathcal{A}$ )-optimization problem:

$$\inf_{U \in \hat{\mathcal{A}}} \|I - NU\|_{\hat{\mathcal{A}}}.$$

It will turn out that a more realistic problem is the general one

$$\inf_{U \in \hat{\mathcal{A}}} \|W(I - NU)\|_{\hat{\mathcal{A}}},$$

where  $W$  is a weight function.

### 3 Coprime factorizations and Bezout factors for a class of delay systems

#### 3.1 Generalities on delay systems

We consider in this paper linear systems with a finite number of delays in the state, the input and output. Such systems are described by the following equations:

$$(S) \quad \begin{cases} \dot{x}(t) &= \sum_{i=0}^k A_i x(t - t_i) + \sum_{i=0}^m B_i u(t - \tau_i) \\ y(t) &= \sum_{i=0}^l C_i x(t - \sigma_i) + \sum_{i=0}^p d_i u(t - \nu_i) \end{cases}$$

where  $x(t) \in \mathbb{R}^n$ ,  $u(t), y(t) \in \mathbb{R}$ ,  $A_i, B_i, C_i$  are  $n \times n$ ,  $n \times 1$  and  $1 \times n$  matrices and  $d_i \in \mathbb{R}$ .

The transfer function  $G$  of  $(S)$  is given by

$$G(s) = \left( \sum_{i=0}^m B_i e^{-s\tau_i} \right) \left( sI - \sum_{i=0}^k A_i e^{-st_i} \right)^{-1} \left( \sum_{i=0}^l C_i e^{-s\sigma_i} \right) + \sum_{i=0}^p d_i e^{-s\nu_i}.$$

We denote  $(S_0)$  the system without delay:

$$(S_0) \quad \begin{cases} \dot{x}(t) &= A_0 x(t) + B_0 u(t) \\ y(t) &= C_0 x(t) + d_0 u(t) \end{cases},$$

with  $G_0$  the transfer function and  $h_0$  the non atomic part of the impulse response of the system  $(S_0)$ .

Suppose that  $(S_0)$  is BIBO-stable that is  $h_0 + d_0 \delta \in L^1 + \mathbb{C}\delta$ .

Let us recall, for simplicity in the case  $n = 1$  ( $A_i, B_i, C_i$  are then denoted  $a_i, b_i, c_i$ ), how the different delays act on the BIBO-stability of  $(S)$ .

Suppose there is no delay in the state ( $a_i = 0, i = 1, \dots, k$ ). The impulse response  $g$  of  $G$  is of the form  $g = \sum_{i=0}^{m+l} \alpha_i \delta_{\beta_i} * h_0 + \sum_{i=1}^p d_i \delta_{\nu_i}$  with  $\alpha_i, \beta_i \in \mathbb{R}$ .

Obviously  $g \in L^1 + \sum_{i=0}^{\infty} \mathbb{C}\delta_{t-t_i}$ : the delays  $\tau_i, \sigma_i$  and  $\nu_i$  do not change the BIBO stability of  $(S_0)$ .

To see the effect of the delays  $t_i$  on the impulse response, we suppose that  $d_i = 0, i = 1, \dots, p$ .

$$\text{Let } y \in \mathbb{R}, |G(iy)| \leq \frac{\left(\sum_{i=0}^m |b_i|\right) \left(\sum_{i=0}^l |c_i|\right)}{\left|y - \sum_{i=0}^k a_i\right|}$$

We have  $|G(iy)| \xrightarrow{y \rightarrow \pm\infty} 0$  and this means that there is no impulse term in the impulse response. So the delays  $t_i$  do not contribute impulse terms to the impulse response. However they modify the  $L^1$ -part of the impulse response and can make it fail to be in  $L^1$ .

We are looking here at robustness of stability relatively to coprime factor perturbations; we recall that for strictly proper systems a change in the delay (in the input, output or state) corresponds to a variation in the BIBO gap topology.

**Proposition 3.1** *Let  $G_0 = G^0$  be the transfer function of the following system:*

$$\begin{cases} \dot{x}(t) &= Ax(t) + Bu(t) \\ y(t) &= Cx(t) \end{cases}$$

and  $G_T$  (respectively  $G^\tau$ ) be the transfer function of the delayed system :

$$\begin{cases} \dot{x}(t) &= Ax(t) + Bu(t - T) \\ y(t) &= Cx(t) \end{cases} \quad \text{or} \quad \begin{cases} \dot{x}(t) &= Ax(t) + Bu(t) \\ y(t) &= Cx(t - T) \end{cases}$$

$$\left( \text{respectively} \begin{cases} \dot{x}(t) &= Ax(t - \tau) + Bu(t) \\ y(t) &= Cx(t) \end{cases} \right)$$

then  $G_T - G_0 \xrightarrow{T \rightarrow 0} 0$  and  $G^\tau - G^0 \xrightarrow{\tau \rightarrow 0} 0$  in the BIBO gap topology.

**Proof** Note that the transfer functions in question are

$$\begin{aligned} G_T(s) &= C(sI - A)^{-1} B e^{-sT}, \quad \text{and} \\ G^\tau(s) &= C(sI - A e^{-sT})^{-1} B. \end{aligned}$$



Let  $(N, D)$  and  $(e^{-sT}N, D)$  be coprime factorizations over  $\hat{\mathcal{A}}$  of  $G_0$  and  $G_T$  respectively. Note that  $N$  and  $D$  are rational,  $N$  is strictly proper and  $D$  is proper but not strictly proper. Writing  $h_N$  for the impulse response of  $N$ , we have:

$$\|N - e^{-sT}N\|_{\hat{\mathcal{A}}} = \int_0^\infty |h_N(t) - h_N(t - T)| dt.$$

Using the fact that  $C_c(\mathbb{C})$  is dense in  $L^1(\mathbb{C})$  it is easy to prove that

$$\|N - e^{-sT}N\|_{\hat{\mathcal{A}}} \xrightarrow{T \rightarrow 0} 0.$$

The transfer function of the second class of system is

$$\begin{aligned} G^\tau(s) &= e^{s\tau}G^0(se^{s\tau}) \\ &= e^{s\tau}N(se^{s\tau})/D(se^{s\tau}) \\ &= N^\tau(s)/D^\tau(s), \text{ say.} \end{aligned}$$

It is easily verified that  $N^\tau \rightarrow N$  and  $D^\tau \rightarrow D$ , as  $\tau \rightarrow 0$ . □

More complicated results can be proven similarly, taking a collection of different delays, all tending to zero.

### 3.2 Coprime factorizations and Bezout factors for a class of delay systems

We consider the class of retarded delay systems with scalar transfer function given by  $G(s) = \frac{h_2(s)}{h_1(s)}$  where

$$h_1(s) = \sum_{i=0}^{n_1} p_i(s)e^{-\gamma_i s} \text{ and } h_2(s) = \sum_{i=0}^{n_2} q_i(s)e^{-\beta_i s} \text{ with } 0 = \gamma_0 < \gamma_1 \cdots < \gamma_{n_1},$$

$0 \leq \beta_0 < \beta_1 \cdots < \beta_{n_2}$ , the  $p_i$  being polynomials of degree  $\delta_i$  and  $\delta_i < \delta_0$  for  $i \neq 0$  and the  $q_i$  being polynomials of degree  $d_i < \delta_0$  for each  $i$ .

This class of systems was first analyzed by Bellman and Cooke [17]. They proved that these systems possess only finitely many poles in any right half plane.

**Proposition 3.2** Let  $G(s) = \frac{h_2(s)}{h_1(s)}$  where  $h_1(s)$  and  $h_2(s)$  defined as above.

There exists a polynomial  $r(s)$  such that  $\left(\frac{h_2(s)}{r(s)}, \frac{h_1(s)}{r(s)}\right)$  is a coprime factorization of  $G$  over  $\hat{\mathcal{A}}$ .

**Proof** We have  $\frac{h_2(s)}{(s+1)^{\delta_0}} = \sum_{i=0}^{n_2} \frac{q_i(s)e^{-\beta_i s}}{(s+1)^{\delta_0}}$  with  $\deg q_i < \delta_0$  so clearly

$\frac{h_2(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_-(0)$ . Now,  $\frac{h_1(s)}{(s+1)^{\delta_0}} = \sum_{i=0}^{n_1} \frac{p_i(s)e^{-\gamma_i s}}{(s+1)^{\delta_0}}$  with  $\deg p_0 = \delta_0$  and  $\deg p_i < \delta_0$  for  $i = 1, \dots, n_1$ , so  $\frac{h_1(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_\infty(0)$ .

As  $h_1$  has a finite number of unstable zeros we can test if there are common zeros  $\xi_i$  ( $i = 1, \dots, l$  with multiplicity  $m_i$ ) between  $h_2$  and  $h_1$ . If so, then

consider  $\frac{h_2(s)r(s)}{h_1(s)r(s)}$  with  $r(s) = \prod_1^l (s - \xi_i)^{m_i} (s + 1)^{\delta_0}$ . From [18], Lemma

7.1.15, we have that for  $\alpha < 0$ ,  $\prod_1^l \left(\frac{s - \alpha}{s - \xi_i}\right)^{m_i} \frac{h_2(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_-(0)$  and

$\prod_1^l \left(\frac{s - \alpha}{s - \xi_i}\right)^{m_i} \frac{h_1(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_-(0)$  from which we deduce that

$\frac{1}{\prod_1^l (s - \xi_i)^{m_i}} \frac{h_2(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_-(0)$  and  $\frac{1}{\prod_1^l (s - \xi_i)^{m_i}} \frac{h_1(s)}{(s+1)^{\delta_0}} \in \hat{\mathcal{A}}_\infty(0)$ .

Now, as  $\frac{h_2(s)}{r(s)}$  and  $\frac{h_1(s)}{r(s)}$  have no common zero in  $\{\Re(s) \geq 0\}$  we deduce that  $\left(\frac{h_2(s)}{r(s)}, \frac{h_1(s)}{r(s)}\right)$  is a coprime factorization of  $G$  over  $\hat{\mathcal{A}}_-(0)$ . We recall that if  $\frac{h_2(s)}{r(s)}$  and  $\frac{h_1(s)}{r(s)}$  were not coprime over  $\hat{\mathcal{A}}_-(0)$  they would necessarily have a common sequence of zeroes in  $\{\Re(s) \geq 0\}$  and as  $\frac{h_1(s)}{r(s)} \in \hat{\mathcal{A}}_\infty(0)$  the only possibility would be a finite common zero in  $\{\Re(s) \geq 0\}$ .  $\square$

**Remark 3.1** Instead of  $(s+1)^{\delta_0}$  we could take any polynomial having its inverse in  $\hat{\mathcal{A}}_\infty(0)$ . In fact it might be possible to chose  $r(s)$  such that  $\left(\frac{h_2(s)}{r(s)}, \frac{h_1(s)}{r(s)}\right)$  is a normalized coprime factorization over  $\hat{\mathcal{A}}_\infty(0)$ . For example,

in the case when there is just one delay in the input or output, that is  $G$  is of the form  $G(s) = e^{-sT} \frac{A(s)}{B(s)}$  where  $A$  and  $B$  are polynomials, we can deduce from the finite dimensional case [15] that there exists a polynomial  $r$  such that  $\left( \frac{e^{-sT} A(s)}{r(s)}, \frac{B(s)}{r(s)} \right)$  is a normalized coprime factorization of  $G$  over  $\hat{\mathcal{A}}$ .

We now give a formula for the Bezout factors in a coprime factorization of a retarded delay system. Recall that less explicit formulae have been given by Brethe and Loiseau [6] in the case of delay systems with commensurate time-delays.

**Theorem 3.1** *Let  $m$  be the number of unstable zeros  $\sigma$  of  $h_1(s)$  (which are not zeros of  $h_2$ ) counted with their multiplicity.*

$$\text{Let } X(s) = \frac{-\mu(s)}{u(s)} \text{ and } Y(s) = \frac{r(s) - \frac{\mu(s)h_2(s)}{u(s)}}{h_1(s)},$$

where  $\mu$  is a polynomial of degree  $m - 1$  chosen such that

$$\left( r(s) - \frac{\mu(s)h_2(s)}{u(s)} \right)^{(k)} = 0$$

at  $s = \sigma$  for  $k = 0, \dots, m_i - 1$  if  $\sigma$  is a zero of multiplicity  $m_i \geq 1$ ,  $u$  is a polynomial chosen such that its inverse is in  $\hat{\mathcal{A}}_-(0)$  and  $X$  is proper ( $\deg u \geq \deg \mu$ ).

Then  $X$  and  $Y$  are Bezout factors corresponding to the coprime factorizations  $\left( \frac{h_2(s)}{r(s)}, \frac{h_1(s)}{r(s)} \right)$  of  $G$  over  $\hat{\mathcal{A}}$ .

To prove this result we need a lemma of [19] which we recall here:

**Lemma 3.2** *Let  $\hat{g}$  be a holomorphic function on  $\mathbb{C}_\alpha^+$  such that  $s\hat{g}(s)$  is bounded on  $\mathbb{C}_\alpha^+$ . Then for any  $\xi > 0$  there exists an  $h$  such that  $\hat{g} = \hat{h}$  on  $\mathbb{C}_{\alpha+\xi}^+$  and  $\int_0^\infty e^{-(\alpha+\xi)t} |h(t)| dt < \infty$ .*

**Proof** Clearly,  $X(s) = \frac{-\mu(s)}{u(s)} \in \hat{\mathcal{A}}_-(0)$ . Let  $(\sigma_i)_{i=1,\dots,l}$  be the unstable zeros of  $h_1$  of multiplicity  $m_i$   $\left(\sum_{i=1}^l m_i = m\right)$ ,  $\mu$  is an interpolation polynomial of degree  $m - 1$  defined by the following  $m$  equations:

For  $i = 1, \dots, l$ ,

$$\left(r(s) - \frac{\mu(s)h_2(s)}{u(s)}\right)^{(k)} = 0 \text{ for } k = 0, \dots, m_i - 1 \text{ at } s = \sigma.$$

Note that as  $\sigma$  is not zero of  $h_2$ , for each  $i$  the  $m_i$  equations are solvable and have a unique solution.

Finally, each unstable zero of  $h_1$  of given multiplicity is a zero of the function  $\left(r(s) - \frac{\mu(s)h_2(s)}{u(s)}\right)$  with the same multiplicity. So, there exists  $\epsilon > 0$  such that  $Y(s)$  is analytic in  $\{\Re(s) > -\epsilon\}$ . Now, clearly  $Y(s) = C + Y_0(s)$  where  $C \in \mathbb{R}$  and  $sY_0(s)$  is bounded on  $\{\Re(s) > -\epsilon\}$ . So we can deduce from Lemma 3.2 that  $Y \in \hat{\mathcal{A}}_-(0)$ . Obviously,  $X$  and  $Y$  satisfy the Bezout equation  $-XN + YD = 1$ .  $\square$

**Example 3.3** Let  $G(s) = \frac{e^{-sT}}{s - \sigma}$  with  $\sigma \in \mathbb{R}$  and  $\gamma = \sqrt{1 + \sigma^2}$  we know that  $\left(\frac{e^{-sT}}{s + \gamma}, \frac{s - \sigma}{s + \gamma}\right)$  is a normalized coprime factorization of  $G$  over  $\hat{\mathcal{A}}$ . Corresponding Bezout factors are given by

$$X(s) = e^{T\sigma}(\sigma + \gamma), Y(s) = 1 + (\sigma + \gamma)\frac{1 - e^{-T(s-\sigma)}}{s - \sigma}.$$

Those factors depend on the delay but is this dependence continuous in the BIBO gap topology as it is the case for the normalized coprime factorizations? This continuity would be useful to establish convergence in the BIBO gap topology for controllers of the system with delays to controllers of the delay free system.

The next result proves more generally that Theorem 3.1 produces Bezout factors which are continuous respectively to variations of the coprime factors in the BIBO gap topology.

**Proposition 3.3** Suppose  $h_1$  has no zero on the imaginary axis and let  $G_\Delta = \left(\frac{h_2^\Delta(s)}{r(s)}, \frac{h_1^\Delta(s)}{r(s)}\right)$  such that  $\left(\frac{h_2^\Delta(s)}{r(s)}, \frac{h_1^\Delta(s)}{r(s)}\right) \xrightarrow{\Delta \rightarrow 0} \left(\frac{h_2(s)}{r(s)}, \frac{h_1(s)}{r(s)}\right)$  in the BIBO

gap topology. Then the Bezout factors  $X_\Delta$  and  $Y_\Delta$  given by Theorem 3.1 depend continuously on  $\Delta$ , in the BIBO gap topology.

**Proof** Let  $\Psi_\Delta : \mathbb{C}^m \rightarrow \mathbb{C}^m$  be the linear mapping defined by

$$\Psi_\Delta(\mu_0, \dots, \mu_{m-1})(k) = \left( \frac{\mu^\Delta(s) h_2^\Delta(s)}{u(s)} \right)^{(n(k))} (\sigma_k), \quad (k = 1, \dots, m)$$

where  $\mu(s) = \sum_{j=0}^{m-1} \mu_j s^j$ ,  $(\sigma_1, \dots, \sigma_m)$  denotes the unstable zeroes of  $h_1(s)$  taken with multiplicity and  $n(k)$  is the  $k$ th term of the finite sequence  $(0, \dots, m_1 - 1, 0, \dots, m_2 - 1, \dots, m_l - 1)$ , where  $l$  is the total number of distinct zeroes. The mapping  $\Psi_\Delta$  is continuous, linear and one-one and depends continuously on  $\Delta$ . Thus it has a continuous inverse. The polynomial  $\mu^\Delta$  which performs the interpolation is given by

$$\mu^\Delta = \Psi_\Delta^{-1}(r(\sigma_1), \dots, r^{(m_l-1)}(\sigma_m)),$$

and this also depends continuously on  $\Delta$ .

It is now easy to see that the corresponding Bezout factors  $X_\Delta = -\mu^\Delta/u$  and  $Y_\Delta = (r - \mu^\Delta(h_2^\Delta)/u)/h_1^\Delta$  depend continuously on  $\Delta$ .  $\square$

**Remark 3.4** If  $h_1$  has zeros on the imaginary axis, they may become stable zeros of  $h_1^\Delta$  for  $\Delta$  arbitrarily small. To obtain Bezout factors converging in this case, it is necessary to modify the construction of theorem 3.1, interpolating at the corresponding stable zeros of  $h_1^\Delta$ , as well as the unstable ones.

**Example 3.5** Consider  $G_T(s) = \frac{h_2^T(s)}{h_1^T(s)}$  with  $h_2^T(s) = e^{-sT} h_2(s)$  and  $h_1^T(s) = h_1(s)$  where  $h_2(s)$  and  $h_1(s)$  are polynomials as in remark 3.1 such that  $G_T(s)$  is strictly proper. As a variation in the delay is a variation in the BIBO gap topology, we can deduce from the above proposition that the Bezout factors  $X_T$  and  $Y_T$  of  $G_T$  depend in a continuous fashion on the delay  $T$ .

## 4 Some $L^1$ -optimization problems

The problem of optimal tracking is set as an optimization problem of the type

$$\inf_{r \in \hat{\mathcal{A}}} \|f - gr\|_{\hat{\mathcal{A}}} \quad \text{where } f, g \in \hat{\mathcal{A}} \quad (4.1)$$

We have

$$\inf_{r \in \hat{\mathcal{A}}} \|f - gr\|_{\hat{\mathcal{A}}} = d\left(f, \overline{(g)}\right),$$

where  $(g)$  denotes the principal ideal  $\{gr : r \in \hat{\mathcal{A}}\}$ .

Moreover  $d\left(f, \overline{(g)}\right) = 0$  for all  $f$  if and only if  $(g) = \hat{\mathcal{A}}$ , since otherwise  $(g)$  is contained in a proper maximal ideal, which is necessarily closed. (We refer to [20] for general background on Banach algebras). Now, clearly  $(g) = \hat{\mathcal{A}}$  if and only if  $g$  is invertible in  $\hat{\mathcal{A}}$ .

Hille and Phillips [21] give the following invertibility condition for elements in  $\hat{\mathcal{A}}$ :

$$\text{Let } f \in \hat{\mathcal{A}}. \text{ Then } f \text{ is invertible in } \hat{\mathcal{A}} \iff \inf_{\{\Re(s) \geq 0\}} |f(s)| > 0.$$

In the particular case of commensurate time delays, that is,  $g$  is of the form  $g = g_a + \sum_{i=0}^{\infty} g_i \delta_{t-T_i}$  with  $g_a \in L^1$  (and we write  $g \in L^1 \oplus \ell^1$ ), we can give a more explicit condition of invertibility.

**Theorem 4.1** *Let  $g = g_a + \sum_{i=0}^{\infty} g_i \delta_{t-T_i}$  with  $g_a \in L^1$ ,  $\sum_{i=0}^{\infty} |g_i| < \infty$ .*

*Then  $g$  is invertible in  $L^1 \oplus \ell^1$   $\iff$   $\begin{cases} \hat{g}(s) \neq 0 & \text{on } \{\Re(s) \geq 0\} \text{ and} \\ \sum_{i=0}^{\infty} g_i z^i \neq 0 & \text{on } \{|z| \leq 1\} \end{cases}$*

**Proof** We have that:

$$g \text{ is invertible in } L^1 \oplus \ell^1 \iff \Phi(g) \neq 0 \quad \forall \Phi \in \Delta,$$

where  $\Delta$  is the set of all characters on  $L^1 \oplus \ell^1$ .

Recall that a character  $\Phi$  is a complex homomorphism  $\Phi : L^1 \oplus \ell^1 \longrightarrow \mathbb{C}$  with

$$\Phi(1) = 1, \Phi(f + g) = \Phi(f) + \Phi(g), \Phi(f * g) = \Phi(f)\Phi(g).$$

It is well-known (cf. [20]) that any character on  $L^1$  that does not vanish there takes the form  $\Phi(f) = \hat{f}(s_0)$  for some  $s_0 \in \{\Re(s) \geq 0\}$ . Then  $\Phi(f * \delta_{t-nT}) = (f * \delta_{t-nT})^\wedge(s_0) = f(s_0)e^{-s_0nT}$ , so that  $\Phi(\delta_{t-nT}) = e^{-s_0nT}$  and so  $\Phi(f) = \hat{f}(s_0)$  for all  $f \in L^1 \oplus \ell^1$ .

If  $\Phi$  vanishes on  $L^1$  then it acts as a character on  $\ell^1$  and thus takes the form  $\Phi(\delta_{t-nT}) = w^n$  for some  $w$  with  $|w| \leq 1$ .

So finally,  $\Delta = \{\delta_\omega, \omega \in \{\Re(s) \geq 0\} \cup \{|z| \leq 1\}\}$  where

$$\text{for } \omega \in \{\Re(s) \geq 0\} \quad \delta_\omega(g) = \hat{g}(\omega)$$

$$\begin{aligned} \text{for } \omega \in \{|z| \leq 1\} \quad & \delta_\omega(g_a) = 0 \text{ if } g \in L^1 \\ & \delta_\omega(\delta_{t-Tn}) = \omega^n \text{ for } n \geq 0. \end{aligned}$$

So we have:

$$g \text{ is invertible in } L^1 \oplus \ell^1 \iff \begin{cases} \hat{g}(s) \neq 0 \text{ on } \{\Re(s) \geq 0\} \text{ and} \\ \sum_{i=0}^{\infty} g_i z^i \neq 0 \text{ on } \{|z| \leq 1\} \end{cases}$$

**Remark 4.1** In the case of the simpler algebra  $L^1 + \mathbb{C}\delta$  we have  $g_a + g_0\delta$  is invertible in  $L^1 + \mathbb{C}\delta$  if and only if  $\hat{g}_a(s) + g_0 \neq 0$  on  $\{\Re(s) \geq 0\}$  and  $g_0 \neq 0$  that is  $\hat{g}(s) \neq 0$  on the extended right half plane.

**Remark 4.2** In the case where  $g$  is not invertible in  $L^1 \oplus \ell^1$ , the necessary and sufficient condition of theorem 4.1 being not satisfied, we can be able to give a lower bound for  $\inf_{r \in \mathcal{A}} \|f - gr\|_{\mathcal{A}}$ . If there is a character  $\Phi$  such that  $\Phi(g) = 0$ , then  $\Phi(gr) = 0$  also and so  $\Phi(f - gr) = \Phi(f)$ . Hence  $\|f - gr\|_{\mathcal{A}} \geq |\Phi(f - gr)| = |\Phi(f)|$  i.e  $\|f - gr\|_{\mathcal{A}} \geq \sup_{\{\Phi: \Phi(g)=0\}} |\Phi(f)|$ .

We consider now the resolution of equations of the type 4.1 firstly in the case which motivated our study, the delay integrator, and so consider in the next paragraph delay systems of the type  $G(s) = \frac{e^{-sT}}{s - \sigma}$ . We will consider more general systems in the paragraph 4.2.

### 4.1 The case when $G(s) = \frac{e^{-sT}}{s - \sigma}$

Let  $G(s) = \frac{e^{-sT}}{s - \sigma}$ ,  $T > 0$ ,  $\sigma \in \mathbb{R}$ .

A normalized coprime factorization of  $G$  is given by

$$N(s) = \frac{e^{-sT}}{s + \gamma}, \quad D(s) = \frac{s}{s + \gamma}.$$

where  $\gamma = \sqrt{1 + \sigma^2}$ .

The optimal tracking problem is:

$$\inf_{U \in \hat{\mathcal{A}}} \|I - NU\|_{\hat{\mathcal{A}}} = \inf_{u \in \mathcal{A}} \|\delta - un\|_{\mathcal{A}} = d(\delta, (e^{-\gamma t} * \delta_{t-T}))$$

By a convenient abuse of notation, we will write  $d\left(I, \left(\frac{e^{-sT}}{s + \gamma}\right)\right)$  instead of  $d(\delta, (e^{-\gamma t} * \delta_{t-T}))$ . This can be easily solved using the finite dimensional results of Vidyasagar. We recall here two useful lemmas of [22]

**Lemma 4.3** [22] Suppose  $k \geq 1$  is an integer, and let  $\hat{g}(s) = \left(\frac{1}{s + 1}\right)^k$ .

Then  $\overline{(g)} = L^1$

**Lemma 4.4** [22] Suppose  $g \in \mathcal{A}$ , that  $\hat{g}$  is rational, and construct a rational function  $\hat{h} \in \hat{\mathcal{A}}$  as follows:  $g$  is a multiple of  $h$ , every zero of  $\hat{g}$  in the open RHP is also a zero of  $\hat{h}$  with the same multiplicity, and every zero of  $\hat{g}$  on the extended  $j\omega$  axis is a simple zero of  $\hat{h}$ . Then  $\overline{(g)} = \overline{(h)}$

**Proposition 4.1** Let  $N(s) = \frac{e^{-sT}}{s + \gamma}$ . Then we have  $\overline{(N)} = L^1[T, \infty)$  and  $\inf_{U \in \hat{\mathcal{A}}} \|I - NU\|_{\hat{\mathcal{A}}} = 1$ , the infimum being attained for  $U^{opt} = 0$ .



**Proof** By Lemmas 4.3 and 4.4, we have  $\overline{\left(\frac{1}{s+\gamma}\right)} = L^1$  and obviously  $\overline{\left(\frac{e^{-sT}}{s+\gamma}\right)} = L^1[T, \infty)$ . Now,  $d(\delta, L^1[T, \infty)) = 1$  and  $U = 0$  gives  $\|I - NU\|_{\hat{\mathcal{A}}} = 1$ .  $\square$

Those results on the infimum and optimal function are not surprising as tracking in  $L^\infty$  is very demanding. So the idea is to consider here a weighted optimization problem of the form  $\inf_{U \in \hat{\mathcal{A}}} \|W(I - NU)\|_{\hat{\mathcal{A}}}$  where  $W$  is a weight which will help minimize the tracking error particularly at low frequencies rather than high frequencies. We can consider for example  $W_1(s) = \frac{1}{s+1}$ ,  $W_2(s) = \frac{s+a}{s+b}$  with  $a > 0, b > 0$  or  $W_3(s) = \frac{1}{\rho s+1}$ .

**Theorem 4.2** *For weights  $W_1, W_2$  and  $W_3$ , the optimal tracking error of the weighted problem is given by:*

$$\begin{aligned} \inf_{U \in \hat{\mathcal{A}}} \|W_1(I - NU)\|_{\hat{\mathcal{A}}} &= 1 - e^{-T} \\ \inf_{U \in \hat{\mathcal{A}}} \|W_2(I - NU)\|_{\hat{\mathcal{A}}} &= 1 + |a - b|(1 - e^{-bT}) \\ \inf_{U \in \hat{\mathcal{A}}} \|W_3(I - NU)\|_{\hat{\mathcal{A}}} &= 1 - e^{-\frac{T}{\rho}} \end{aligned}$$

**Proof** For  $i = 1, 3$ , we have  $\inf_{U \in \hat{\mathcal{A}}} \|W_i(I - NU)\|_{\hat{\mathcal{A}}} = d(W_i, (W_i N))$ . Applying Lemma 4.4 we get  $\overline{\left(W_i \frac{1}{s+\gamma}\right)} = L^1$  and  $\overline{\left(W_i e^{-sT} \frac{1}{s+\gamma}\right)} = L^1[T, \infty)$ . Now,

$$\begin{aligned} d(W_1, (W_1 N)) &= d(e^{-T}, L^1[T, \infty)) \\ &= \int_0^T e^{-t} dt = 1 - e^{-T}, \end{aligned}$$

$$\begin{aligned} d(W_2, (W_2 N)) &= d(\delta + (a - b)e^{-bT}, L^1[T, \infty)) \\ &= 1 + |a - b|(1 - e^{-bT}), \end{aligned}$$

$$\begin{aligned} d(W_3, (W_3N)) &= d(\delta + (a - b)e^{-bT}, L^1[T, \infty)) \\ &= 1 - e^{-\frac{T}{\rho}}. \end{aligned}$$

□

**Remark 4.5** As the infimum is not attained, we cannot define  $U^{opt}$ , however it is possible to construct a sequence  $(U_\epsilon)_\epsilon$  such that

$\|W_1(I - NU_\epsilon)\|_{\hat{\mathcal{A}}} \xrightarrow{\epsilon \rightarrow 0^+} \inf_{U \in \hat{\mathcal{A}}} \|W_1(I - NU)\|_{\hat{\mathcal{A}}}$ . For example, the sequence

$U_\epsilon(s) = e^{-T} \frac{s + \gamma}{\epsilon s + 1}$  will achieve that.

## 4.2 A more general case

In this section, we determine the ideal in  $\hat{\mathcal{A}}$  generated by  $L^1$  functions which are not necessarily rationals.

The case of  $L^1$  functions whose Laplace transform does not vanish on  $\{\Re(s) \geq 0\}$  has been considered by Nymen (a simpler and more accessible proof of this result can be found in [23]).

**Theorem 4.3** [23] *Let  $f \in L^1$ . Then  $\overline{(f)} = L^1$  if and only if  $\alpha(f) = 0$  and  $\hat{f}(s) \neq 0$  in  $\{\Re(s) \geq 0\}$ .*

Now, we want to consider the more general case where  $f$  has a finite number of zeros in  $\{\Re(s) \geq 0\}$  to be able to cover for example the case of delay systems of the type  $G(s) = e^{-sT}R(s)$  where  $R(s)$  is a rational function having zeros in  $\{\Re(s) \geq 0\}$ . The next theorem shows that the result of Nymen extends naturally to the case of zeros in  $\{\Re(s) > 0\}$ .

**Theorem 4.4** *Suppose  $g \in L^1$ ,  $\alpha(g) = T$  and  $\hat{g}$  has a finite number of zeros  $a_i$ ,  $i = 1, \dots, l$ , in  $\{\Re(s) > 0\}$  and no zero on the imaginary axis. Then  $\overline{(g)} = \{k \in L^1[0, \infty), k(a_i) = 0, i = 1, \dots, l, \alpha(k) \geq T\}$ .*

**Proof** We prove this result in the case where  $T = 0$  and there is only one zero in  $\{\Re(s) > 0\}$ , the extension to the case of several zeros is straightforward by induction. The case  $T > 0$  is immediately deduced.

Let  $g \in L^1$ ,  $\alpha(g) = 0$  and  $\hat{g}(a_0) = 0$  for  $a_0$  in  $\{\Re(s) > 0\}$  otherwise  $\hat{g}(s) \neq 0$

on  $\{\Re(s) \geq 0\}$ .

Now, let  $\hat{g}_1(s) = \frac{\hat{g}(s)}{s - a_0}$  we show first that  $g_1 \in L^1[0, \infty)$ .

For we can write  $g_1 = g * \epsilon$  where  $\epsilon(t) = \begin{cases} e^{a_0 t} & \text{on } (-\infty, 0] \\ 0 & \text{on } (0, \infty) \end{cases}$

Clearly,  $g \in L^1(-\infty, \infty)$  as  $\|g_1\|_{L^1(-\infty, \infty)} \leq \|g\|_{L^1[0, \infty)} \|\epsilon\|_{L^1(-\infty, 0)}$ .

Now, we have  $g_1(t) = \int_{-\infty}^{\infty} \epsilon(t-s)g(s)ds = \int_0^{\infty} \epsilon(t-s)g(s)ds$ .

For  $t \leq 0$ ,  $g_1(t) = \int_0^{\infty} e^{a_0(t-s)}g(s)ds = \hat{g}(a_0) = 0$ , so  $g_1$  is in  $L^1[0, \infty)$ .

Now, let us prove that  $\{k \in L^1, \hat{k}(a_0) = 0, \alpha(k) \geq 0\} \subset \overline{(g)}$  (the other inclusion is obvious).

Let  $k \in L^1$  with  $k(a_0) = 0$  and  $k_1(s) = \frac{k(s)}{s - a_0}$ .

We have  $k \frac{s + a_0}{s - a_0} = k \left( 1 - \frac{2a_0}{s - a_0} \right) = k - \frac{2a_0 k}{s - a_0}$ .

So  $k \frac{s + a_0}{s - a_0} \in L^1[0, \infty)$  and has no zero in  $\{\Re(s) \geq 0\}$ . From theorem 4.3 we

know there exists a sequence  $(\phi_n)_{n=1}^{\infty}$  in  $\hat{\mathcal{A}}$  such that  $k \frac{s + a_0}{s - a_0} = \lim_{n \rightarrow \infty} g \frac{s + a_0}{s - a_0} \phi_n$

that is  $k = \lim_{n \rightarrow \infty} g \phi_n$  and  $k \in \overline{(g)}$ .  $\square$

The case of  $L^1$  functions which have zeros on the imaginary axis is difficult unless those functions are of the type  $e^{-st}R(s)$  with  $R$  rational in which case we can determine  $\overline{(g)}$  using the finite dimensional results of Vidyasagar.

## 5 Conclusion

For delay systems which have a coprime factorization  $(N, D)$  over  $\hat{\mathcal{A}}$  with  $N \in L^1$  and  $N$  has only a finite number of zeros in  $\{\Re(s) > 0\}$  the robust control problem set in section 2 can be solved using the following algorithm:

Step 1: Find  $\{U_\epsilon\}_{\epsilon \geq 0}$  such that  $\|W(I - NU_\epsilon)\|_{\hat{\mathcal{A}}} \xrightarrow{\epsilon \rightarrow 0} \inf_{U \in \hat{\mathcal{A}}} \|W(I - NU)\|_{\hat{\mathcal{A}}}$ .

Step 2: Find  $(G_n)_{n \geq 0}$  a sequence of finite dimensional transfer function such that  $G_n \xrightarrow{n \rightarrow \infty} G$  in the BIBO gap topology.

Step 3: Find  $Q_n^{opt}$  such that

$$\left\| \begin{pmatrix} X_n \\ Y_n \end{pmatrix} + \begin{pmatrix} D_n \\ N_n \end{pmatrix} Q_n^{opt} \right\|_{\infty} = \inf_{Q_n \in H_{\infty}} \left\| \begin{pmatrix} X_n \\ Y_n \end{pmatrix} + \begin{pmatrix} D_n \\ N_n \end{pmatrix} Q_n^{opt} \right\|_{\infty}$$

.

Choose  $\epsilon^*$  small, define  $C_1^{opt} = \frac{U^{\epsilon^*}}{Y + NQ^{opt}}$  and construct the controllers:

$$C_{1_n}^0 = \frac{U^{\epsilon^*}}{Y_n + N_n Q_n^{opt}} \quad \text{and} \quad C_{2_n}^0 = \frac{X_n + D_n Q_n^{opt}}{Y_n + N_n Q_n^{opt}}.$$

$C_{2_n}^0$  is a finite dimensional controller,  $C_{1_n}^0$  can be an infinite dimensional controller.

**Proposition 5.1** *We have:*


*If the greatest singular value of  $D^*X + N^*Y$  is of multiplicity one then*

1)  $b^{opt}(G_n) \xrightarrow{n \rightarrow \infty} b^{opt}(G)$

2)  $C_{1_n}^0 \xrightarrow{n \rightarrow \infty} C_1^{opt}$  *in the BIBO gap topology.*

3)  $C_{2_n}^0 \xrightarrow{n \rightarrow \infty} C_2^{opt}$  *in the BIBO gap topology.*

For systems of the type  $G(s) = e^{-st}R(s)$  we might have a more direct implementation. If for  $\eta \in \mathbb{N}$ ,  $\eta$  big,  $Q_{\eta}^{opt}$  is such that  $Y_{\eta} + N_{\eta}Q_{\eta}^{opt}$  is invertible in  $\hat{\mathcal{A}}$  then  $C_{1_{\eta}}^0$  is stable and we can use the following two-parameter compensator scheme:

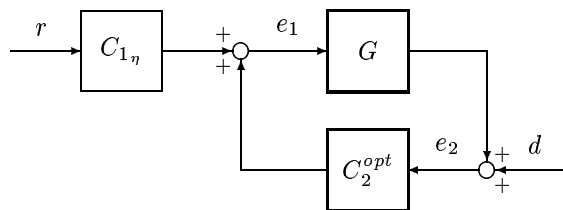

where for  $C_2^{opt}$  we can take the closed form formula of the optimal robust controller determined by Dym, Georgiou and Smith [24] so that we get in this scheme an optimal robust controller and suboptimal tracking controller.

## References

- [1] F. M. Callier and C. A. Desoer, “An algebra of transfer functions of distributed linear time-invariant systems,” *IEEE Transactions on Circuits and Systems*, vol. 25, pp. 651–662, 1978.
- [2] P. M. Mäkilä and J. R. Partington, “Robust stabilization-BIBO stability, distance notions and robustness optimization,” *Automatica*, vol. 23, pp. 681–693, 1993.
- [3] J. R. Partington and P. M. Mäkilä, “Worst-case analysis of identification – BIBO robustness for closed-loop data,” *IEEE Transactions on Automatic Control*, vol. 39, pp. 2171–2176, 1994.
- [4] T. T. Georgiou and M. C. Smith, “Robust stabilization in the gap metric: controller design for distributed plants,” *IEEE Transactions on Automatic Control*, vol. 37, pp. 1133–1143, 1992.
- [5] E. W. Kamen, P. P. Khargonekar, and A. Tannenbaum, “Proper stable Bezout factorizations and feedback control of linear time-delay systems,” *International Journal of Control*, vol. 43, pp. 837–857, 1986.
- [6] D. Brethe and J.-J. Loiseau, “Stabilization of time-delay systems.” to appear.

- [7] H. Glüsing-Luerßen, “A behavioral approach to delay-differential systems.” to appear.
- [8] M. Vidyasagar, “Optimal rejection of persistent bounded disturbances,” *IEEE Transactions on Automatic Control*, vol. 31, pp. 527–534, 1986.
- [9] M. A. Dahleh and J. B. Pearson, “ $\ell^1$ -optimal compensators for continuous-time systems,” *IEEE Transactions on Automatic Control*, vol. 32, pp. 889–895, 1987.
- [10] M. A. Dahleh and J. B. Pearson, “ $\ell^1$ -optimal feedback controllers for mimo discrete-time systems,” *IEEE Transactions on Automatic Control*, vol. 32, pp. 314–322, 1987.
- [11] M. A. Dahleh and J. B. Pearson, “Minimization of a regulated response to a fixed input,” *IEEE Transactions on Automatic Control*, vol. 33, pp. 924–930, 1988.
- [12] M. A. Dahleh and J. B. Pearson, “Optimal rejection of persistent disturbances, robust stability, and mixed sensitivity minimization,” *IEEE Transactions on Automatic Control*, vol. 33, pp. 722–731, 1988.
- [13] O. J. Staffans, “The four-block model matching problem in  $\ell^1$  and infinite-dimensional linear programming,” *SIAM Journal of Control and Optimization*, vol. 31, pp. 747–779, 1993.
- [14] C. Bonnet and J. R. Partington, “Robust stabilization in the BIBO gap topology.” to appear in *International Journal of Robust and Nonlinear Control*.
- [15] D. C. McFarlane and K. Glover, *Robust controller design using normalized coprime factor descriptions*. Springer-Verlag, 1989.
- [16] M. Vidyasagar, *Control System Synthesis*. MIT Press, 1985.
- [17] R. Bellman and K. L. Cooke, *Differential-difference equations*. Academic Press, 1963.

- [18] R. F. Curtain and H. J. Zwart, *An introduction to Infinite Dimensional Linear Systems Theory*. Springer Verlag, 1995.
- [19] S. Mossaheb, “On the existence of right coprime factorizations for functions meromorphic in a half-plane,” *IEEE Transactions on Automatic Control*, vol. 25, pp. 550–551, 1980.
- [20] W. Rudin, *Functional Analysis*. McGraw-Hill, 1973.
- [21] E. Hille and R. S. Phillips, *Functional analysis and semi-groups*. Amer. Math. Soc, 1957.
- [22] M. Vidyasagar, “Further results on the optimal rejection of persistent bounded disturbances,” *IEEE Transactions on Automatic Control*, vol. 36, pp. 642–652, 1991.
- [23] H. G. Dales, *Banach algebras and automatic continuity*. Oxford University Press. To appear.
- [24] H. Dym, T. T. Georgiou, and M. C. Smith, “Explicit formulas for optimally robust controllers for delay systems,” *IEEE Transactions on Automatic Control*, vol. 40, pp. 656–669, 1995.



---

Unité de recherche INRIA Lorraine, Technopôle de Nancy-Brabois, Campus scientifique,  
615 rue du Jardin Botanique, BP 101, 54600 VILLERS LÈS NANCY  
Unité de recherche INRIA Rennes, Irista, Campus universitaire de Beaulieu, 35042 RENNES Cedex  
Unité de recherche INRIA Rhône-Alpes, 655, avenue de l'Europe, 38330 MONTBONNOT ST MARTIN  
Unité de recherche INRIA Rocquencourt, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex  
Unité de recherche INRIA Sophia-Antipolis, 2004 route des Lucioles, BP 93, 06902 SOPHIA-ANTIPOLIS Cedex

---

Éditeur  
INRIA, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex (France)  
ISSN 0249-6399