



**HAL**  
open science

## Quasi-diffraction limited emission from an array of tapered laser diodes in volume Bragg grating external cavities

David Pabœuf, Gaëlle Lucas-Leclin, Nicolas Michel, Michel Calligaro, Michel Krakowski, Patrick Georges

### ► To cite this version:

David Pabœuf, Gaëlle Lucas-Leclin, Nicolas Michel, Michel Calligaro, Michel Krakowski, et al.. Quasi-diffraction limited emission from an array of tapered laser diodes in volume Bragg grating external cavities. CLEO Europe, Jun 2009, Munich, Germany. hal-00534775

**HAL Id: hal-00534775**

**<https://hal-iogs.archives-ouvertes.fr/hal-00534775>**

Submitted on 10 Nov 2010

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Quasi-diffraction limited emission from an array of tapered laser diodes in volume Bragg grating external cavities

David Paboef<sup>1</sup>, Gaëlle Lucas-Leclin<sup>1</sup>, Nicolas Michel<sup>2</sup>, Michel Calligaro<sup>2</sup>, Michel Krakowski<sup>2</sup>, Patrick Georges<sup>1</sup>


1. Laboratoire Charles Fabry de l'Institut d'Optique, CNRS, Univ Paris-Sud, Campus Polytechnique, RD128, 91127 Palaiseau Cedex, France
2. Alcatel-Thales III-V Lab, RD128, 91767 Palaiseau – France

High-brightness single laser diodes based on the widespread taper design have demonstrated output powers of a few Watts with a single transverse mode operation [1]. The use of arrays of such lasers result in a further increase of the laser power, but with the drawback of a loss in the spatial brightness. To overcome this limitation numerous external-cavity configurations have been proposed which induce a coherence between the individual emitters of the array and result in a brightness improvement [2]. In this work we describe two external cavities intended to improve the spatial brightness of a bar of  $N = 6$  index-guided tapered laser diodes emitting around 975 nm. The lateral structure of the emitters consists of a short ridge single-mode section, a 2.3 mm-long narrow-angle tapered ridge and a common amplified free-space 0.2 mm-long section. The array pitch is  $p = 30 \mu\text{m}$ , and the near-field  $1/e^2$  full-width ( $1/e^2$ -FW) of each emitter is  $30 \mu\text{m}$  too, so the filling factor of this array is 100% on the front facet and the emission section is  $w = 180 \mu\text{m}$  wide. No adjacent coupling between emitters is evidenced in the free running laser emission of the array alone, and its  $1/e^2$ -FW divergence is  $\sim 80$  mrad in the slow axis. Our external cavity designs aim at controlling the slow-axis beam divergence of the whole array by inducing an angular-filtered feedback into the lasers [3,4]. The configuration forces the array to operate in the out-of-phase mode, which has two main lobes in its far-field profile at  $\pm \lambda/2p = \pm 16$  mrad. We take benefit of the angular selectivity of volume Bragg gratings to favour an asymmetrical feedback on one of these peaks. The far-field of the extended-cavity array is thus expected to exhibit one diffraction-limited peak in the symmetric direction (Figure 1). Two different setups have been investigated experimentally:


In the design T (figure 1), a transmission Bragg grating with a diffraction efficiency of 90% and a full-width at half-maximum (FWHM) angular selectivity of 9 mrad is inserted in the external cavity. A high reflection dielectric mirror reflects the diffracted beam back into the emitters. We observed a narrow 6 mrad-FWHM peak in the slow-axis far-field profile, which contains 30% of the output power. The peak width is close to the diffraction limit  $\lambda/w = 5$  mrad, and its  $M^2$  parameter is  $< 2$ . The maximum output power reaches 1.3 W at 3A.

In the design R (figure 1) a reflection Bragg grating with a reflectivity  $R \geq 99\%$  at  $\lambda_B = 979$  nm and a spectral bandwidth  $\delta\lambda \approx 0.3$  nm reflects the output beam at the angle of  $+\lambda/2p$ . The angular selectivity of the grating is about  $\Delta\theta_R = 35$  mrad. A narrow peak appears in the far-field at  $-\lambda/2p$  which contains up to 50% of the total output power (figure 2), with a  $M^2$  parameter  $< 2$ . Furthermore the laser spectrum is locked to the Bragg wavelength  $\lambda_B$  resulting in a  $< 0.1$  nm-wide stabilized line. The total output power reaches 700 mW at 3 A.

These two configurations both result in quasi-diffraction limited far-field profiles and similar output powers in the main lobe; nevertheless the setup R allows concurrent spectrum stabilization.

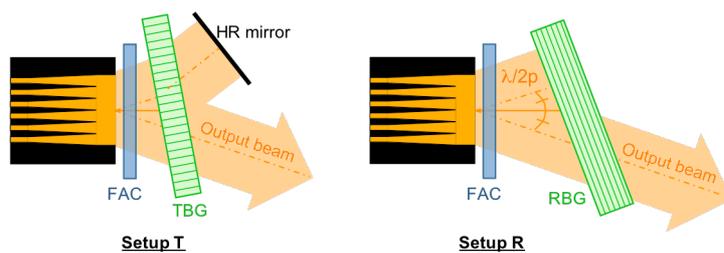

**Fig. 1** Experimental external cavity setups; FAC = fast-axis collimation lens, TBG = transmission Bragg grating, RBG = reflection Bragg grating.

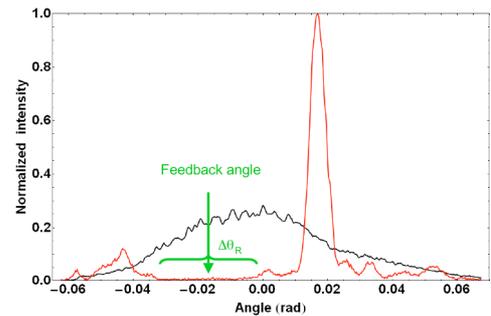

**Fig. 2** Far-field profile of the free-running array (black) and of the external-cavity array in the R setup (red) at  $I = 2.4$  A.

## Acknowledgments

The authors thank the European Community for financial support under the www.BRIGHTER.eu program (IP 035266). D. Paboef acknowledges the funding of his PhD by the French Délégation Générale de l'Armement.

## References

- [1] H. Wenzel, B. Sumpf, G. Erbert, « High-brightness diode lasers », *C. R. Physique* **4**, 649 (2003)
- [2] D. Paboef, G. Lucas-Leclin, P. Georges, N. Michel, M. Krakowski, J. Lim, S. Sujecki, and E. Larkins, "Narrow-line coherently combined tapered laser diodes in a Talbot external cavity with a volume Bragg grating", *App. Phys. Lett.* **93**, 211102 (2008)
- [3] C. J. Chang-Hasnain, J. Berger, D. R. Scifres, W. Streifer, J. R. Whinnery, and A. Dienes, "High power with high efficiency in a narrow single-lobed beam from a diode laser array in an external cavity", *App. Phys. Lett.* **50**, 1465 (1987)
- [4] A. Barthelemy, F. Louradour and V. Courderc, "Wavelength-tunable diffraction-limited operation of a standard high-power diode-laser array using an off-centered extended cavity", *Elec. Lett.* **28**, 2038 (1992)