



HAL
open science

Eigensolutions of perturbed nearly defective matrices

Angelo Luongo

► **To cite this version:**

Angelo Luongo. Eigensolutions of perturbed nearly defective matrices. *Journal of Sound and Vibration*, 1995, 185 (3), pp.377-395. hal-00801833

HAL Id: hal-00801833

<https://hal.science/hal-00801833>

Submitted on 18 Mar 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

EIGENSOLUTIONS OF PERTURBED NEARLY DEFECTIVE MATRICES

A. LUONGO

*Department of Structural Engineering, University of L'Aquila, Monteluco di Roio,
67040 L'Aquila, Italy*

Perturbation methods for approximating eigenvalues and eigenvectors of perturbed nearly defective (mistuned) systems have been discussed. It is shown that the mistuning causes Taylor expansions to be not uniformly valid even in small intervals of the perturbation parameter, subsequently rendering them useless for practical purposes. The problem is overcome by starting the perturbation expansion from an exactly defective (tuned) system "close" to the mistuned one. Asymptotic expansions are then obtained in terms of fractional powers of two parameters: the modification and the mistuning parameter. However, as the tuned system is unknown, an inverse problem has to be solved in order to determine it. An algorithm valid for the particular but frequent case of several couples of nearly coincident eigenvalues has been detailed for this problem; an outline of a more general case is also given. Illustrative examples are presented.

1. INTRODUCTION

Perturbation methods are efficient tools for computing eigensolutions of perturbed matrices. They permit the construction of asymptotic expansions approximating the exact eigensolutions near known unperturbed values, when one or more parameters are varied in small ranges. The coefficients of the asymptotic expansions are often called the sensitivities of the eigensolutions; they represent the (directional) derivatives of eigenvalues and eigenvectors with respect to the perturbation parameters. Some background on the perturbation theory of the eigenvalues can be found in the books by Wilkinson [1] and Kato [2].

Many papers have been devoted to eigensolutions sensitivity in which perturbation methods or equivalent methods of explicit differentiation have been employed. Most of them deal with self-adjoint systems; others with general systems. References can be found in the surveys by Adelman and Haftka [3] and Murthy and Haftka [4] as well as in the book by Brandon [5]. The problem of multiple eigenvalues has also been taken into account, but almost exclusively as regards self-adjoint systems (by Mills-Curran [6], Daily [7], and How and Kenny [8]) or non-defective, non-self-adjoint systems (Juang *et al.* [9]). Indeed, when a multiple eigenvalue occurs in a general system, its geometric multiplicity is often smaller than the algebraic multiplicity; so the (proper) eigenvectors of the system do not span the whole space, and generalized eigenvectors have to be introduced (e.g., see the book by Friedman [10]). Such systems are said to be *defective*. In mechanics, non-proportional damping or non-conservative effects (such as follower forces) are required in order for a system to be defective; in fact, conservative or proportionally damped systems always have a complete set of eigenvectors.

Eigenderivatives of general defective systems have been studied by the author in reference [11] by utilizing perturbation methods; an application to a mechanical problem has also been presented in reference [12]. It has been shown there that the eigensolutions of defective systems are strongly sensitive to perturbations, since asymptotic expansions involve fractional powers of the perturbation parameter. A different approach to the problem was followed in the paper by Triantafyllou and Triantafyllou [13], in which a geometric theory was developed to explain the frequency coalescence phenomenon. In addition, a sensitivity analysis of simple conservative and dissipative systems was performed; however, no general computational methods for large systems analysis have been given.

Defective systems, however, represent exceptional cases. More often systems having close eigenvalues are encountered (mistuned systems), instead of perfectly coincident (tuned systems). In these cases, if the associated eigenvectors make groups of nearly parallel vectors, the system can be classified as *nearly defective*. If a standard procedure of sensitivity analysis for distinct eigenvalues is applied to such a system, series expansions are obtained, valid in very narrow regions of the space of the parameters, even if the mistuning is not very small; therefore they are useless for practical purposes.

This circumstance can easily be illustrated by a simple example. Consider the matrix

$$\hat{A}(\xi) = \begin{bmatrix} 1 & 1 \\ \xi & 1 \end{bmatrix}, \quad (1)$$

depending on one small parameter $\xi \ll 1$. It admits two nearly coincident eigenvalues $\hat{\lambda}_{1,2}(\xi) = 1 \pm \xi^{1/2}$ and two nearly parallel eigenvectors $\hat{u}_{1,2}(\xi) = \{1, \pm \xi^{1/2}\}^T$; therefore it is nearly defective with mistuning $\xi^{1/2}$. Now perturb the matrix \hat{A} as

$$\tilde{A}(\xi, \eta) = \begin{bmatrix} 1 & 1 + \eta \\ \xi + \eta & 1 \end{bmatrix}, \quad (2)$$

where $\eta \ll 1$ is a second small parameter. The eigenvalues of the perturbed matrix \tilde{A} are $\tilde{\lambda}_{1,2}(\xi, \eta) = 1 \pm [(1 + \eta)(\xi + \eta)]^{1/2}$. By expanding them for small η and *keeping* ξ *fixed* the following expression is obtained:

$$\tilde{\lambda}_{1,2}(\xi, \eta) = \hat{\lambda}_{1,2}(\xi) \pm \eta \{(1 + \xi)/2\xi^{1/2}\} + O(\eta^2). \quad (3)$$

This expansion is not uniformly valid, since the second term is of the same order of or larger than the first term when $\eta \geq O(\xi^{1/2})$.

The basic idea on how to approximate eigensolutions of perturbed nearly defective matrices \tilde{A} is here borrowed from the theory of elastic stability by Koiter [14]. Accordingly, the unmodified nearly defective system \hat{A} is viewed as a perfect (tuned) system A_0 affected by small imperfections causing the mistuning, controlled by a parameter ξ . When a second control parameter η acts on the imperfect system (the modification parameter here, the load parameter in elastic stability), the solution is sought as a ξ -perturbation of the η -response of the perfect system, which itself is obtained by a perturbation method. However, Koiter's problem is a direct problem, since the perfect system A_0 is known; on the contrary, since only the imperfect system \hat{A} is given here, a "close" *ideal* perfect system has to be found by solving an inverse problem.

If the previous example is considered again, a tuned system A_0 close to \hat{A} can easily be found by posing $\xi = 0$ in $\hat{A}(\xi)$. The matrix $A_0 = \hat{A}(0)$ is a Jordan block admitting the double eigenvalue $\lambda_0 = 1$ and the unique proper eigenvector $u_0 = \{1, 0\}^T$. If A_0 is perturbed only by η (perturbed perfect system) the eigenvalues $\tilde{\lambda}_{1,2}(0, \eta) = 1 \pm \eta^{1/2} + O(\eta^{3/2})$ will be found. However, since ξ -perturbations are also present (perturbed imperfect system) the two

parameters must be varied simultaneously. If a curve $\xi = \xi(\zeta)$, $\eta = \eta(\zeta)$ is selected on the (ξ, η) -plane, the problem is conveniently converted into a one-parameter perturbation problem; by choosing the straight line $\xi = a\zeta$, $\eta = b\zeta$ and expanding $\tilde{\lambda}_{1,2}(\xi(\zeta), \eta(\zeta))$ around $\zeta = 0$, it follows that

$$\tilde{\lambda}_{1,2}(\xi, \eta) = 1 + [\zeta(a + b)]^{1/2} + O(\zeta^{3/2}) = 1 + (\xi + \eta)^{1/2} + O(\xi^{3/2}, \eta^{3/2}). \quad (4)$$

This expansion is uniformly valid. It can be considered to be a ξ -perturbation of $\tilde{\lambda}_{1,2}(0, \eta)$, to which it tends when $\eta \gg \xi$.

In this paper an algorithm for building up a suitable tuned system is developed for general systems in which the eigensolutions are nearly coincident in twos; however, the method can easily be extended to handle more general cases. After the ideal system is built up, a perturbation procedure similar to that utilized in reference [11] is followed, where, in addition, the mistuning is taken into account.

A simple two-dimensional system is considered first, then the mechanical two-d.o.f. (four-dimensional) system studied in reference [12] is analyzed.

2. PERTURBATIONS OF GENERAL NEARLY DEFECTIVE SYSTEMS

2.1. DEFECTIVE SYSTEMS

Consider an $N \times N$ real matrix $A = A(p)$, depending on vector p of M non-dimensional real parameters p_α ($\alpha = 1, 2, \dots, M$). Suppose that in the M -dimensional space Π of the parameters p_α , a regular surface \mathcal{S} having the following properties exists (see Figure 1). At any point $P \in \mathcal{S}$ there corresponds a matrix A having a multiple eigenvalue λ with algebraic multiplicity $m > 1$ and geometric multiplicity $n = 1$ (the general case $n < m$ dealt with in reference [11] will not be considered here); u is the unique right eigenvector and v is the unique left eigenvector ($A^H v = \bar{\lambda} v$) associated with λ . Therefore surface \mathcal{S} represents a multi-parameter family of defective systems in the space Π .

Now fix a point P_0 on \mathcal{S} and denote by $A_0 = A(p_0)$ the corresponding matrix, having the multiple eigenvalue λ_0 and (unique) associated eigenvectors u_0 and v_0 . It is well known that m generalized right and left eigenvectors, x_i and y_i , respectively, can be associated with the defective eigenvalue λ_0 . They are determined by the recurrence formulas

$$(A_0 - \lambda_0 I)x_i = x_{i-1}, \quad (A_0 - \lambda_0 I)^H y_{i-1} = y_i, \quad i = 2, 3, \dots, m, \quad (5)$$

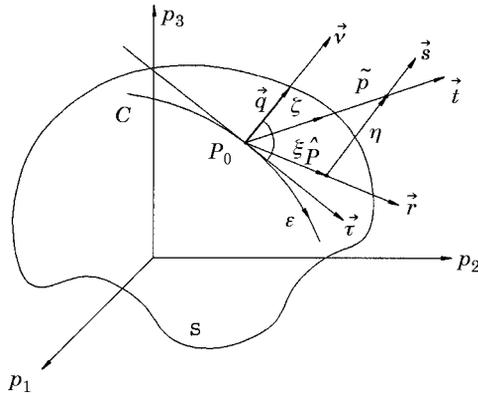


Figure 1. A multi-parameter family of defective systems and its perturbations in the parameter space.

where $x_1 \equiv u_0$, $y_m \equiv v_0$; i is called the index (or the order) of the eigenvector. The generalized eigenvectors are found from equations (5) to within arbitrary constants a_i and b_i , since $x_i + a_i u_0$ and $y_i + b_i v_0$ are also solutions of the same equations. Constants a_i can be chosen by imposing the normalization conditions $e_h^T x_1 = 1$, $e_h^T x_j = 0$ ($j = 2, 3, \dots, m$) ($e_h = h$ th N -dimensional canonical vector): i.e., by requiring that only the proper eigenvector x_1 has a non-vanishing h th (properly selected) component. Constants b_i can be determined by enforcing the bi-orthogonality conditions $y_i^H x_j = \delta_{ij}$, some conditions being automatically verified as a consequence of equations (5).

2.2. NEARLY DEFECTIVE SYSTEMS

By perturbing the parameters p_x around p_{x0} in the direction $\tilde{r} = r_x \tilde{e}_x$ (sum understood, $\tilde{e}_x = \alpha$ th M -dimensional canonical vector) (see Figure 1) it follows that $\hat{p}_x(\xi) = p_{x0} + \xi r_x$, $\xi = \pm \|P_0 \hat{P}\| \ll 1$ being the perturbation parameter. Correspondingly, $\hat{A}(\xi) = A(\hat{p}(\xi))$ is expanded in a series of powers of ξ ,

$$\hat{A}(\xi) = A_0 + \xi A_\xi + \frac{1}{2} \xi^2 A_{\xi\xi} + \dots, \quad (6)$$

where

$$A_\xi = (\partial A_0 / \partial p_x) r_x, \quad A_{\xi\xi} = (\partial^2 A_0 / \partial p_x \partial p_\beta) r_x r_\beta. \quad (7)$$

The unknown eigensolutions $\hat{\lambda}_i(\xi)$, $\hat{u}_i(\xi)$ ($i = 1, 2, \dots, N$) of $\hat{A}(\xi)$ can be determined through a perturbation procedure by assuming that they can be generated from the eigensolutions $\hat{\lambda}_i(0)$, $\hat{u}_i(0)$ of the non-perturbed matrix A_0 . However, while a standard procedure based on series expansions of integer powers of ξ can be used for non-defective eigenvalues, series expansions of fractional powers of ξ must be employed for defective eigenvalues (see the introductory example and references [1] and [11]). By limiting the attention to the m eigenvalues generated by the defective eigenvalue λ_0 , the following expansions are performed:

$$\begin{aligned} \hat{\lambda}_k(\xi) &= \lambda_0 + \xi^{1/m} \dot{\lambda}_{0k} + \frac{1}{2} \xi^{2/m} \ddot{\lambda}_{0k} + \dots, \\ \hat{u}_k(\xi) &= u_0 + \xi^{1/m} \dot{u}_{0k} + \frac{1}{2} \xi^{2/m} \ddot{u}_{0k} + \dots, \quad k = 1, 2, \dots, m. \end{aligned} \quad (8)$$

Here the dot denotes differentiation with respect to $\xi^{1/m}$. Moreover, to make the eigenvectors \hat{u}_k unique, the normalization conditions $e_h^T \hat{u}_k = 1$ ($k = 1, 2, \dots, m$) are enforced for any ξ , this entailing $e_h^T \dot{u}_{0k} = e_h^T \ddot{u}_{0k} = \dots = 0$.

The normalized coefficients of the series expansions (8) can be evaluated by solving the relevant perturbation equations and accounting for equations (5). It is found [11] that

$$\begin{aligned} \dot{\lambda}_{0k} &= (y_m^H A_\xi x_1)^{1/m}, & \ddot{\lambda}_{0k} &= 2(y_m^H A_\xi x_2 - y_m^H u_*) / (m \dot{\lambda}_{0k}^{m-2}), \\ \dot{u}_{0k} &= \dot{\lambda}_{0k} x_2, & \ddot{u}_{0k} &= \begin{cases} \dot{\lambda}_{0k} x_2 + 2 \dot{\lambda}_{0k}^2 x_3 & \text{if } m > 2 \\ \dot{\lambda}_{0k} x_2 + 2 u_* & \text{if } m = 2 \end{cases}, \end{aligned} \quad (9)$$

where u_* is the (unique) solution of the non-homogeneous problem

$$(A_0 - \lambda_0 I) u_* = \dot{\lambda}_{0k} x_m - A_\xi x_1, \quad e_h^T u_* = 0. \quad (10)$$

Index k in equations (9) and (10) refers to one of the m complex roots furnished by equation (9a); u_* does not depend on k .

Equations (8) and (9) show that a nearly defective system has nearly coincident eigenvalues $\hat{\lambda}_k$ and nearly parallel eigenvectors \hat{u}_k , since $\hat{\lambda}_k - \lambda_0 = O(\xi^{1/m})$, $\hat{u}_k - u_0 = O(\xi^{1/m})$ for any k . The small quantity $\Delta = O(\xi^{1/m})$ will be referred to as the *mistuning* of the system. If left eigenvectors \hat{v}_k are also of interest, they can be evaluated in the same way; it is found that

$\hat{v}_k - v_0 = O(\xi^{1/m})$ and $\hat{v}_k^H \hat{u}_k = O(\xi^{1-1/m})$: i.e., left eigenvectors are clustered around v_0 and are therefore nearly orthogonal to the corresponding right eigenvectors, clustered around u_0 . Modal matrices $\hat{U} = [\hat{u}_i]$ and $\hat{V} = [\hat{v}_i] = \hat{U}^{-H}$ ($i = 1, 2, \dots, N$) are therefore ill-conditioned.

2.3. SINGULAR PERTURBATIONS

If $\hat{\lambda}_{0k} = 0$ the asymptotic expansions (8) are not valid. It is possible to show that this critical case occurs when the direction \hat{r} of the perturbation is tangent to \mathcal{S} at P_0 .

To prove this property it is convenient first to re-write $\hat{\lambda}_{0k}^m \equiv \hat{\lambda}_0^m$ as a scalar product, namely $\hat{\lambda}_0^m = \hat{q} \cdot \hat{r}$, where the vector $\hat{q} = v_0^H (\partial A_0 / \partial p_x) u_0 \hat{e}_x$ has been defined and equations (7a) and (9a) have been used. Then, to find the direction of \hat{q} , one can proceed as follows.

Consider an arbitrary regular curve $C \in \mathcal{S}$ for P_0 , having parametric equations $p_x = p_x(\epsilon)$, with $p_x(0) = p_{x0}$ (see Figure 1). Along the curve C , $A = A(\epsilon)$, $u = u(\epsilon)$, $v = v(\epsilon)$, with $A(0) = A_0$, $u(0) = u_0$ and $v(0) = v_0$. As $A(\epsilon)$ is defective for any ϵ , it ensues that $v^H(\epsilon)u(\epsilon) = 0$ or, from the eigenvalue problem, $v^H(\epsilon)A(\epsilon)u(\epsilon) = 0$. By differentiating the two identities with respect to ϵ , and evaluating them at $\epsilon = 0$, it follows that

$$v_0^H u_0 + v_0^H \dot{u}_0 = 0, \quad v_0^H A_0 u_0 + v_0^H A_0 \dot{u}_0 + v_0^H \dot{A}_0 u_0 = 0. \quad (11)$$

By virtue of equation (11a) and the eigenvalue problem, the sum of the first two terms in equations (11b) vanish and therefore $v_0^H \dot{A}_0 u_0 = 0$. Since \dot{A}_0 is proportional to $(\partial A_0 / \partial p_x) \tau_x$, where τ_x are the components of the unit vector \hat{r} tangent to C at P_0 , from the previous result it ensues that $\hat{q} \cdot \hat{r} = 0$; so, as C is arbitrary, \hat{q} is orthogonal to \mathcal{S} . Therefore, if the perturbation is tangent to \mathcal{S} , $\hat{\lambda}_{0k} = 0$, and if the perturbation is normal to \mathcal{S} , $\hat{\lambda}_{0k} = \|\hat{q}\|^{1/m} = \max$.

Tangent perturbations ($\hat{r} \equiv \hat{v}$) will be referred to as *singular perturbations*. When perturbations of the matrix A_0 are singular, the perturbations of the eigensolutions are of *order smaller than* $\xi^{1/m}$; if $m = 2$, the latter are of order ξ : i.e., of the same order as the changes of the parameters. In the geometric theory of reference [13] such eigenvalue behaviour occurs near a degenerate coalescence point on the complex frequency plane.

2.4. SENSITIVITIES OF NEARLY DEFECTIVE SYSTEMS

If sensitivities of the eigensolutions $\hat{\lambda}_k, \hat{u}_k$ of a given nearly defective system $\hat{A}(\xi)$ have to be determined, parameters p_x must be perturbed around $\hat{p}_x(\xi)$ (see Figure 1). A direction $\hat{s} = s_x \hat{e}_x$ is chosen and an abscissa $\eta = \pm \|\hat{P}\hat{P}\| \ll 1$ is introduced; so $\hat{p}_x(\eta; \xi) = \hat{p}_x(\xi) + \eta s_x$ holds along \hat{s} , ξ being a parameter. By expanding $\hat{A} = A(\hat{p}(\eta; \xi))$ and its eigensolutions in series of *integer powers of η and keeping ξ fixed*, it follows that

$$\begin{aligned} \tilde{A}(\eta; \xi) &= \hat{A} + \eta \hat{A}_\eta + \frac{1}{2} \eta^2 \hat{A}_{\eta\eta} + \dots, & \tilde{\lambda}_k(\eta; \xi) &= \hat{\lambda}_k + \eta \hat{\lambda}'_k + \frac{1}{2} \eta^2 \hat{\lambda}''_k + \dots, \\ \tilde{u}_k(\eta; \xi) &= \hat{u}_k + \eta \hat{u}'_k + \frac{1}{2} \eta^2 \hat{u}''_k + \dots, & k &= 1, 2, \dots, m, \end{aligned} \quad (12)$$

where

$$\hat{A}_\eta = (\partial \hat{A} / \partial p_x) s_x, \quad \hat{A}_{\eta\eta} = (\partial^2 \hat{A} / \partial p_x \partial p_\beta) s_x s_\beta \quad (13)$$

and the dash denotes differentiation with respect to η . It should be noted that expansions (12b, c) hold for any $k \in [1, N]$ since \hat{A} is non-defective; however, attention will be focused here on nearly coincident eigensolutions only ($k \in [1, m]$). Equations (12b, c) will be referred to as standard perturbation expansions (SPE's).

The following eigenvalues sensitivities are obtained:

$$\hat{\lambda}'_k = \frac{\hat{v}_k^H \hat{A}_\eta \hat{u}_k}{\hat{v}_k^H \hat{u}_k}, \quad \hat{u}'_k = \sum_{\substack{j=1 \\ j \neq k}}^N \frac{1}{\hat{\lambda}_k - \hat{\lambda}_j} \frac{\hat{v}_j^H \hat{A}_\eta \hat{u}_k}{\hat{v}_j^H \hat{u}_j} \hat{u}_j + a_k \hat{u}_k,$$

$$\hat{\lambda}''_k = \frac{\hat{v}_k^H \hat{A}_{\eta\eta} \hat{u}_k}{\hat{v}_k^H \hat{u}_k} + \frac{2}{\hat{v}_k^H \hat{u}_k} \sum_{\substack{j=1 \\ j \neq k}}^N \frac{1}{\hat{\lambda}_k - \hat{\lambda}_j} \frac{\hat{v}_j^H \hat{A}_\eta \hat{u}_k \hat{v}_k^H \hat{A}_\eta \hat{u}_j}{\hat{v}_j^H \hat{u}_j}, \quad k = 1, 2, \dots, m. \quad (14)$$

Here a_k is an arbitrary constant to be determined by the normalization conditions and \hat{u}'_k has been expanded in series of the eigenvectors \hat{u}_j . Since $\hat{\lambda}_k - \hat{\lambda}_j = O(\xi^{1/m})$ and $\hat{v}_k^H \hat{u}_k = O(\xi^{1-1/m})$ for k and $j \in [1, m]$, it ensues that $\tilde{\lambda}_k - \hat{\lambda}_k = O(\eta/\xi^{1-1/m})$ and $\tilde{u}_k - \hat{u}_k = O(\eta/\xi)$; therefore the SPE's are not uniformly valid when $\eta \geq O(\xi^{1-1/m})$ and $\eta \geq O(\xi)$, respectively.

Similar results have been obtained in reference [13] by analyzing series convergence instead of uniform validity. It is shown that a coalescence on the complex frequency plane maps into a branch point in the parameter space; therefore a power series expansion around a close regular point (i.e., around a nearly defective system) has a small radius of convergence, less than its distance from the singular point.

To obtain asymptotic expansions valid in a larger interval of η , the perturbation procedure is modified as follows. The eigensolutions $\tilde{\lambda}_k$ and \tilde{u}_k are expanded *in series of the two small parameters* ξ and η around $\xi = \eta = 0$; i.e., around the eigensolutions of the defective system A_0 . The expansions are performed along the straight line $\vec{t} = t_x \vec{e}_x$ on which the abscissa $\zeta = \pm \|P_0 \vec{P}\| \ll 1$ is introduced, so that $\zeta \vec{r} + \eta \vec{s} = \zeta \vec{t}$ (see Figure 1). By expanding $\tilde{A}(p(\zeta))$ it follows that

$$\tilde{A}(\zeta) = A_0 + \zeta A_\zeta + \frac{1}{2} \zeta^2 A_{\zeta\zeta} + \dots, \quad (15)$$

where

$$A_\zeta = (\partial A_0 / \partial p_x) t_x, \quad A_{\zeta\zeta} = (\partial^2 A_0 / \partial p_x \partial p_\beta) t_x t_\beta. \quad (16)$$

Since A_0 is defective, $\tilde{\lambda}_k(\zeta)$ and $\tilde{u}_k(\zeta)$ have to be expanded in series of $\zeta^{1/m}$. So, expressions similar to equations (8) and (9) hold, by replacing ξ by ζ . By taking into account that $\zeta A_\zeta = \zeta A_\xi + \eta A_\eta$, where $A_\eta = (\partial A_0 / \partial p_x) s_x$, the dependence on the two parameters ξ and η can be made explicit. The following expressions are thus obtained:

$$\tilde{\lambda}_k(\xi, \eta) = \lambda_0 + \delta_1 \lambda_k + \frac{1}{2} \delta_2 \lambda_k + \dots, \quad \tilde{u}_k(\xi, \eta) = u_0 + \delta_1 u_k + \frac{1}{2} \delta_2 u_k + \dots. \quad (17)$$

Here

$$\delta_1 \lambda_k = [y_m^H (\zeta A_\xi + \eta A_\eta) x_1]^{1/m}, \quad \delta_2 \lambda_k = 2[y_m^H (\zeta A_\xi + \eta A_\eta) x_2 - y_m^H u_*] / (m \delta_1 \lambda_k^{m-2}),$$

$$\delta_1 u_k = \delta_1 \lambda_k x_2, \quad \delta_2 u_k = \begin{cases} \delta_2 \lambda_k x_2 + 2\delta_1 \lambda_k^2 x_3 & \text{if } m > 2 \\ \delta_2 \lambda_k x_2 + 2u_* & \text{if } m = 2 \end{cases}, \quad (18)$$

in which u_* is determined by

$$(A_0 - \lambda I) u_* = \delta_1 \lambda_k^m x_m - (\zeta A_\xi + \eta A_\eta) x_1, \quad e_n^T u_* = 0. \quad (19)$$

Equations (17) will be referred to as modified perturbation expansions (MPE's). It should be noted that they are not valid if the total perturbation $\zeta \vec{t}$ is singular: i.e., if $\delta_1 \lambda_k = 0$.

3. THE INVERSE PROBLEM

Practical problems can occur in the following form: a nearly defective system represented by a point \hat{P} in the parameters space Π is given and sensitivities of some nearly coincident eigenvalues and eigenvectors in the \vec{s} direction have to be determined. To obtain MPE's a *tuned* defective system P_0 in the neighborhood of \hat{P} must be selected as the starting point. However, in general systems points P_0 are not known and can be difficult to determine. Moreover, defective systems could not exist in Π , or at least only for meaningless values of the physical parameters; e.g., negative values of essentially positive quantities. So it appears convenient in any case to construct defective systems artfully.

The crucial task of how to build an ideal tuned system "close" to a real mistuned system constitutes an inverse problem. It is dealt with here under the simplifying assumption that only couples of nearly coincident eigenvalues occur (i.e., $m \leq 2$); a brief outline of how to handle more general cases is given in the Appendix.

In principle, the choice of the tuned system P_0 is arbitrary, but it should be expected that the approximation improves as P_0 becomes closer to \hat{P} . For this reason a good choice seems to be to search for an unknown tuned system P_0 that is transformed into the given mistuned system \hat{P} , *after non-singular perturbation*. The easiest way to accomplish this is to extend the M -dimensional space $\Pi = \{p_x\}$ to an $(M + l)$ -dimensional space $\Pi^+ = \{p_x, \xi_j\}$ by introducing suitable new parameters ξ_j ($j = 1, 2, \dots, l$) and to search for a defective system in the subspace $\hat{\Pi}^+ = \{\hat{p}_x, \xi_j\}$ of Π^+ : i.e., *leaving unchanged the values of the M physical parameters p_x* . In other words, a perturbation matrix $-\delta A(\hat{p}_x, \xi_j(\hat{p}_x))$ is added to $\hat{A}(\hat{p}_x)$ so that a defective matrix $A_0(\hat{p}_x, \xi_j(\hat{p}_x))$ is obtained.

An example for $N = 2$, $M = 1$ and $l = 1$ is shown in Figure 2. In the space Π (the p_1 -axis), an isolated unknown defective system exists at the origin O , the distance of which from the given point $\hat{P} = (\hat{p}_1)$ is of the order of the mistuning $\Delta = \hat{\lambda}_1 - \hat{\lambda}_2$ (i.e., the p_1 -perturbations are singular). By introducing a suitably selected new parameter ξ_1 , a one-parameter family of defective systems can be built up in the two-dimensional space Π^+ . By choosing $P_0 = (\hat{p}_1, \xi_1(\hat{p}_1))$, a tuned system close to \hat{P} is obtained, the distance of which from \hat{P} is of order Δ^2 . Thus, in this case, extrapolating from P_0 (ideal defective system) appears to be more convenient than extrapolating from O (real defective system).

By coming back to the general case, a matrix \hat{A} with eigensolutions $\hat{\lambda}_k$, \hat{u}_k and \hat{v}_k ($k = 1, 2, \dots, N$) is known, with $\hat{v}_i^H \hat{u}_j = \delta_{ij}$. Two cases are considered: (a) there is a unique couple of nearly coincident eigenvalues (with associated nearly parallel eigenvectors),

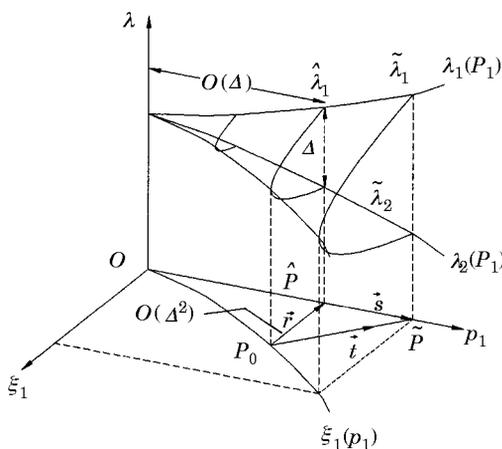


Figure 2. The ideal defective system P_0 in the extended parameters space.

the remaining eigenvalues being well separated; (b) there are several couples of nearly coincident eigenvalues (each associated with nearly parallel eigenvectors) well separated among themselves and from the remaining eigenvalues. While sensitivities of separated eigensolutions can be determined by computing SPE's, sensitivities of nearly coincident eigensolutions must be evaluated by MPE's. To obtain them, and unknown defective matrix A_0 must be determined, so that $\|\delta A\| = \|\hat{A} - A_0\|$ is small with respect to $\|\hat{A}\|$.

3.1. SINGLE COUPLE OF NEARLY COINCIDENT EIGENVALUES

Let $\hat{\lambda}_1$ and $\hat{\lambda}_2$ be the (real) nearly coincident eigenvalues, with $\hat{\lambda}_1 - \hat{\lambda}_2 = O(\xi^{1/2})$, ξ being a small parameter. The space $\Pi = \{p_x\}$ is extended by considering ξ as the $(M+1)$ th (real) parameter. In the extended space $\Pi^+ = \{p_x, \xi\}$ a defective matrix A_0 is assumed to exist having the spectral representation $A_0 = XJY^H$, where

$$J = \left[\begin{array}{c|ccc} \lambda_0 & 1 & & \\ & \lambda_0 & & \\ \hline & & \lambda_{03} & \\ & & & \ddots \\ & & & & \lambda_{0N} \end{array} \right] \quad (20)$$

contains a Jordan block with a double eigenvalue λ_0 and $X = [x_k]$ and $Y = [y_k] = X^{-H}$ are the right and left eigenvector matrices, respectively. Only x_2 and y_1 are generalized (index two) eigenvectors, the remainder being proper eigenvectors. (The change of notation with respect to the previously defined eigenvectors (equations (5)), all associated with λ_0 , should be noted.)

The perturbation matrix is written as $\delta A = \xi A_\xi$ and $A_\xi = [a_{ij}]$ is represented as an N^2 -term dyad: i.e., $A_\xi = a_{ij}x_i y_j^H$ (sum understood). If δA has to be a non-singular perturbation of A_0 , from equations (9a) $y_2^H A_\xi x_1 \neq 0$ must hold: i.e., $a_{21} \neq 0$. The simplest choice is to assume that $a_{ij} = \delta_{i2}\delta_{j1}$: i.e.,

$$A_\xi = x_2 y_1^H. \quad (21)$$

In other words, matrix A_0 is perturbed by replacing the zero (2, 1) coefficient of J by ξ .

The perturbed matrix has the spectral representation $A_0 + \xi A_\xi = \hat{U}_0 \hat{A}_0 \hat{V}_0^H$, where

$$\begin{aligned} \hat{U}_0 &= [x_1 + \xi^{1/2}x_2, x_1 - \xi^{1/2}x_2, x_3, \dots, x_N], \\ \hat{V}_0 &= [(y_1 + \xi^{-1/2}y_2)/2, (y_1 - \xi^{-1/2}y_2)/2, y_3, \dots, y_N], \\ \hat{A}_0 &= \text{diag}(\lambda_0 + \xi^{1/2}, \lambda_0 - \xi^{1/2}, \lambda_{03}, \dots, \lambda_{0N}). \end{aligned} \quad (22)$$

It should be noted incidentally that the first two (normalized) left eigenvectors tend to infinity when $\xi \rightarrow 0$, because they are nearly orthogonal to the corresponding right eigenvectors.

The spectral representation of the known matrix is $\hat{A} = \hat{U}\hat{A}\hat{V}^H$, where $\hat{U} = [\hat{u}_k]$, $\hat{V} = [\hat{v}_k]$ and $\hat{A} = \text{diag}(\hat{\lambda}_k)$. By equating the two matrices, i.e., by requiring $\hat{U}_0 = \hat{U}$, $\hat{V}_0 = \hat{V}$ and $\hat{A}_0 = \hat{A}$, and solving with respect to the unknown quantities, it is found that

$$\begin{aligned} \xi^{1/2} &= \frac{1}{2}(\hat{\lambda}_1 - \hat{\lambda}_2), & \lambda_0 &= \frac{1}{2}(\hat{\lambda}_1 + \hat{\lambda}_2), & x_1 &= \frac{1}{2}(\hat{u}_1 + \hat{u}_2), & x_2 &= \frac{1}{2}\xi^{-1/2}(\hat{u}_1 - \hat{u}_2), \\ & & & & y_1 &= \hat{v}_1 + \hat{v}_2, & y_2 &= \xi^{1/2}(\hat{v}_1 - \hat{v}_2), \end{aligned} \quad (23)$$

together with $\lambda_k = \hat{\lambda}_k$, $x_k = \hat{u}_k$ and $y_k = \hat{v}_k$ for $k > 2$.

It is worth noting that perturbations (21) couple only the first two eigensolutions of A_0 , while they leave the other eigensolutions unaltered. In particular, ξ , λ_0 , x_i and y_i ($i = 1, 2$) depend only on $\hat{\lambda}_i$, \hat{u}_i and \hat{v}_i . Therefore, if only the sensitivities of the two nearly coincident

eigensolutions are of interest, then *the remaining eigensolutions of \hat{A} do not have to be evaluated.*

In conclusion, the following algorithm can be applied.

(1) From the eigenvalue problems $(\hat{A} - \hat{\lambda}I)\hat{u} = 0$ and $(\hat{A} - \hat{\lambda}I)^H\hat{v} = 0$, $\hat{\lambda}_i$, \hat{u}_i and \hat{v}_i ($i = 1, 2$) are evaluated; right eigenvectors \hat{u}_i are normalized according to $e_h^T\hat{u}_i = 1$ and left eigenvectors to $\hat{v}_i^H\hat{u}_i = \delta_{ij}$.

(2) Equations (23) are employed to calculate ξ , λ_0 , x_i and y_i ($i = 1, 2$) (the normalization condition $e_h^T x_i = 1$ being automatically satisfied).

(3) Matrix A_ξ is computed from equation (21) and matrix A_0 is then obtained as a difference, $A_0 = \hat{A} - \xi x_2 y_1^H$.

(4) For a given modification matrix A_η , the modified eigensolutions $\tilde{\lambda}_i$ and \tilde{u}_i are calculated from equations (17)–(19) (with $m = 2$) as functions of a parameter η , ξ being fixed. Namely:

$$\tilde{\lambda}_i(\xi, \eta) = \lambda_0 \pm (\xi + \eta y_2^H A_\eta x_1)^{1/2} + \frac{1}{2} \eta (y_2^H A_\eta x_2 - y_2^H u_*),$$

$$\tilde{u}_i(\xi, \eta) = u_0 \pm (\xi + \eta y_2^H A_\eta x_1)^{1/2} x_2 + \eta [\frac{1}{2} (y_2^H A_\eta x_2 - y_2^H u_*) x_2 + u_*], \quad i = 1, 2, \quad (24)$$

where u_* is the solution of

$$(A_0 - \lambda I)u_* = (y_2^H A_\eta x_1)x_2 - A_\eta x_1, \quad e_h^T u_* = 0. \quad (25)$$

Equations (24) and (25) are simpler than general equations (17)–(19), since *the squared mistuning ξ appears only at the first order*; this is due to the particularly simple form (21) of A_ξ . MPE's performed by using points $P_0 \in \Pi$ as starting points do not generally have this property. There are two consequences as a result of this: (a) when $\eta \rightarrow 0$ second order MPE's furnish the exact solution; (b) the vector u_* can be made independent of η , so it can be calculated once and for all. The last circumstance ensures the effectiveness of the method; if otherwise, it would not be computationally convenient.

3.2. SEVERAL COUPLES OF NEARLY COINCIDENT EIGENVALUES

Let $\hat{\lambda}_1, \hat{\lambda}_2, \dots, \hat{\lambda}_{2l}$ be $2l$ (generally complex) eigenvalues, nearly coincident in twos, with $\hat{\lambda}_1 - \hat{\lambda}_2 = O(\xi_1^{1/2})$, $\hat{\lambda}_3 - \hat{\lambda}_4 = O(\xi_2^{1/2})$, \dots , $\hat{\lambda}_{2l-1} - \hat{\lambda}_{2l} = O(\xi_l^{1/2})$, where $\xi_1, \xi_2, \dots, \xi_l$ are small parameters. The space Π is extended by considering the ξ_j 's as additional (generally complex) parameters. In the $(M + l)$ -dimensional space Π^+ a defective matrix A_0 is sought. Its Jordan canonical form contains l blocks having double eigenvalues $\lambda_{01}, \lambda_{03}, \dots, \lambda_{0,2l-1}$, so that $x_1, x_3, \dots, x_{2l-1}, x_k$ ($k > 2l$) are proper eigenvectors and x_2, x_4, \dots, x_{2l} are generalized (index two) right eigenvectors. Similarly, $y_2, y_4, \dots, y_{2l}, y_k$ ($k > 2l$) are proper left eigenvectors and $y_1, y_3, \dots, y_{2l-1}$ are generalized left eigenvectors.

The following perturbation matrix δA is chosen:

$$\delta A = \xi_1 A_{\xi_1} + \xi_2 A_{\xi_2} + \dots + \xi_l A_{\xi_l} = \xi_1 x_2 y_1^H + \xi_2 x_4 y_3^H + \dots + \xi_l x_{2l} y_{2l-1}^H. \quad (26)$$

Accordingly, the l Jordan blocks are perturbed by posing the $(2, 1)$ coefficients equal to ξ_j ($j = 1, 2, \dots, l$). As previously noted, such a perturbation couples only the eigenvectors of each block, not the eigenvectors of different blocks. Therefore, by proceeding as in the previous case, formulas similar to equations (23) are derived,

$$\begin{aligned} \xi_j^{1/2} &= \frac{1}{2} (\hat{\lambda}_{2j-1} - \hat{\lambda}_{2j}), & \lambda_{0,2j-1} &= \frac{1}{2} (\hat{\lambda}_{2j-1} + \hat{\lambda}_{2j}), & x_{2j-1} &= \frac{1}{2} (\hat{u}_{2j-1} + \hat{u}_{2j}), \\ x_{2j} &= \frac{1}{2} \xi_j^{-1/2} (\hat{u}_{2j-1} - \hat{u}_{2j}), & y_{2j-1} &= \hat{v}_{2j-1} + \hat{v}_{2j}, & y_{2j} &= \xi_j^{1/2} (\hat{v}_{2j-1} - \hat{v}_{2j}), \end{aligned} \quad (27)$$

whereas $\lambda_{0k} = \hat{\lambda}_k$, $x_k = \hat{u}_k$ and $y_k = \hat{v}_k$ ($k > 2l$) are still obtained.

By referring to the j th couple of nearly coincident eigensolutions, modified eigensolutions $\tilde{\lambda}_i$ and \tilde{u}_i ($i = 2j - 1, 2j$) can be obtained by equations (17)–(19) by replacing ξA_ξ by $\delta A = \sum_{j=1}^l \xi_j A_{\xi_j}$ and reading x_{2j-1}, x_j, y_{2j-1} and y_{2j} instead of x_1, x_2, y_1 and y_2 .

However, due to the choice (26) of δA and the bi-orthogonality conditions among the generalized eigenvectors, only the perturbation $\xi_j A_{\xi_j}$ gives non-vanishing contributions to $\tilde{\lambda}_i$ and \tilde{u}_i . In conclusion, *the algorithm valid for a single couple of nearly coincident eigenvalues is still valid for several couples*, provided that the couples are well separated. So the analysis can be performed singularly for each couple by applying equations (24) and (25) and ignoring the other couples. However, if second order sensitivities $\delta_2 \lambda_i$ and $\delta_2 u_i$ have to be evaluated, matrix $A_0 = \hat{A} - \sum_{j=1}^l \xi_j A_{\xi_j}$ must be evaluated to find u_* , thus entailing the necessity to calculate all the right and left eigenvectors associated with the l couples of eigenvalues.

It should be noted from equations (27) that the parameters ξ_j and the eigenvectors of A_0 associated with complex conjugate eigenvalues of \hat{A} themselves are complex conjugate, so that, from equation (26), δA is real, and therefore A_0 is also real.

An important particular case occurs when $l = 2$ and the two couples of eigenvalues are complex conjugate. Then $\xi_1 \equiv \xi$, $\xi_2 \equiv \bar{\xi}$ and equation (26) reads

$$\delta A = 2 \operatorname{Re} [\xi x_2 y_1^H]. \quad (28)$$

4. EXAMPLE 1: A TWO DIMENSIONAL SYSTEM

As a first example, consider the free motion $z(t)$ of a damped, single-d.o.f. system, governed by the differential equation $\ddot{z} + 2\delta\dot{z} + \kappa z = 0$. Upon assuming $z = \{\dot{z}, z\}^T$ as the state vector, the dynamical matrix is

$$A = \begin{bmatrix} -2\delta & -\kappa \\ 1 & 0 \end{bmatrix}. \quad (29)$$

The system is two-dimensional ($N = 2$) and depends on two physical parameters ($M = 2$): i.e., $p = \{p_1, p_2\} \equiv \{\delta, \kappa\}^T$. It admits the following eigenvalues λ_k and right and left bi-orthogonal normalized eigenvectors u_k and v_k ($k = 1, 2$):

$$\lambda_{1,2} = -\delta \pm \sqrt{\delta^2 - \kappa}, \quad u_{1,2} = \{\lambda_{1,2}, 1\}^T, \quad v_{1,2} = \{-\lambda_{1,2}, \kappa\}^T / (\kappa - \lambda_{1,2}^2). \quad (30)$$

The eigenvalues $\lambda_{1,2}$ are represented in Figure 3 versus the parameters p_x .

Along the curve C of equation $\kappa = \delta^2$ the system is defective (critically damped). In fact, it has a unique double eigenvalue $\lambda_0 = -\delta$ ($m = 2, n = 1$) and unique right and left eigenvectors, $u_0 = \{-\delta, 1\}^T$ and $v_0 = \{\delta, \kappa\}$ respectively; in addition, $v_0^H u_0 = 0$.

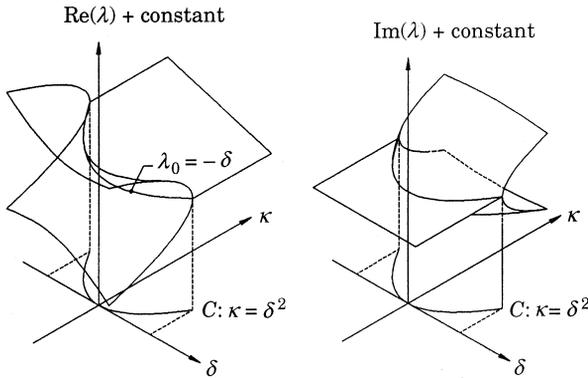


Figure 3. Eigenvalues loci for the system (29).

Upon recalling that $\xi t_\delta = \xi r_\delta + \eta s_\delta$ and $\xi t_\kappa = \xi r_\kappa + \eta s_\kappa$, it follows that

$$\begin{aligned} \tilde{\lambda}_{1,2}(\xi, \eta) = & -\delta_0 \pm [\xi(2\delta_0 r_\delta - r_\kappa) + \eta(2\delta_0 s_\delta - s_\kappa)]^{1/2} - (\xi r_\delta + \eta s_\delta) \\ & \pm (\xi r_\delta + \eta s_\delta)^2 / 2[\xi(2\delta_0 r_\delta - r_\kappa) + \eta(2\delta_0 s_\delta - s_\kappa)]^{1/2}. \end{aligned} \quad (34)$$

The asymptotic expansion (34) is not affected by the drawback of expansions (12b); however, it has a narrow region of non-uniformity around $\vec{t} = \vec{t}$: i.e., for total perturbations $\vec{\zeta} \vec{t}$ of singular type, as occurs for point $P_c \in s$ in Figure 4.

If the algorithm of Section 3 is applied instead, the following results are obtained,

$$\begin{aligned} \xi = \delta^2 - \hat{\kappa}, \quad \lambda_0 = -\delta, \quad X = \begin{bmatrix} -\delta & 1 \\ 1 & 0 \end{bmatrix}, \quad Y = \begin{bmatrix} 0 & 1 \\ 1 & \delta \end{bmatrix}, \\ A_0 = \begin{bmatrix} -2\delta & -\delta^2 \\ 1 & 0 \end{bmatrix}, \quad u_* = 0, \end{aligned} \quad (35)$$

and, from equation (20a), it follows that

$$\tilde{\lambda}_{1,2} = -\delta \pm [\delta^2 - \hat{\kappa} + \eta(2\delta s_\delta - s_\kappa)]^{1/2} - \eta s_\delta. \quad (36)$$

So, in this particular example, it is easy to check that extrapolating from $P_0^+ = (\delta, \hat{\kappa}, \xi)$ in the extended three-dimensional Π^+ space is equivalent to extrapolating from $P_0 = (\delta, \delta^2)$ in the Π space.

Two numerical examples have been worked out to compare exact, SPE's and MPE's. SPE's were truncated to second order (η^2) terms; and MPE's to third order ($\xi^{3/2}$) or second order ($\xi^{2/2}$) terms. A nearly defective system \hat{P} was given and eigenvalues sensitivities in a selected \vec{s} direction were evaluated. The MPE (equation (34)) was built up starting from a point P_0 close to \hat{P} , arbitrarily chosen on curve C .

As a first example, $\hat{P} = (1, 0.9)$ and $s_\delta = -s_\kappa = \sqrt{2}/2$ were considered. By varying η in the interval $[-0.5, 0.5]$, the eigenvalues loci shown in Figure 5 were obtained. The SPE is a very poor approximation of the exact solution; in particular, it furnishes $\text{Im}(\tilde{\lambda}) = 0$ for any η . On the contrary, the third order MPE relative to the starting point $P_0 = (1, 1)$ and

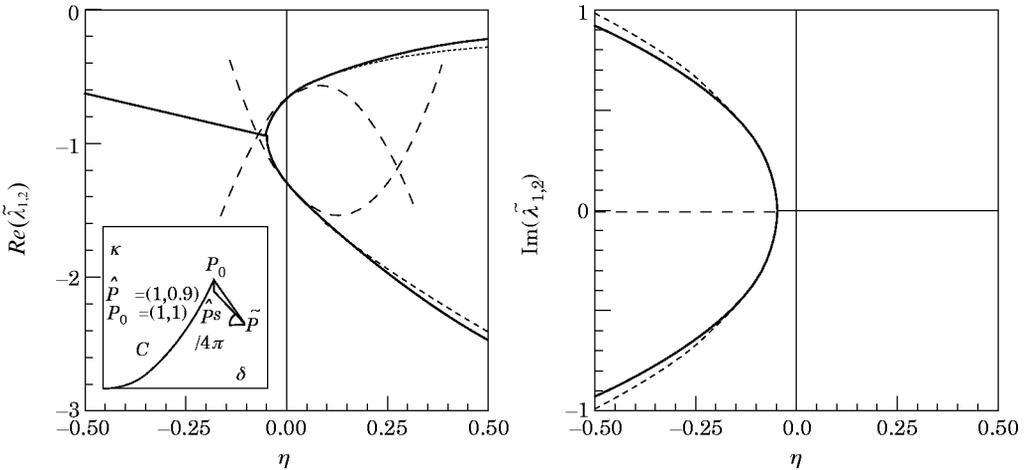


Figure 5. Eigenvalues versus modifications for $\delta = 1$, $\hat{\kappa} = 0.9$ and $s_\delta = -s_\kappa = \sqrt{2}/2$. —, Exact; —, third order MPE; —, SPE; - - -, second order MPE.

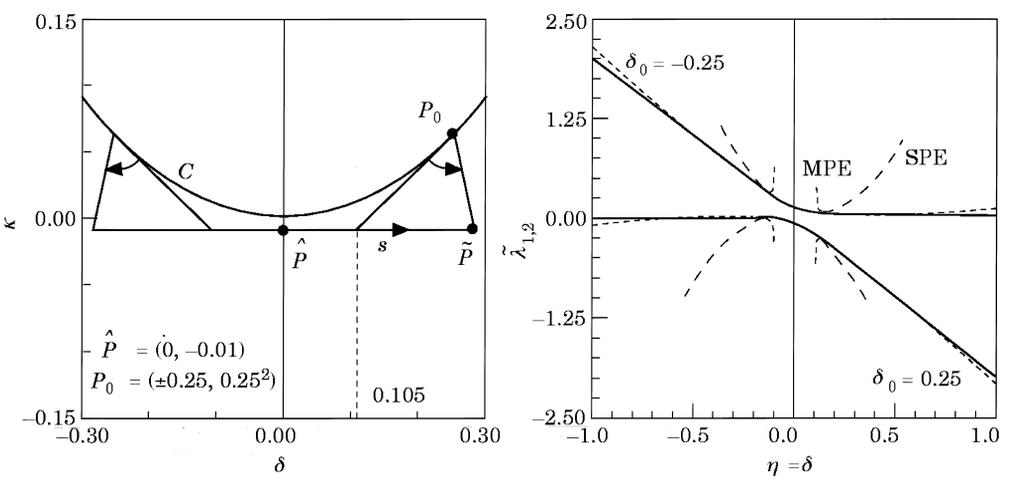


Figure 6. Parameters space and eigenvalues versus modifications for $\delta = 0$, $\hat{\kappa} = -0.01$, $s_\delta = 1$ and $s_\kappa = 0$. —, Exact; --, SPE; ····, third order MPE.

the exact solution are undistinguishable in the plot, although a large interval of η is considered; the second order approximation also furnishes an excellent approximation. In this case the choice of point P_0 does not substantially affect the solution.

As a second example, $\hat{P} = (0, -0.01)$ and $s_\delta = 1$, $s_\kappa = 0$ were considered, so that $\eta \equiv \delta$ (see Figure 6(a)). The eigenvalues $\tilde{\lambda}_k$ are real for any η and are plotted in Figure 6(b). As in the previous case, the SPE rapidly diverges from the exact solution. Two MPE's were computed, starting from two different points of C , namely $P_0 = (\pm 0.25, 0.25^2)$. The two solutions go to $\pm \infty$ when $\eta = \pm 0.105$ (see Figure 6(a)), but furnish good approximations of the exact solution on one side of the asymptotes. This is due to the fact that the parameters are perturbed along a direction $\tilde{s} \equiv \tilde{\delta}$, forming a small angle with the tangents $\tilde{\tau}$ to C at points P_0 near the origin, so they have the character of singular perturbations. In this critical case, therefore, the choice of P_0 appears to be important.

5. EXAMPLE 2: A FOUR-DIMENSIONAL SYSTEM

As a second example consider the two-d.o.f. system studied in reference [12], consisting of two single-d.o.f. oscillators of stiffness k_i and mass m_i ($i = 1, 2$), coupled by a damper of constant c . With the state vector denoted by $z = \{\dot{z}_1, \dot{z}_2, z_1, z_2\}^T$, z_i being the displacement of the oscillator i and \dot{z}_i its velocity, the dynamic matrix of the system is

$$A = \begin{bmatrix} -2\delta & 2\delta & -1 & 0 \\ 2\delta/\mu & -2\delta/\mu & 0 & -\kappa/\mu \\ 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{bmatrix}, \quad (37)$$

where $\mu = m_2/m_1$, $\kappa = k_2/k_1$, and $2\delta = c/\sqrt{k_1 m_1}$ are non-dimensional parameters. The system is therefore four-dimensional ($N = 4$) and the space Π three-dimensional ($M = 3$), since $p = \{\kappa, \mu, \delta\}^T$. It is easy to check that if

$$\mu = (1 \pm \delta)/(1 \mp \delta), \quad \kappa = 1/\mu, \quad (38)$$

matrix A is defective, since it admits two double eigenvalues (complex conjugate if $\delta < \sqrt{2}/2$), each associated with a unique eigenvector ($m = 2$, $n = 1$). Equations (35) define

two curves, C_1 and C_2 , in Π : i.e., two one-parameter families of defective systems (see Figure 7). Due to the symmetry of the system, one family can be obtained from the other simply by exchanging stiffnesses and masses of the oscillators.

Now one can consider a nearly defective system \hat{A} , represented in the space Π by a point $\hat{P} = (\hat{\kappa}, \hat{\mu}, \hat{\delta})$ close to the curve C_1 , and determine its eigensolutions sensitivities in the direction \hat{s} .

A specific numerical case was considered. Let $\hat{P} = (0.851, 1.271, 0.10)$, the eigenvalues of which are $\hat{\lambda}_{1,3} = -0.079 \pm 0.882i$ and $\hat{\lambda}_{2,4} = -0.099 \pm 0.919i$; the mistuning is therefore of the order of 4%. The direction $\hat{s} = \{0.556, -0.831, 0\}$ was chosen, along which $\kappa = \hat{\kappa}(1 + \eta)$, $\mu = \hat{\mu}(1 - \eta)$ and $\delta = \hat{\delta}$.

To apply the modified perturbation method, point \hat{P} could be considered as a perturbation of any point of C_1 close to \hat{P} : e.g., $P_1 = (0.818, 1.222, 0.10)$ (see Figure 7), the double eigenvalue of which is $\lambda = -0.091 \pm 0.900i$. However, one can ignore the existence of the curve C_1 and search for a defective point P_0 in a two-dimensional subspace of the five-dimensional extended space $\Pi^+ = \{\kappa, \mu, \delta, \xi_1, \xi_2\}$; i.e., by fixing $(\kappa, \mu, \delta) = (\hat{\kappa}, \hat{\mu}, \hat{\delta})$ and varying ξ_1 and ξ_2 . By applying the algorithm of Section 3, $\xi_1 = \bar{\xi}_2 = -(2.415 + 3.724i)10^{-4}$ is found, together with A_0 and λ_0 . The relevant second order MPE's (equations (24)) are then compared with the second order SPE's (equations (12b, c)) and the exact (numerical) solutions.

In Figure 8 are shown $\text{Re}(\tilde{\lambda}_{1,2})$ and $\text{Im}(\tilde{\lambda}_{1,2})$ versus the perturbation parameter η . It is apparent that the MPE's are in good agreement with the exact solution for $\eta \in (-0.15, 0.15)$ (i.e., for modifications of the parameters up to 15%), whereas the SPS's furnish very poor approximations, although the mistuning is not too small.

An alternative representation of the same results can be obtained by plotting the eigenvalues paths $\tilde{\lambda}_i(\eta)$ in the complex plane (see Figure 9). Here a larger interval of η is considered; marked points on the curves refer to $\eta = -0.15, 0, 0.15, 0.30$ and 0.45 , respectively, and the arrows indicate the directions of the increasing η 's. When $\eta = 0.15$ the two eigenvalues are well separated; when η increases they first approach each other roughly on a straight line; then, when $\eta \simeq 0$, they veer abruptly and describe a circle in opposite directions; successively, when $\eta \simeq 0.4$, they veer again to come back on to the previous straight line. It is worth noting that the two veerings occur when the modified system \tilde{P} is close to the defective systems P_1 and P_2 (see Figure 7). While the accuracy of the MPE is excellent when $\eta < 0$, due to the presence of the second veering, it is less good when $\eta > 0$; however, compared with the SPE, the solution is markedly improved.

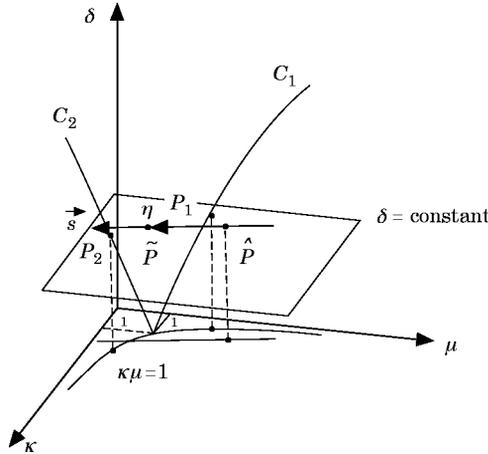


Figure 7. The parameters space for the system (37).

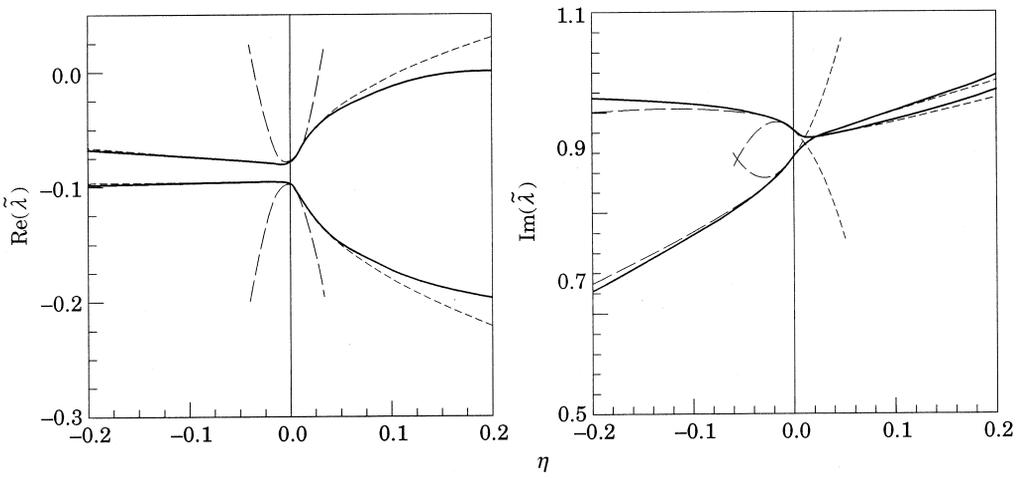


Figure 8. Eigenvalues versus modifications for a two-d.o.f. system. —, Exact; ----, MPE; - · -, SPE.

The eigenvectors $\tilde{u}_1(\eta)$ and $\tilde{u}_2(\eta)$ are represented in Figure 10. Vectors are normalized according to $e_i^T \tilde{u}_i = 1$: i.e., by assuming that the displacement of the second oscillator is equal to one. The paths of the other three components are plotted in the complex plane for the same η 's considered above. It is found that the second component (the velocity of the second oscillator) varies on a much slower scale than that of the first and third components (velocity and displacement of the first oscillator, respectively), although it exhibits a similar behaviour; in addition, it remains about $\pi/2$ out of phase with respect to the associated displacement. On the contrary, the velocity and the displacement of the first oscillator vary rapidly, their phase difference being nearly constant, equal to about $\pi/2$. The paths are straight lines when η is less than zero or larger than (about) 0.4, and are curves closely running around the unit

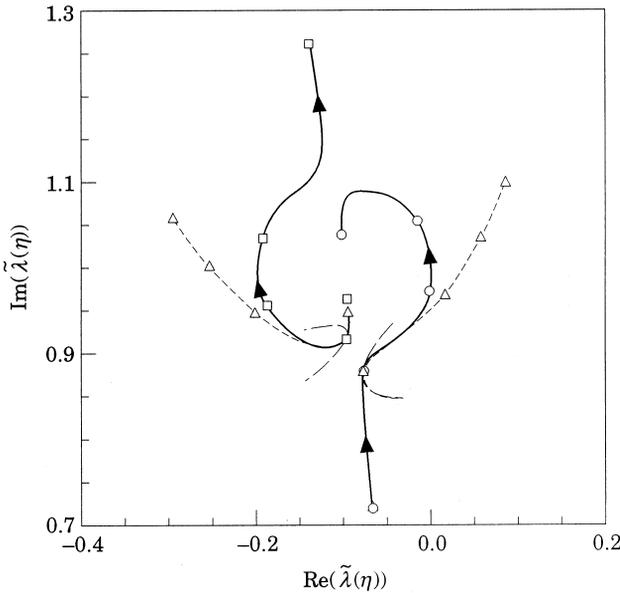


Figure 9. Eigenvalue paths in the complex plane. \square - \square - \square - \square , Exact $\tilde{\lambda}_1$; \circ - \circ - \circ - \circ , exact $\tilde{\lambda}_2$; \triangle - \triangle - \triangle - \triangle , MPE; ----, SPE. $\eta_{min} = -0.15$; $\eta_{max} = 0.45$.

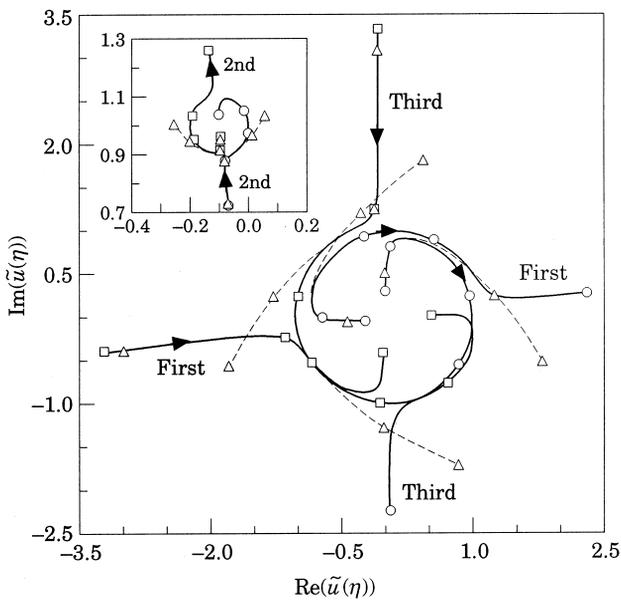


Figure 10. Eigenvector components paths in the complex plane (fourth component equal to one). \square - \square - \square - \square , Exact \tilde{u}_1 ; \circ - \circ - \circ - \circ , exact \tilde{u}_2 ; \triangle - \triangle - \triangle - \triangle , MPE. $\eta_{min} = -0.15$; $\eta_{max} = 0.45$.

circle when η is in the range $(0, 0.4)$; the components of the two eigenvectors go along the circle in opposite directions. When $\eta = 0.198$, i.e., when the two oscillators are equal ($\tilde{\mu} = \tilde{\kappa} = 1$), the two displacements are in phase ($\text{Re}(\tilde{\lambda}) = 0$) or in phase opposition ($\text{Re}(\tilde{\lambda}) = -0.2$) and are of the same magnitude; when η is negative or larger than 0.4 the two displacements are $\pi/2$ out of phase (forward or backward, respectively), but the magnitudes are quite different, since in each mode one component prevails. As for the eigenvalues, the MPE's furnish good approximations of the exact solution for moderate η ; SPE's, not shown, again give poor approximations.

6. REMARKS AND CONCLUSIONS

Three remarks may be made on the method proposed.

(1) The problem treated here has some similarity with localization and loci veering phenomena, already studied in depth (e.g., see the paper by Pierre [15] and reference [13] for helpful comments). In those problems too, the eigenvalues depend on two small parameters: an imperfection (modification) parameter η and a coupling parameter (mistuning) Δ . Pierre also utilized perturbation methods: when the η/Δ ratio was small he assumed η as the perturbation parameter; when the ratio was large, he considered Δ as the perturbation parameter and included η in the unperturbed system to split its eigenvalues. In all cases, series of integer powers were used, since only non-defective (conservative) systems were taken into account. Pierre's method could also be applied to the problem considered here; however, it would require the solution of a new eigenvalue problem, after having solved the unmodified problem, in contrast with the main scope of the sensitivity analysis. Therefore, in the method proposed, Δ and η are considered *together* to be perturbations of an ideal system with repeated eigenvalues. Since the unperturbed system is defective, fractional powers are used.

(2) The key point of the algorithm is to build the tuned system A_0 , after the unmodified system \hat{A} has been given. The basic idea of Section 3 is to perturb the canonical Jordan form

of A_0 by introducing suitable new parameters ξ_i , and equating the perturbed eigenvalues to the unmodified ones. In this way the parameters ξ_i and λ_0 can be found. Therefore, if only two eigenvalues $\hat{\lambda}_k$ are nearly coincident, the unique parameter ξ_1 , together with λ_0 , is sufficient for the purpose; if three eigenvalues $\hat{\lambda}_k$ are nearly coincident, two parameters ξ_1 and ξ_2 must be introduced to perturb the Jordan block, and so on. Therefore the method can easily be extended to more complex cases of several nearly coincident eigenvalues. Some details on the topic are given in the Appendix.

(3) The idea of extending the parameter space in order to find a coalescence point close to the actual point already underlies reference [13]. There, in fact, the perturbation parameter η was allowed to assume complex values and therefore its imaginary part had a rôle equivalent to that of the parameter ξ_1 of the present method. However, only the direct problem was dealt with in reference [13], and the theory cannot be extended in a simple way to solve the inverse problem, if the general case of several nearly coincident eigenvalues is considered.

In closing, the following conclusions can be drawn.

(1) A linear system is nearly defective if two or more eigenvalues are nearly coincident and the associated eigenvectors nearly parallel. It can be considered as a perturbation of an ideal, tuned, defective system having perfectly coincident eigenvalues and eigenvectors.

(2) If modified eigensolutions are evaluated by extrapolating the unmodified nearly coincident eigensolutions, SPE's are obtained in terms of integer powers of the modification parameter η . The SPE's are uniformly valid only in a very small interval of η , so they are not useful for practical purposes.

(3) If modified eigensolutions are extrapolated by the tuned system, MPE's are obtained in terms of fractional powers of two parameters, the mistuning and the modification parameters. MPE's are uniformly valid for any η , except for critical modifications having the character of singular perturbations.

(4) A geometric interpretation of the singular perturbations has been given: they occur when the modification is tangent to the locus of the defective systems in the space of the parameters.

(5) To apply MPE's a tuned system close to the mistuned system should be known. Since in general this is not the case, an ideal tuned system can be artfully built by suitably extending the space of the parameters. The tuned system obtained does not represent any physical system, being only a mathematical tool to solve the problem.

(6) The efficiency of the method has been tested on simple examples. In particular, good accord between exact and perturbational solutions has been found up to modifications of 15%, although an unfavorable case has been considered.

ACKNOWLEDGMENTS

This research has been supported by the Italian Ministry of the University, Scientific and Technological Research (MURST 40% funds).

REFERENCES

1. J. H. WILKINSON 1965 *The Algebraic Eigenvalue Problem*. Oxford: Clarendon Press.
2. T. KATO 1982 *A Short Introduction to Perturbation Theory for Linear Operators*. New York: Springer-Verlag.
3. H. M. ADELMAN and R. T. HAFTKA 1986 *American Institute of Aeronautics and Astronautics Journal* **24**(5), 823–832. Sensitivity analysis of discrete systems.
4. D. V. MURTHY and R. T. HAFTKA 1988 *International Journal for Numerical Methods in Engineering* **26**, 293–311. Derivatives of eigenvalues and eigenvectors of a general complex matrix.

5. J. A. BRANDON 1990 *Strategies for Structural Dynamic Modification*. New York: John Wiley.
6. W. C. MILLS-CURRAN 1988 *American Institute of Aeronautics and Astronautics Journal* **26**(7), 867–871. Calculation of eigenvectors derivatives for structures with repeated eigenvalues.
7. R. L. DAILEY 1989 *American Institute of Aeronautics and Astronautics Journal* **27**(4), 486–491. Eigenvector derivatives with repeated eigenvalues.
8. G. J. HOW and S. P. KENNY 1992 *American Institute of Aeronautics and Astronautics Journal* **30**(9), 2317–2324. Eigenvalue and eigenvector approximate analysis for repeated eigenvalue problems.
9. J. JUANG, P. GHAEMMAGHAMI and K. B. LIM 1989 *Journal of Guidance, Control and Dynamics* **12**(4), 480–486. Eigenvalue and eigenvector derivatives of a nondefective matrix.
10. B. FRIEDMAN 1956 *Principles and Techniques of Applied Mathematics*. New York: John Wiley.
11. A. LUONGO 1994 *American Institute of Aeronautics and Astronautics Journal* **31**(7), 1321–1328. Eigensolutions sensitivity for nonsymmetric matrices with repeated eigenvalues.
12. A. LUONGO 1995 *American Institute of Aeronautics and Astronautics Journal* **33**(1), 120–127. Free vibrations and sensitivity analysis of a defective two-degree-of-freedom system.
13. M. S. TRIANTAFYLLOU and G. S. TRIANTAFYLLOU 1991 *Journal of Sound and Vibration* **150**, 485–500. Frequency coalescence and mode localization phenomena: a geometric theory.
14. W. T. KOITER 1945 *Doctoral Thesis, University of Delft*. On the stability of elastic equilibrium. (English translation NASA Techn. Trans. F-10, 833, 1967).
15. C. PIERRE 1988 *Journal of Sound and Vibration* **126**, 485–502. Mode localization and eigenvalue loci veering phenomena in disordered structures.

APPENDIX: THE INVERSE PROBLEM IN THE GENERAL CASE

An outline of how to extend the algorithm of Section 3 to the more general case of several nearly coincident eigenvalues with associated nearly parallel eigenvectors is given here.

Let $\hat{\lambda}_1, \hat{\lambda}_2, \dots, \hat{\lambda}_\rho$ be ρ nearly-coincident eigenvalues of \hat{A} , the corresponding right and left nearly parallel eigenvectors of which are collected in the $N \times \rho$ matrices \hat{U}_ρ and \hat{V}_ρ , respectively. The unknown ideal defective matrix A_0 has an eigenvalue λ_0 of multiplicity $m = \rho$ and associated generalized eigenvectors matrices X_ρ and Y_ρ , of dimensions $N \times \rho$. The $\rho \times \rho$ Jordan block J_ρ of A_0 is perturbed by $\rho - 1$ parameters ξ_j as follows:

$$\hat{J}_\rho = J_\rho + \delta J_\rho = \begin{bmatrix} \lambda_0 & 1 & & & \\ & \lambda_0 & 1 & & \\ & & \ddots & \ddots & \\ & & & \lambda_0 & 1 \\ \xi_1 & \xi_2 \cdots & \xi_{\rho-1} & & \lambda_0 \end{bmatrix}. \quad (\text{A1})$$

Consequently, the perturbation matrix $\delta A = X_\rho \delta J_\rho Y_\rho^H$ is

$$\delta A = \xi_1 x_\rho y_1^H + \xi_2 x_\rho y_2^H + \cdots + \xi_{\rho-1} x_\rho y_{\rho-1}^H. \quad (\text{A2})$$

The parameters ξ_j and λ_0 must be chosen in such a way that \hat{J}_ρ has ρ eigenvalues equal to $\hat{\lambda}_1, \hat{\lambda}_2, \dots, \hat{\lambda}_\rho$: i.e.,

$$\det(\hat{J}_\rho - \lambda I) = \prod_{k=1}^{\rho} (\lambda - \hat{\lambda}_k) \quad \forall \lambda. \quad (\text{A3})$$

From the previous identity ρ algebraic equations are obtained, which can be solved in sequence for the unknowns $\lambda_0, \xi_{\rho-1}, \xi_{\rho-2}, \dots, \xi_1$. In particular, $\lambda_0 = (\sum_{k=1}^{\rho} \hat{\lambda}_k) / \rho$ is found: i.e., λ_0 is the centre of mass of the points $\hat{\lambda}_k$ on the complex plane.

\hat{J}_ρ admits the spectral representation $\hat{J}_\rho = R_\rho \hat{A}_\rho S_\rho^H$, where $\hat{A}_\rho = \text{diag}(\hat{\lambda}_1, \hat{\lambda}_2, \dots, \hat{\lambda}_\rho)$ and R_ρ and $S_\rho = R_\rho^H$ are $\rho \times \rho$ matrices collecting its right and left eigenvectors, respectively. Therefore, the perturbed matrix $A_0 + \delta A$ has proper eigenvectors matrices $\hat{U}_{0\rho} = X_\rho R_\rho$ and

$\hat{V}_{0\rho} = Y_\rho S_\rho$. By requiring $\hat{U}_{0\rho} = \hat{U}_\rho$ and $\hat{V}_{0\rho} = \hat{V}_\rho$ and solving with respect to the unknown quantities, one finds that

$$X_\rho = \hat{U}_\rho R_\rho^{-1}, \quad Y_\rho = \hat{V}_\rho R_\rho^H. \quad (\text{A4})$$

From equations (A4) the generalized eigenvectors x_1, x_2, \dots, x_ρ and y_1, y_2, \dots, y_ρ are obtained. However, they generally do not satisfy the requested normalization conditions $e_i^\top x_1 = 1$, $e_i^\top x_j = 0$ ($j > 1$) and $y_i^H x_j = \delta_{ij}$. Therefore a new set of normalized eigenvectors $x_k^* = x_k + a_k x_1$ and $y_k^* = y_k + b_k y_\rho$ must be constructed. By using the new vectors, δA can be evaluated from equation (A2) and $A_0 = \hat{A} - \delta A$ computed as a difference. Obviously, if more groups of nearly coincident eigenvalues occurs, the relevant perturbation matrices δA_i must be added among them, as already seen in Section 3.

Finally, it should be noted that, when equations (18) and (19) are used (with δA instead of ξA_ξ), $\delta_1 \lambda_k$ is found to depend on ξ_1 only, $\delta_2 \lambda_k$ on ξ_1 and ξ_2 and so on; moreover, u_* is independent of the ξ 's, as in the particular case $\rho = 2$.