

Rigidity Theory in $SE(2)$ for Unscaled Relative Position Estimation using only Bearing Measurements

Daniel Zelazo, Antonio Franchi, Paolo Robuffo Giordano

► **To cite this version:**

Daniel Zelazo, Antonio Franchi, Paolo Robuffo Giordano. Rigidity Theory in $SE(2)$ for Unscaled Relative Position Estimation using only Bearing Measurements. European Control Conference, ECC'14, Jun 2014, Strasbourg, France. 2014. <hal-00994989>

HAL Id: hal-00994989

<https://hal.inria.fr/hal-00994989>

Submitted on 22 May 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Rigidity Theory in $SE(2)$ for Unscaled Relative Position Estimation using only Bearing Measurements

Daniel Zelazo, Antonio Franchi, Paolo Robuffo Giordano

Abstract—This work considers the problem of estimating the unscaled relative positions of a multi-robot team in a common reference frame from bearing-only measurements. Each robot has access to a relative bearing measurement taken from the local body frame of the robot, and the robots have no knowledge of a common reference frame. An extension of rigidity theory is made for frameworks embedded in the *special Euclidean group* $SE(2) = \mathbb{R}^2 \times \mathcal{S}^1$. We introduce definitions describing rigidity for $SE(2)$ frameworks and provide necessary and sufficient conditions for when such a framework is *infinitesimally rigid* in $SE(2)$. We then introduce the *directed bearing rigidity matrix* and show that an $SE(2)$ framework is infinitesimally rigid if and only if the rank of this matrix is equal to $2|\mathcal{V}| - 4$, where $|\mathcal{V}|$ is the number of agents in the ensemble. The directed bearing rigidity matrix and its properties are then used in the implementation and convergence proof of a distributed estimator to determine the unscaled relative positions in a common frame. Simulation results are given to support the analysis.

I. INTRODUCTION

Control and estimation problems for teams of mobile robots pose many challenges for real-world implementations. These problems are motivated by diverse application domains including deep space interferometry missions, distributed sensing and data collection, and civilian search and rescue operations, amongst others [1]–[4]. Many of these applications involve operating a robot team in environments where access to certain measurements in a common reference frame (i.e., inertial position measurements from GPS) are not available. This motivates control and estimation strategies that rely on sensing and communication capabilities that do not depend on knowledge of a common reference frame.

When *range measurements* are available then the theory of *formation rigidity* provides the correct framework for considering formation control problems [5]–[7]. In [8] it was shown that formation stabilization using distance measurements can be achieved only if rigidity of the formation is maintained. Formation rigidity also provides a necessary condition for estimating relative positions using only relative distance measurements [9], [10]. Distributed control strategies for dynamically maintaining the rigidity property of a formation was recently considered by the authors in [11], [12].

In many real-world scenarios, the sensors used to obtain relative measurements are likely to be physically coupled

to the frame of the robot. Furthermore, the sensors might also introduce additional constraints such as field-of-view restrictions or line-of-sight requirements. In these scenarios, the attitude of each agent must be considered to define the sensing graph. In many distributed control strategies for multi-robot teams using relative sensing, an implicit requirement is the team have knowledge of a common reference frame to generate the correct velocity input vectors. This information is either known directly from special sensors or communication with agents endowed with this information, or it must be estimated by each agent. This problem was considered in [13] for special classes of graphs (and extended to generic graphs using communication) and in [12] when only distance measurements are available.

This paper considers the unscaled relative position (URP) estimation problem for a team of agents that have access to bearing measurements. The adjective ‘unscaled’ means that the positions of the agents are estimated up to a common scale factor. The bearing sensor is attached to the body frame of each agent, and consequently the *attitude* of each agent (as measured from a common inertial frame) will influence which agents can be sensed. In this direction, we consider each agent as a point in $SE(2)$ ¹ The bearing measurements available for each agent induces a *directed* sensing graph. A contribution of this work is to provide necessary and sufficient conditions on the underlying sensing graph and positions of each agent in $SE(2)$ for solving the URP relative position estimation problem with only bearing measurements.

Estimation using only relative bearings as exteroceptive measurements has been considered also in [14], [15]. However, in those works the robots also had access to egomotion sensors in order to disambiguate the anonymity of the measurements, an assumption not required in this work. Another similar problem set-up was also considered in [16]–[18]. The main distinction with this work is the insistence that the bearing measurements between agents are expressed in the *local* frame of the agent. This turns out to be an important assumption and requires a new extension to the theory of rigidity. These works are related to the notion of *parallel rigidity* which attempts to keep the *bearing vector* between neighboring agents constant (i.e., the *formation shape*). Other references utilising parallel rigidity include [2], [13], [19], [20].

This then motivates the study of rigidity for formations in $SE(2)$, which is the main contribution of this work. Similar to parallel rigidity, the objective for formations in $SE(2)$

Daniel Zelazo is with the Faculty of Aerospace Engineering at the Technion-Israel Institute of Technology, Haifa, Israel dzelazo@technion.ac.il.

Antonio Franchi is with CNRS, Laboratoire d’Analyse et d’Architecture des Systèmes (LAAS), 7 Avenue du Colonel Roche, 31077 Toulouse CEDEX 4, France. antonio.franchi@laas.fr

Paolo Robuffo Giordano is with CNRS at IriSa and Inria Rennes Bretagne Atlantique, Campus de Beaulieu, 35042 Rennes Cedex, France prg@irisa.fr.

¹It has a position coordinate in \mathbb{R}^2 and an attitude on the 1-dimensional manifold on the unit circle, \mathcal{S}^1 .

is to define a formation shape while also maintaining the relative bearings between each agent. The main distinction is the bearing measurements are expressed in the *local* frame of each agent, and the corresponding statements on $SE(2)$ rigidity explicitly handle this distinction. Our approach is to mirror the development of formation rigidity, such as can be found in [21], but for frameworks where each node in the directed graph is mapped to a point in $SE(2)$. We derive a matrix we term the *directed bearing rigidity matrix* and show that a formation is infinitesimally rigid in $SE(2)$ if and only if the dimension of the kernel of this matrix is equal to four. Furthermore, we show the infinitesimal motions that span the kernel are the trivial motions of a formation in $SE(2)$, namely the translations, dilations, and coordinated rotations of the formation. The directed bearing rigidity matrix appears in the relative position estimator and provides the essential ingredient for the convergence proof of the estimator.

The paper is organized as follows. A brief review of concepts from rigidity theory with an emphasis on parallel rigidity is provided in §II. The development of rigidity theory for $SE(2)$ is given in §III. The relative position estimation problem is given in §IV, and some numerical simulation examples are given in §V. Finally, concluding remarks and future research directions are discussed in §VI.

Preliminaries and Notations: The set of real numbers will be denoted as \mathbb{R} , the 1-dimensional manifold on the unit circle as \mathcal{S}^1 , and $SE(2) = \mathbb{R}^2 \times \mathcal{S}^1$ is the Special Euclidean Group 2. The standard Euclidean 2-norm for vectors is denoted $\|\cdot\|$. Directed graphs and the matrices associated with them will be widely used in this work; see, e.g., [22]. A directed graph \mathcal{G} is specified by a vertex set \mathcal{V} , an edge set $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$. The *neighborhood* of the vertex i is the set $\mathcal{N}_i = \{j \in \mathcal{V} \mid (i, j) \in \mathcal{E}\}$, and the *out-degree* of vertex i is $d_{out}(i) = |\mathcal{N}_i|$. The incidence matrix $E(\mathcal{G}) \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{E}|}$ is a $\{0, \pm 1\}$ -matrix with rows and columns indexed by the vertices and edges of \mathcal{G} [22]. The *complete directed graph*, denoted $K_{|\mathcal{V}|}$ is a graph with all possible directed edges (i.e. $|\mathcal{E}| = |\mathcal{V}|(|\mathcal{V}| - 1)$). The graph Laplacian of the matrix \mathcal{G} is defined as $L(\mathcal{G}) = E(\mathcal{G})E(\mathcal{G})^T$.

II. PARALLEL RIGIDITY THEORY

In this section we briefly review some fundamental concepts of parallel rigidity [17], [23]. For an overview on distance rigidity theory, please see [21], [24]. Parallel rigidity is built upon the notion of a *bar-and-joint framework*, denoted (\mathcal{G}, p) , where $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ is a directed graph and $p : \mathcal{V} \rightarrow \mathbb{R}^2$ is a function mapping each node of the graph to a point in Euclidean space. In the following we denote by $p(\mathcal{V}) = [p(v_1)^T \cdots p(v_{|\mathcal{V}|})^T] \in \mathbb{R}^{2 \times |\mathcal{V}|}$ the stacked position vector for the framework.

Parallel rigidity is concerned with angles formed between pairs of points and the lines joining them (i.e. the edges in the graph). These angles are measured with respect to some common reference frame. Two frameworks are said to be *equivalent* if $((p_1(v_i) - p_1(v_j))^\perp)^T (p_2(v_i) - p_2(v_j)) = 0$ for all $\{v_i, v_j\} \in \mathcal{E}$,² and *congruent* if $((p_1(v_i) - p_1(v_j))^\perp)^T (p_2(v_i) - p_2(v_j)) = 0$ for all pairs $v_i, v_j \in \mathcal{V}$.

²The notation x^\perp denotes a $\frac{\pi}{2}$ counterclockwise rotation of x .

Observe that for two frameworks to be congruent requires that the line segment between any pair of nodes in one framework is *parallel* to the corresponding segment in the other framework. Thus, two parallel congruent frameworks are related by an appropriate sequence of *rigid-body translations* and *dilations* of the framework.

Definition II.1 (Global Rigidity). *A framework (\mathcal{G}, p) is parallel globally rigid if all parallel equivalent frameworks to (\mathcal{G}, p) are also parallel congruent to (\mathcal{G}, p) .*

Consider now a trajectory defined by the time-varying position vector $q(t) \in \mathbb{R}^{2 \times |\mathcal{V}|}$. We consider trajectories that are equivalent to a given framework (\mathcal{G}, p) for all time. This induces a set of linear constraints that can be expressed as

$$((p(v_i) - p(v_j))^\perp)^T (\dot{q}_i(t) - \dot{q}_j(t)) = 0 \quad (1)$$

for all $\{v_i, v_j\} \in \mathcal{E}$. Here we employed a short-hand notation $q_i(t)$ to denote the position of node v_i in the time-varying framework $(\mathcal{G}, q(t))$. The velocities $\dot{q}(t)$ that satisfy the above constraints are referred to as the *infinitesimal motions* of a framework. Frameworks with infinitesimal motions that satisfy (1) and result in only rigid-body translations and dilations are known as *infinitesimally rigid*.

The $|\mathcal{E}|$ linear constraints given in (1) can be equivalently written in matrix form as

$$R_{\parallel, \mathcal{G}}(p(\mathcal{V}))\dot{q}(t) = 0. \quad (2)$$

The matrix $R_{\parallel, \mathcal{G}}(p(\mathcal{V})) \in \mathbb{R}^{|\mathcal{E}| \times 2|\mathcal{V}|}$ is referred to as the *parallel rigidity matrix*. The null-space of these matrices thus describe the infinitesimal motions. The main result of this section is summarized below.

Theorem II.2. *A framework (\mathcal{G}, p) is parallel infinitesimally rigid if and only if $\text{rk}[R_{\parallel, \mathcal{G}}(p(\mathcal{V}))] = 2|\mathcal{V}| - 3$. Furthermore, the three dimensional null-space of the parallel rigidity matrix are correspond to rigid-body translations and dilations of the framework.*

III. RIGIDITY IN $SE(2)$

The concepts of distance and parallel rigidity introduced in §II provides a framework for describing formation shapes in \mathbb{R}^2 . In this section, we extend these notions of rigidity for frameworks that are embedded $SE(2)$. Our discussion follows closely the presentation of rigidity given in [21], [25]. To begin, we first modify the traditional bar-and-joint framework to handle points in $SE(2)$.

Definition III.1. *An $SE(2)$ framework is the triple (\mathcal{G}, p, ψ) , where $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ is a directed graph, $p : \mathcal{V} \rightarrow \mathbb{R}^2$ and $\psi : \mathcal{V} \rightarrow \mathcal{S}^1$ maps each vertex to a point in $SE(2) = \mathbb{R}^2 \times \mathcal{S}^1$.*

We denote by $\chi(v) = (p(v), \psi(v)) \in SE(2)$ the position and attitude vector of node $v \in \mathcal{V}$. For notational convenience, we will refer to the vectors $\chi_p = p(\mathcal{V}) \in \mathbb{R}^{2 \times |\mathcal{V}|}$ and $\chi_\psi = \psi(\mathcal{V}) \in \mathcal{S}^{1 \times |\mathcal{V}|}$ as the position and attitude components of the complete framework configuration. The vector $\chi(\mathcal{V}) \in SE(2)^{|\mathcal{V}|}$ is the stacked position and attitude vector for the complete framework. We also denote by $\chi_p^x \in \mathbb{R}^{|\mathcal{V}|}$ (χ_p^y) as the x -coordinate (y -coordinate) vector for the framework configuration.

The defining feature of rigidity in $SE(2)$ is the specification of formations that maintain the *relative bearing* angle between points in the framework with respect to the *local frame* of each point. This is motivated by scenarios where a robot in a multi-robot team is able to measure the relative bearing between itself and other robots. The explicit use of *directed graphs* in the definition of $SE(2)$ frameworks reinforces this motivation when considering that relative bearing sensors are likely to be attached to the body frame of the robots, and will have certain constraints such as field-of-view restrictions that may exclude certain measurements, and in particular, bidirectional or symmetric measurements.

In this venue, we assume that a point $\chi(v) \in SE(2)$ has a bearing measurement of the point $\chi(u)$ if and only if the directed edge (v, u) belongs to the graph \mathcal{G} (i.e., $(v, u) \in \mathcal{E}$); this measurement is denoted $\beta_{vu} \in \mathcal{S}^1$. The relative bearing is measured from the body coordinate system of that point.

We define the *directed bearing rigidity function* associated with the $SE(2)$ framework, $b_{\mathcal{G}} : SE(2)^{|\mathcal{V}|} \rightarrow \mathcal{S}^{1^{|\mathcal{E}|}}$, as

$$b_{\mathcal{G}}(\chi(\mathcal{V})) = [\beta_{e_1} \ \cdots \ \beta_{e_{|\mathcal{E}|}}]^T; \quad (3)$$

we use the notation $e_i \in \mathcal{E}$ to represent a directed edge in the graph and assume a labeling of the edges in \mathcal{G} .

The bearing measurement can be equivalently written as a unit vector pointing from the body coordinate of the point $\chi(v)$ to the point $\chi(u)$, i.e.,

$$r_{vu}(p, \psi) = \begin{bmatrix} r_{vu}^x \\ r_{vu}^y \end{bmatrix} = \begin{bmatrix} \cos(\beta_{vu}) \\ \sin(\beta_{vu}) \end{bmatrix}, \quad (4)$$

which also satisfies the relationship $\beta_{vu} = \text{atan}\left(\frac{r_{vu}^y}{r_{vu}^x}\right)$. Observe, therefore, that the bearing measurement can be expressed directly in terms of the relative positions and attitudes of the points expressed in the world frame,

$$\begin{aligned} r_{vu}(p, \psi) &= \begin{bmatrix} \cos(\psi(v)) & \sin(\psi(v)) \\ -\sin(\psi(v)) & \cos(\psi(v)) \end{bmatrix} \frac{(p(u) - p(v))}{\|p(v) - p(u)\|} \\ &= T(\psi(v))^T \frac{(p(u) - p(v))}{\|p(v) - p(u)\|} = T(\psi(v))^T \bar{p}_{vu}, \end{aligned}$$

where the matrix $T(\psi(v))$ is a rotation matrix from the world frame to the body frame of agent v , and \bar{p}_{vu} is a shorthand notation for describing the normalized relative position vector from v to u .

We now introduce formal definitions for rigidity in $SE(2)$, and for the notions of equivalent and congruent formations in $SE(2)$ frameworks.

Definition III.2 (Rigidity in $SE(2)$). *The $SE(2)$ framework (\mathcal{G}, p, ψ) is rigid in $SE(2)$ if there exists a neighborhood S of $\chi(\mathcal{V}) \in SE(2)^{|\mathcal{V}|}$ such that*

$$b_{K_{|\mathcal{V}|}}^{-1}(b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V}))) \cap S = b_{\mathcal{G}}^{-1}(b_{\mathcal{G}}(\chi(\mathcal{V}))) \cap S,$$

where $b_{K_{|\mathcal{V}|}}^{-1}(b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V}))) \subset SE(2)$ denotes the pre-image of the point $b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V}))$ under the directed bearing rigidity map.

The $SE(2)$ framework (\mathcal{G}, p, ψ) is *roto-flexible* in $SE(2)$ if there exists an analytic path $\eta : [0, 1] \rightarrow SE(2)^{|\mathcal{V}|}$ such that $\eta(0) = \chi(\mathcal{V})$ and

$$\eta(t) \in b_{\mathcal{G}}^{-1}(b_{\mathcal{G}}(\chi(\mathcal{V}))) - b_{K_{|\mathcal{V}|}}^{-1}(b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V})))$$

for all $t \in (0, 1]$.

This definition states that an $SE(2)$ framework (\mathcal{G}, p, ψ) is rigid if and only if for any point $q \in SE(2)$ sufficiently close to $\chi(\mathcal{V})$ with $b_{\mathcal{G}}(\chi(\mathcal{V})) = b_{\mathcal{G}}(q)$, that there exists a local bearing preserving map of $SE(2)$ taking $\chi(\mathcal{V})$ to q . The term *roto-flexible* is used to emphasize that an analytic path in $SE(2)$ can consist of motions in the plane in addition to angular rotations about the body axis of each point.

Definition III.3 (Equivalent and Congruent $SE(2)$ Frameworks). *Frameworks (\mathcal{G}, p, ψ) and (\mathcal{G}, q, ϕ) are bearing equivalent if*

$$T(\psi(u))^T \bar{p}_{uv} = T(\phi(u))^T \bar{q}_{uv}, \quad (5)$$

for all $(u, v) \in \mathcal{E}$ and are bearing congruent if

$$\begin{aligned} T(\psi(u))^T \bar{p}_{uv} &= T(\phi(u))^T \bar{q}_{uv} \text{ and} \\ T(\psi(v))^T \bar{p}_{vu} &= T(\phi(v))^T \bar{q}_{vu}, \end{aligned}$$

for all $u, v \in \mathcal{V}$.

Definition III.4 (Global rigidity of $SE(2)$ Frameworks). *A framework (\mathcal{G}, p, ψ) is globally rigid in $SE(2)$ if every framework which is bearing equivalent to (\mathcal{G}, p, ψ) is also bearing congruent to (\mathcal{G}, p, ψ) .*

Parallel rigidity is built on frameworks where the underlying graph is *undirected*. On the other side rigidity in $SE(2)$ is explicitly defined for directed graphs. We now define a corresponding notion of infinitesimal rigidity for $SE(2)$ frameworks. Using the language introduced in Definition III.2, we consider a smooth motion along the path η with $\eta(0) = \chi(\mathcal{V})$ such that the initial rate of change of the directed bearing rigidity function is zero. All such paths satisfying this property are the infinitesimal motions of the $SE(2)$ framework, and are characterized by the null-space of the Jacobian of the directed bearing rigidity function, $\nabla_{\chi} b_{\mathcal{G}}(\chi(\mathcal{V}))$, as can be seen by examining the first-order Taylor expansion of the directed bearing rigidity function.

In this venue, we introduce the *directed bearing rigidity matrix*, $\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))$ as the Jacobian of the directed bearing rigidity function,

$$\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V})) := \nabla_{\chi} b_{\mathcal{G}}(\chi(\mathcal{V})) \in \mathbb{R}^{|\mathcal{E}| \times 3|\mathcal{V}|}. \quad (6)$$

If a path η is contained entirely in $b_{K_{|\mathcal{V}|}}^{-1}(b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V})))$ for all $t \in [0, 1]$, then the infinitesimal motions are entirely described by the tangent space to $b_{K_{|\mathcal{V}|}}^{-1}(b_{K_{|\mathcal{V}|}}(\chi(\mathcal{V})))$, that we denote by T_p . Furthermore, the space T_p must therefore be a subspace of the kernel of the directed bearing rigidity matrix for any other graph \mathcal{G} , i.e. $T_p \subseteq \mathcal{N}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))]$; this follows from the definition of roto-flexible frameworks given in Definition III.2. This leads us to a formal definition for infinitesimal rigidity of frameworks in $SE(2)$.

Definition III.5 (Infinitesimal Rigidity in $SE(2)$). *An $SE(2)$ framework (\mathcal{G}, p, ψ) is infinitesimally rigid if $\mathcal{N}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))] = \mathcal{N}[\mathcal{B}_{K_{|\mathcal{V}|}}(\chi(\mathcal{V}))]$. Otherwise, it is infinitesimally roto-flexible in $SE(2)$.*

Definition III.5 leads to the main result of this section which relates the infinitesimal rigidity of an $SE(2)$ framework to the rank of the directed bearing rigidity matrix.

Theorem III.6. *An $SE(2)$ framework is infinitesimally rigid if and only if $\mathbf{rk}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))] = 3|\mathcal{V}| - 4$.*

Before proceeding with the proof of Theorem III.6, we first examine certain structural properties of $\mathcal{N}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))]$. First, we observe that the infinitesimal motions of an $SE(2)$ framework are composed of motions in \mathbb{R}^2 with motions in \mathcal{S}^1 for each point. For an infinitesimal motion $\delta\chi \in \mathcal{N}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))]$, let $\delta\chi_p$ denote the velocity component of $\delta\chi$ in $\mathbb{R}^{2|\mathcal{V}|}$ and $\delta\chi_\psi$ be the angular velocity component in $\mathbb{R}^{|\mathcal{V}|}$.

Proposition III.7. *Every infinitesimal motion $\delta\chi \in \mathcal{N}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))]$ satisfies $R_{\parallel, \mathcal{G}}(\chi_p)\delta\chi_p = -R_\psi(\chi_p)\delta\chi_\psi$, where $R_{\parallel, \mathcal{G}}(\chi_p)$ is the parallel rigidity matrix³ defined in (2) and $R_\psi(\chi_p) = D_{\mathcal{G}}(\chi_p)\bar{E}^T(\mathcal{G})$ with $D_{\mathcal{G}}(\chi_p) = \mathbf{diag}\{\ell_{e_1}^2, \dots, \ell_{e_{|\mathcal{E}|}}^2\}$ a diagonal matrix containing the distances squared between all pairs of nodes defined by the edge-set \mathcal{E} , and the matrix $\bar{E} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{E}|}$ is defined as*

$$[\bar{E}(\mathcal{G})]_{ik} = \begin{cases} 1, & \text{if } e_k = (v_i, v_j) \in \mathcal{E} \\ 0, & \text{o.w.} \end{cases}$$

Proof. The result in Proposition III.7 is obtained directly from the evaluation of the Jacobian of the directed bearing rigidity function. \square

The first observation from Proposition III.7 is the relationship between the infinitesimal motions of an $SE(2)$ framework and those of a parallel rigid framework. Indeed, if all agents maintain their attitude, i.e. when $\delta\chi_\psi = 0$, then the constraint reduces to the constraints for parallel rigidity. The corresponding infinitesimal motions are then the translations and dilations of the framework.

If the angular velocities of the agents are non-zero, then the infinitesimal motions of the framework correspond to what we term the *coordinated rotations* of the framework. A coordinated rotation consists of an angular rotation of each agent about its own body axis with a rigid-body rotation of the framework in \mathbb{R}^2 . The coordinated rotations that satisfy Proposition III.7 are thus related to the subspace

$$\mathcal{R}_{\circlearrowleft}(\mathcal{G}) = \mathbf{IM}\{R_{\parallel, \mathcal{G}}(\chi_p)\} \cap \mathbf{IM}\{-R_\psi(\chi_p)\} \subset \mathbb{R}^{|\mathcal{E}|},$$

that we term the *coordinated rotation subspace*. Formally, the coordinated rotations can be constructed as

$$\delta\hat{\chi}_p \in R_{\parallel, \mathcal{G}}^{-1}[\mathcal{R}_{\circlearrowleft}(\mathcal{G})], \text{ and } \delta\hat{\chi}_\psi = -R_\psi^\dagger(\chi_p)R_{\parallel, \mathcal{G}}(\chi_p)\delta\hat{\chi}_p,$$

where by $(A)^{-1}[W]$ we mean the pre-image of the set W under the mapping A , and M^\dagger is the left-generalized inverse of the matrix M .

Proposition III.8. *The coordinated rotation subspace is non-trivial. Equivalently, $\dim \mathcal{R}_{\circlearrowleft}(\mathcal{G}) \geq 1$.*

Proof. We prove this by explicitly constructing a vector in the coordinated rotation subspace. Consider a rigid-body rotation of the framework in \mathbb{R}^2 described by

$$z_p = \left(I_{|\mathcal{V}|} \otimes \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix} \right) \chi_p.$$

³The parallel rigidity matrix as shown in Proposition III.7 is slightly different than what was presented in (2). Proposition III.7 explicitly considers directed graphs, and therefore, a bidirectional edge results in two identical rows in Proposition III.7, whereas in (2) it is treated as a single edge.

It is a straight-forward exercise to verify that $R_{\parallel, \mathcal{G}}(\chi_p)z_p = D_{\mathcal{G}}(\chi_p)\mathbf{1}_{|\mathcal{E}|}$. Furthermore, from the construction of \bar{E} it follows that $\bar{E}^T \mathbf{1}_{|\mathcal{V}|} = \mathbf{1}_{|\mathcal{E}(\mathcal{G})|}$ and therefore $R_{\parallel, \mathcal{G}}(\chi_p)z_p = D_{\mathcal{G}}(\chi_p)\bar{E}^T(\mathcal{G})\mathbf{1}_{|\mathcal{V}|}$ concluding the proof. \square

The proof of Proposition III.8 shows how a coordinated rotation can be constructed for any $SE(2)$ framework. Each point in the framework should rotate about its own axis at the same rate as the rigid-body rotation of the formation. This can be considered the $SE(2)$ extension of the infinitesimal motions associated with distance rigidity. Proposition III.8 can now be used to make a stronger statement about the coordinated rotation subspace for the complete graph.

Proposition III.9. *For the complete directed graph $K_{|\mathcal{V}|}$, $\dim \mathcal{R}_{\circlearrowleft}(K_{|\mathcal{V}|}) = 1$.*

Proof. The proof of Proposition III.8 constructs one vector in the coordinated rotation subspace. Assume that $\dim \mathcal{R}_{\circlearrowleft}(K_{|\mathcal{V}|}) > 1$. Then there must exist at least one other coordinated rotation that is orthogonal to the one constructed in Proposition III.8 and contains a non-trivial angular rotation of points in the framework. Note that in Proposition III.8 each agent was assigned a unit angular velocity in the same (counter-clockwise) direction. Thus, any other choice for angular velocities must either be described by each point rotating in the same direction, but non-uniform velocities, or at least two points rotating in opposite directions.

Considering this observation, it is sufficient to see if such a motion can be constructed for the graph K_2 . In this situation, $\bar{E}(K_2) = I_2$ and one can directly conclude from Proposition III.7 that there can be no additional coordinated rotation than the one described. \square

Corollary III.10. *An $SE(2)$ framework is infinitesimally rigid in $SE(2)$ if and only if*

- 1) $\mathbf{rk}[R_{\parallel, \mathcal{G}}(\chi_p)] = 2|\mathcal{V}| - 3$ and
- 2) $\dim\{\mathcal{R}_{\circlearrowleft}(\mathcal{G})\} = 1$.

Proof. The statement follows directly from Definition III.5, Proposition III.7 and Proposition III.8. \square

We are now ready to prove Theorem III.6.

Proof of Theorem III.6. Assume that $\mathbf{rk}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))] = 3|\mathcal{V}| - 4$. From Propositions III.7 and III.9 we conclude that $\mathbf{rk}[\mathcal{B}_{K_{|\mathcal{V}|}}(\chi(\mathcal{V}))] = 3|\mathcal{V}| - 4$. By definition III.5, we conclude that the $SE(2)$ framework (\mathcal{G}, p, ψ) is infinitesimally rigid. Assume now that the $SE(2)$ framework is infinitesimally rigid. By corollary III.10, we conclude $\mathbf{rk}[R_{\parallel, \mathcal{G}}(p(\mathcal{V}))] = 2|\mathcal{V}| - 3$ and $\dim\{\mathcal{R}_{\circlearrowleft}(\mathcal{G})\} = 1$. Therefore, $\mathbf{rk}[\mathcal{B}_{\mathcal{G}}(\chi(\mathcal{V}))] = 3|\mathcal{V}| - 4$. \square

While the general structure of the coordinated rotation subspace can be difficult to characterize for arbitrary graphs, it does lead to a necessary condition on the underlying graph of the framework for infinitesimal rigidity.

Proposition III.11. *If an $SE(2)$ framework is infinitesimally rigid, then $d_{\text{out}}(v) \geq 1$ for all $v \in \mathcal{V}$.*

Proof. Assume that there exists a node $v \in \mathcal{V}$ such that $d_{\text{out}}(v) = 0$. Then a solution to the expression in Proposition

III.7 is $\delta\chi_p = \mathbf{0}$ and $[\delta\chi_\psi]_i = 1$ if i corresponds to node v and 0 otherwise. This motion does not belong to the subspace T_p and therefore $\mathbf{rk}[\mathcal{B}_G(\chi(\mathcal{V}))] > 3|\mathcal{V}| - 4$ and the framework is not infinitesimally rigid. \square

IV. ESTIMATION OF RELATIVE POSITIONS

Achieving high-level objectives such as formations for multi-robot systems require that all robots have knowledge of a common reference frame. This is to ensure that their velocity inputs vectors are all consistent when maneuvering to achieve the common formation task. However, often the sensed data that is available, such as a relative bearing measurement, is measured from the local body frame of each agent. Furthermore, agents do not have access to a global coordinate system. A requirement for multi-robot systems, therefore, is the ability to *estimate* a common reference frame in order to express to relative position information. This section describes how the results from §III can be used to distributedly estimate a common reference frame from only the relative bearing measurements.

In this direction, we consider an infinitesimally rigid $SE(2)$ framework (\mathcal{G}, p, ψ) . We assume that there are two points in the framework whose Euclidean distance is unknown but positive and constant; these points are indexed as ι and κ (i.e., the position of agent ι is $p(\iota)$). Denote with $\hat{\xi}_{\iota i} \in \mathbb{R}^2$ the estimate of the quantity

$$\xi_{\iota i} = T(\psi(\iota))^T \frac{p(i) - p(\iota)}{\|p(\iota) - p(\kappa)\|} \quad (7)$$

i.e., the relative position (expressed in the body frame of agent ι) of a virtual point that is on the line connecting agent ι and a generic agent i and whose distance from ι is $\frac{\|p(i) - p(\iota)\|}{\|p(\iota) - p(\kappa)\|}$. Denote then with $\hat{\vartheta}_i \in \mathcal{S}^1$ the estimate of the angle $\vartheta(i)$ defined by

$$T(\vartheta(i)) = T(\psi(i))^T T(\psi(\iota)), \quad (8)$$

whose role will be clear in the following. Define then the following quantities:

$$\hat{\xi}_{ij} = \hat{\xi}_{ij} - \hat{\xi}_{\iota i}, \hat{r}_{ij} = T(\hat{\vartheta}_i) \frac{\hat{\xi}_{ij}}{\|\hat{\xi}_{ij}\|}, \hat{\beta}_{ij} = \text{atan2}(\hat{r}_{ij}^y, \hat{r}_{ij}^x). \quad (9)$$

Thus the quantity $\hat{\xi}_{ij}$ is an estimate of the relative position vector from i to j , scaled by the quantity $\|p(\iota) - p(\kappa)\|$, and expressed in a common reference frame whose origin is $p(\iota)$ and orientation is $\psi(\iota)$. Notice that $\hat{\xi}_{ij}$ represents an unscaled estimate (in the sense explained in the Introduction) of the actual relative position between the agents. Similarly, the estimate of the attitude of the point i can be obtained from (8).

The important fact is that if $\hat{\vartheta}(i) = \vartheta(i)$ and $\hat{\xi}_{\iota i}$ is equal to (7) we obtain (using also (8)) that

$$\begin{aligned} \hat{r}_{ij} &= T(\vartheta(i))T(\psi(\iota))^T \frac{p(i) - p(j)}{\|p(i) - p(j)\|} \\ &= T(\psi(i))^T \frac{p(i) - p(j)}{\|p(i) - p(j)\|} = r_{ij}, \end{aligned}$$

which justifies the fact that \hat{r}_{ij} and $\hat{\beta}_{ij}$ represent our estimates of $r_{ij}(p, \psi)$, and β_{ij} , respectively, defined in (4).

Our goal can be then recast as the design of an estimator that is able to compute $\hat{\xi}_{\iota i}$ and $\hat{\vartheta}(i)$ for all $i = 1 \dots |\mathcal{V}|$ using the bearing measurements that corresponds to each directed edge of \mathcal{E} . In order to do so we consider the following estimation error:

$$e(\hat{\xi}, \hat{\vartheta}, p, \psi) = b_G(\chi(\mathcal{V})) - \hat{b}_G(\hat{\xi}, \hat{\vartheta}) \quad (10)$$

where $\hat{b}_G(\hat{\xi}, \hat{\vartheta}) \in \mathbb{R}^{|\mathcal{E}|}$ is the vector of estimated relative bearings obtained from (9). The objective of the estimation algorithm can be then stated as the minimization of the following scalar function

$$J(e) = \frac{1}{2} \left(k_e \|e(\hat{\xi}, \hat{\vartheta}, p, \psi)\|^2 + k_1 \|\hat{\xi}_{\iota \iota}\|^2 + k_2 (\|\hat{\xi}_{\iota \kappa}\|^2 - 1)^2 + k_3 (1 - \cos \hat{\vartheta}(\iota)) \right), \quad (11)$$

where the nonnegative terms $k_1 \|\hat{\xi}_{\iota \iota}\|^2$, $k_2 (\|\hat{\xi}_{\iota \kappa}\|^2 - 1)^2$ and $k_3 (1 - \cos \hat{\vartheta}(\iota))$ account for the fact that at steady state the estimator should let $\hat{\xi}_{\iota \iota}$ converge to 0, $\|\hat{\xi}_{\iota \kappa}\|$ converge to 1, and $\hat{\vartheta}(\iota)$ converge to 0. The positive gains k_e , k_1 , k_2 , and k_3 are introduced here to tune the priority of the single error components within the overall error.

Minimization of (11) can be achieved by following the antigradient of $J(e)$, i.e., by choosing:

$$\begin{bmatrix} \dot{\hat{\xi}} \\ \dot{\hat{\vartheta}} \end{bmatrix} = -k_e (\nabla_{(\hat{\xi}, \hat{\vartheta})} e)^T e - g(\hat{\xi}, \hat{\vartheta}) \quad (12)$$

where

$$g(\hat{\xi}, \hat{\vartheta}) = [\dots k_1 \hat{\xi}_{\iota \iota} \dots k_2 (\hat{\xi}_{\iota \kappa}^T \hat{\xi}_{\iota \kappa} - 1) \hat{\xi}_{\iota \kappa} \dots k_3 \sin \hat{\vartheta}(\iota) \dots]^T,$$

and the terms $k_1 \hat{\xi}_{\iota \iota}$, $k_2 (\hat{\xi}_{\iota \kappa}^T \hat{\xi}_{\iota \kappa} - 1) \hat{\xi}_{\iota \kappa}$, and $k_3 \sin \hat{\vartheta}(\iota)$ appear at the ι -th and κ -th entry pairs of $\hat{\xi}$ and ι -th entry of $\hat{\vartheta}$, respectively, and all the other terms are zero.

As a matter of fact, considering that $b_G(\chi(\mathcal{V}))$ is constant, the Jacobian of $e(\hat{\xi}, \hat{\vartheta}, p, \psi)$ can be expressed in terms of the directed bearing rigidity matrix as

$$\nabla_{(\hat{\xi}, \hat{\vartheta})} e = - [D_G^{-1}(\hat{\xi}) R_{\|\cdot\|, \mathcal{G}}(\hat{\xi}) \bar{E}(\mathcal{G})^T]. \quad (13)$$

Note that the form above is consistent with Proposition III.7, which can be obtained from the directed bearing rigidity matrix using an appropriate permutation matrix.

Proposition IV.1. *If the framework (\mathcal{G}, p, ψ) is (infinitesimally) rigid in $SE(2)$ then the vector of true values*

$$\left[T(\psi(\iota)) \frac{p(1) - p(\iota)}{\|p(\iota) - p(\kappa)\|}^T \dots T(\psi(\iota)) \frac{p(|\mathcal{V}|) - p(\iota)}{\|p(\iota) - p(\kappa)\|}^T \vartheta(1) \dots \vartheta(|\mathcal{V}|) \right]^T$$

is an isolated local minimizer of e . Therefore, there exists an $\epsilon > 0$ such that, for all initial conditions $(\hat{\xi}_0^T, \hat{\vartheta}_0)^T$ whose distance from the true values is less than ϵ , the estimation $\hat{\xi}$ and $\hat{\vartheta}$ converge to the true values.

Proof. If the framework is infinitesimally rigid in $SE(2)$, then in any sufficiently small neighborhood of the true bearing values, the only configurations that result $\|e(\hat{\xi}, \hat{\vartheta}, p, \psi)\|^2$ being zero in (11) are the trivial motions of the true values (i.e. the rigid-body translations, dilations, and coordinated rotations). For the true values the remaining terms of (11) are zero and therefore is $J(e) = 0$. If any non-zero trivial motion is applied to the true values then at least one of the

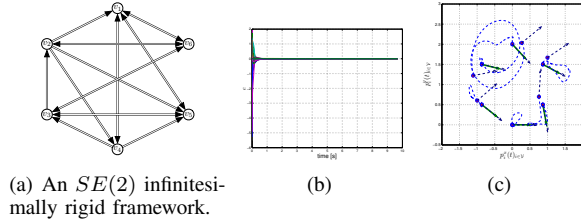


Fig. 1. Simulation with an $SE(2)$ infinitesimally rigid framework.

remaining terms in $J(e)$ becomes positive. This means that the true values is an isolated local minimizer of (11) and that the $J(e)$ is locally convex around the true values. Therefore gradient descent is enough to converge to the true values if the initial error is sufficiently small. \square

V. SIMULATION EXAMPLE

In this section we report a simulation example to illustrate the relative position estimator of Sect. IV. The simulation involves $|\mathcal{V}| = 6$ agents over an $SE(2)$ infinitesimally rigid framework shown in Fig. 1(a). The following gains were employed: $k_e = 5$, $k_1 = k_2 = k_3 = 100$. The initial conditions $\hat{\xi}(t_0)$ and $\hat{\vartheta}(t_0)$ for the estimator (12) were taken as their real values plus a (small enough) random perturbation. Figures 1(b–c) report the results for the simulation. In Fig. 1(b) is shown the behavior of $e(t)$, the error vector between the measured and estimated bearing angles as defined in (10). We note that under the action of the estimator (12), all the $|\mathcal{E}|$ components of $e(t)$ converge to zero as expected owing to the infinitesimal rigidity of the considered framework. Next, Fig. 1(c) shows the trajectories of $\hat{\xi}_{vi}(t)$ and $\hat{\psi}_i(t)$ on the plane (with $\hat{\psi}_i(t)$ obtained from (8) when evaluated upon the estimated $\hat{\vartheta}_i$): here, the real (and constant) poses (p, ψ) are indicated by square symbols and thick green arrows, while the initial $\hat{\xi}_{vi}(t_0)$ and $\hat{\psi}_i(t_0)$ are represented by small circles and dashed black arrows. We can thus note how the estimated position and orientation of every agent converges towards its real value.

VI. CONCLUSION

This work proposed a distributed estimator for estimating the unscaled relative positions of a team of agents in a common reference frame. The key feature of this work is the estimation only requires bearing measurements that are expressed in the local frame of each agent. The estimator builds on a corresponding extension of rigidity theory for frameworks in $SE(2)$. The main contribution of this work, therefore, was the characterization of infinitesimal rigidity in $SE(2)$. It was shown that infinitesimal rigidity of the framework is related to the rank of the directed bearing rigidity matrix. The null-space of that matrix describes the infinitesimal motions of an $SE(2)$ framework, and include the rigid body translations and dilations, in addition to coordinated rotations.

REFERENCES

[1] B. D. O. Anderson, B. Fidan, C. Yu, and D. van der Walle, "UAV formation control: Theory and application," in *Recent Advances in Learning and Control*, ser. Lecture Notes in Control and Information Sciences, V. D. Blondel, S. P. Boyd, and H. Kimura, Eds. Springer, 2008, vol. 371, pp. 15–34.

[2] A. Franchi, C. Secchi, M. Ryll, H. H. Bühlhoff, and P. Robuffo Giordano, "Shared control: Balancing autonomy and human assistance with a group of quadrotor UAVs," *IEEE Robotics & Automation Magazine, Special Issue on Aerial Robotics and the Quadrotor Platform*, vol. 19, no. 3, pp. 57–68, 2012.

[3] R. M. Murray, "Recent research in cooperative control of multi-vehicle systems," *ASME Journal on Dynamic Systems, Measurement, and Control*, vol. 129, no. 5, pp. 571–583, 2006.

[4] A. Franchi, G. Oriolo, and P. Stegagno, "Mutual localization in multi-robot systems using anonymous relative measurements," *The International Journal of Robotics Research*, vol. 32, no. 11, pp. 1302–1322, 2013.

[5] M.-A. Belabbas, "On global stability of planar formations," *IEEE Transactions on Automatic Control*, vol. 58, no. 8, 2013.

[6] I. Shames, B. Fidan, and B. D. O. Anderson, "Minimization of the effect of noisy measurements on localization of multi-agent autonomous formations," *Automatica*, vol. 45, no. 4, pp. 1058–1065, 2009.

[7] T. Tay and W. Whiteley, "Generating isostatic frameworks," *Structural Topology*, vol. 11, no. 1, pp. 21–69, 1985.

[8] L. Krick, M. E. Broucke, and B. A. Francis, "Stabilisation of infinitesimally rigid formations of multi-robot networks," *International Journal of Control*, vol. 82, no. 3, p. 423439, 2009.

[9] J. Aspnes, T. Eren, D. K. Goldenberg, A. S. Morse, W. Whiteley, Y. R. Yang, B. D. O. Anderson, and P. N. Belhumeur, "A theory of network localization," *IEEE Trans. on Mobile Computing*, vol. 5, no. 12, pp. 1663–1678, 2006.

[10] G. C. Calafiore, L. Carlone, and M. Wei, "A distributed gradient method for localization of formations using relative range measurements," in *2010 IEEE Int. Symp. on Computer-Aided Control System Design*, Yokohama, Japan, Sep. 2010, pp. 1146–1151.

[11] D. Zelazo, A. Franchi, F. Allgöwer, H. H. Bühlhoff, and P. Robuffo Giordano, "Rigidity maintenance control for multi-robot systems," in *2012 Robotics: Science and Systems*, Sydney, Australia, Jul. 2012.

[12] D. Zelazo, A. Franchi, H. H. Bühlhoff, and P. Robuffo Giordano, "Decentralized Rigidity Maintenance Control with Range-only Measurements for Multi-Robot Systems," *International Journal of Robotics Research (submitted)*, pp. 1–17, 2013.

[13] A. Franchi and P. Robuffo Giordano, "Decentralized control of parallel rigid formations with direction constraints and bearing measurements," in *2012 IEEE 51st IEEE Conference on Decision and Control (CDC)*. IEEE, Dec. 2012, pp. 5310–5317.

[14] P. Stegagno, M. Cagnetti, A. Franchi, and G. Oriolo, "Mutual localization using anonymous bearing-only measures," in *2011 IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, San Francisco, CA, Sep. 2011, pp. 469–474.

[15] M. Cagnetti, P. Stegagno, A. Franchi, G. Oriolo, and H. H. Bühlhoff, "3-D mutual localization with anonymous bearing measurements," in *2012 IEEE Int. Conf. on Robotics and Automation*, St. Paul, MN, May 2012, pp. 791–798.

[16] T. Eren, W. Whiteley, A. S. Morse, P. N. Belhumeur, and B. D. Anderson, "Sensor and Network Topologies of Formations with Direction, Bearing, and Angle Information between Agents," in *Proceedings of the 42nd IEEE Conference on Decision and Control*, 2003., 2003, pp. 3064–3069.

[17] T. Eren, "Formation shape control based on bearing rigidity," *International Journal of Control*, vol. 85, no. 9, pp. 1361–1379, Sept. 2012.

[18] A. N. Bishop, I. Shames, and B. D. Anderson, "Stabilization of rigid formations with direction-only constraints," in *IEEE Conference on Decision and Control and European Control Conference*, vol. 746, no. 1. IEEE, Dec. 2011, pp. 746–752.

[19] I. Shames, A. N. Bishop, and B. D. O. Anderson, "Analysis of Noisy Bearing-Only Network Localization," *IEEE Transactions on Automatic Control*, vol. 58, no. 1, pp. 247–252, Jan. 2013.

[20] B. Servatius and W. Whiteley, "Constraining plane configurations in cad: combinatorics of directions and lengths," *SIAM Journal on Discrete Mathematics*, vol. 12, pp. 136–153, 1999.

[21] L. Asimov and B. Roth, "The Rigidity of Graphs, II," *Journal of Mathematical Analysis and Applications*, vol. 68, pp. 171–190, 1979.

[22] C. D. Godsil and G. Royle, *Algebraic Graph Theory*. Springer, 2001.

[23] T. Eren, W. Whiteley, A. S. Morse, P. N. Belhumeur, and B. D. O. Anderson, "Sensor and network topologies of formations with direction, bearing, and angle information between agents," in *42th IEEE Conf. on Decision and Control*, Maui, HI, Dec. 2003, pp. 3064–3069.

[24] B. Jackson, "Notes on the Rigidity of Graphs," in *Levico Conference Notes*, 2007.

[25] L. Krick, M. E. Broucke, and B. A. Francis, "Stabilisation of infinitesimally rigid formations of multi-robot networks," *International Journal of Control*, vol. 82, no. 3, pp. 423–439, Mar. 2009.