

# Flow Aggregation Using Dynamic Packet State

Addisu Eshete, Yuming Jiang

► **To cite this version:**

Addisu Eshete, Yuming Jiang. Flow Aggregation Using Dynamic Packet State. Finn Arve Aagesen; Svein Johan Knapskog. 16th EUNICE/IFIP WG 6.6 Workshop on Networked Services and Applications - Engineering, Control and Management (EUNICE), Jun 2010, Trondheim, Norway. Springer, Lecture Notes in Computer Science, LNCS-6164, pp.263-265, 2010, Networked Services and Applications - Engineering, Control and Management. <10.1007/978-3-642-13971-0\_27>. <hal-01056488>

**HAL Id: hal-01056488**

**<https://hal.inria.fr/hal-01056488>**

Submitted on 20 Aug 2014

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# Flow Aggregation using Dynamic Packet State

Addisu Eshete and Yuming Jiang

Center for Quantifiable Quality of Service in Communication Systems  
Norwegian University of Science and Technology  
addisu.eshete@q2s.ntnu.no ymjiang@ieee.org

## 1 Introduction

While the Internet is tremendously scalable, it is based on simplistic design that provides only egalitarian best effort service for all traffic types. Two architectural extensions have been proposed, namely Intserv and Diffserv, to enhance the service architecture. While Integrated Services (Intserv) can provide hard Quality of Service (QoS) requirements (delay and bandwidth) to individual flows end to end, its per-flow mechanisms and signaling overhead make it too complex to be readily deployed in the Internet core. On the other hand, Differentiated Services (Diffserv) restores the scalability of the Internet by dropping per flow mechanisms and merging of flows into aggregates. The price paid is the lack of flexible and powerful services at flow granularity levels.

In this work, we plan to address the question: **can we *simultaneously* provide efficient and scalable QoS and also fulfil the requirements of individual constituent flows?**

## 2 The Techniques— Flow Aggregation and DPS

To provide scalability, we can employ flow aggregation which provides a host of benefits: (1) the number of flows in the core of networks are reduced, and so are the complexity associated with per flow management and operations at core routers, (2) scheduler efficiency of routers can be improved [2], and (3) when the reserved rate of a flow is coupled with delay as in guaranteed rate schedulers [3], flow aggregation can result in tighter bounds of the queueing delay [1, 2]. However, there are known issues with flow aggregation. We outline two known problems: (1) FIFO aggregation of EF traffic in large arbitrary networks may explode the delay bound after a certain utilization threshold [1, 4] and it is not possible to provide delay bounds for high utilization levels in these networks, and (2) flow aggregation usually needs to be nonwork-conserving to be fair to individual constituent flows. Continuous proliferation of very high capacity links means that the first issue may not be the major problem. The main challenge is the impact of (work-conserving) aggregation on the resulting QoS provision of the constituent flows of the aggregate.

To provide efficient flow aggregation that also satisfies flow requirements, we plan to use *dynamic packet state* (DPS) [5]. Using DPS, per flow states or


requirements are inserted into the packet headers at the edge as labels, freeing core routers from the task of maintaining flow states. The states to be encoded are dynamic since the current flow state is recomputed at each node and encoded as the packet traverses through the network. These labels are then used to coordinate the actions of distributed algorithms in the network domain. The labels are ultimately removed at the egress nodes for interoperability to existing architectures.

### 3 Our Approach

It is important to note we use flow aggregation for scalability, and DPS to make it efficient (work-conserving) and able to fulfill per flow requirements.

A schematic of our conceptual system model is shown in Fig. 1. Flows with similar characteristics are aggregated at the ingress node. We assume that routers have aggregation capability at their output ports. Core routers  $C_1$  and  $C_2$  are aware of the aggregate flow  $f_{1,2}$  but they have no knowledge of the constituent flows  $f_1$  and  $f_2$ . The challenge is to preserve the quality of service requirements of constituent flows in the network core without the core routers knowing the composition of the aggregate flow.

**Fig. 1.** Flow aggregation.  $f_1$  and  $f_2$  are constituents of flow  $f_{1,2}$  while  $f_3$  is cross traffic.

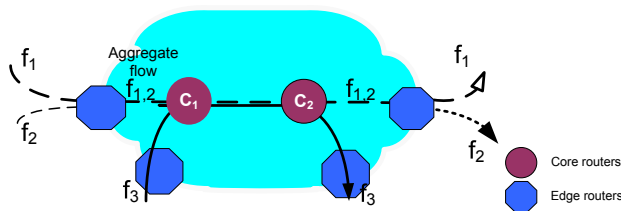

We propose a *virtual GR* which is a variant of GR (Guaranteed Rate) scheduling [3] modified for aggregation. At entrance to the domain, ingress node ( $j = 1$ ), we start by encoding the *vGRC* for packet  $i$  of the flow as follows:

$$e_1^i = \max \{ a_1^i, vGRC_1^{i-1} \} \quad \text{where } vGRC_1^i = e_1^i + l^i/r \quad (1)$$

At inner node  $j$ , when packet  $p^i$  arrives it is assigned:

$$\begin{aligned} e_j^i &= vGRC_{j-1}^i \\ vGRC_j^i &= e_j^i + l^i/r \end{aligned} \quad (2)$$

where  $r$  is flow rate at simple scheduler and sum of flow rates at an aggregator. The QoS provided to the individual flows using this scheme should be comparable to the per flow schemes without aggregation. We believe the result of this work will be very useful to provide QoS guarantees to flows in a scalable manner in the future Internet.

## References

1. A. Charny and J.-Y. Le Boudec. Delay bounds in a network with aggregate scheduling. In *Proceedings of Quality of Future Internet Services*, pages 1–13, 2000.
2. J. A. Cobb. Preserving quality of service guarantees in spite of flow aggregation. *IEEE/ACM Trans. on Networking*, 10(1):43 – 53, Feb 2002.
3. P. Goyal, S. S. Lam, and H. M. Determining end-to-end delay bounds in heterogeneous networks. *Multimedia System*, 5(3):157–163, May 1997.
4. Y. Jiang. Delay bounds for a network of guaranteed rate servers with fifo aggregation. *Computer Networks*, 40(6):683–694, 2002.
5. I. Stoica. *Stateless Core: A Scalable Approach for Quality of Service in the Internet*. PhD thesis, CMU, Pittsburgh,USA, Dec 2000.