



# A Nonlinear Model Predictive Concept for Control of Two-Phase Flows Governed by the Cahn-Hilliard Navier-Stokes System

Michael Hinze, Christian Kahle

## ► To cite this version:

Michael Hinze, Christian Kahle. A Nonlinear Model Predictive Concept for Control of Two-Phase Flows Governed by the Cahn-Hilliard Navier-Stokes System. Dietmar Hömberg; Fredi Tröltzsch. 25th System Modeling and Optimization (CSMO), Sep 2011, Berlin, Germany. Springer, IFIP Advances in Information and Communication Technology, AICT-391, pp.348-357, 2013, System Modeling and Optimization. <10.1007/978-3-642-36062-6\_35>. <hal-01347555>

**HAL Id: hal-01347555**

**<https://hal.inria.fr/hal-01347555>**

Submitted on 21 Jul 2016

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# A Nonlinear Model Predictive Concept for Control of Two-Phase Flows Governed by the Cahn-Hilliard Navier-Stokes System

Michael Hinze and Christian Kahle

Fachbereich Mathematik,  
Optimierung und Approximation  
Universität Hamburg,  
Bundesstraße 55, 20146 Hamburg, Germany  
{Michael.Hinze,Christian.Kahle}@uni-hamburg.de

**Abstract.** We present a nonlinear model predictive framework for closed-loop control of two-phase flows governed by the Cahn-Hilliard Navier-Stokes system. We adapt the concept for instantaneous control from [6, 12, 16] to construct distributed closed-loop control strategies for two-phase flows. It is well known that distributed instantaneous control is able to stabilize the Burger's equation [16] and also the Navier-Stokes system [6, 12]. In the present work we provide numerical investigations which indicate that distributed instantaneous control also is well suited to stabilize the Cahn-Hilliard Navier-Stokes system.

**Keywords:** Flow control, Navier-Stokes, Cahn-Hilliard, Model Predictive Control, Instantaneous Control, Adaptive Finite Elements

## 1 Introduction

The aim of this work is the development of numerical methods for closed-loop control of two-phase flows governed by the Cahn-Hilliard Navier-Stokes system. The approach is based on an inexact variant of model predictive control called instantaneous control. Instantaneous control in the context of flow control is proposed in e.g. [5, 6, 14], and for distributed control of the Navier-Stokes system is analyzed in [12], where among other things it is shown that the method is able to exponentially stabilize given solution states supposing certain smallness assumptions on the initial conditions. For an overview in the field of nonlinear model predictive control we refer to [20, 21] and also to the monograph [9], where also further references can be found.

The outline of this paper is as follows. In section 2 we describe the concept of nonlinear model predictive control as it is used in the present work, and also introduce instantaneous control. In section 3 we present a brief introduction to the Cahn-Hilliard Navier-Stokes system, including its numerical treatment. In section 4 we describe the instantaneous control strategy for the Cahn-Hilliard Navier-Stokes system and demonstrate its performance at morphing a circle into a square in section 5. We end with some conclusions formulated in section 6

## 2 Nonlinear Model Predictive Control

The aim of model predictive control consist in steering or keeping the state of a dynamical system to or at a given desired trajectory. To fix the concept, we are going to apply it to the Cahn-Hilliard Navier-Stokes system. Let us first consider an abstract dynamical system with initial condition  $x_0$ , state  $x(t)$ , observation  $y(t)$  and control  $u(t)$ :

$$\begin{aligned} \dot{x}(t) + Ax(t) &= b(x, t) + \mathcal{B}u(t), & (t > 0) & \text{ state,} \\ y(t) &= \mathcal{C}x(t) & & \text{ observation,} \\ x(0) &= x_0 & & \text{ initial condition.} \end{aligned} \tag{1}$$

Our aim consists in constructing a nonlinear feedback control law  $K$  with  $\mathcal{B}u(t) = K(x(t))$  which steers the dynamical system to the desired trajectory  $\bar{x}(t)$ , i.e.  $x(t) \xrightarrow{1} \bar{x}(t)$  ( $t \rightarrow \infty$ ). To simplify notations we from here onwards use  $\mathcal{B} = id$  and  $\mathcal{C} = id$ , i.e. we do not distinguish between state and observation and we allow fully distributed controls.

To prepare for model predictve control, system (1) is discretized in time using the semi-implicit Euler method on an equidistant time grid  $0 = t_0 \leq t_1 \leq \dots$  with  $t_{k+1} - t_k = \tau$  for  $k = 0, 1, \dots$ . Here  $x^k$  denotes the state at time  $t_k$  and  $b^k$  denotes the nonlinearity  $b(x^k, t_k)$ . We obtain the time discrete model

$$(I + \tau A)x^{k+1} = x^k + \tau b^k + u^{k+1}, \quad k = 0, 1, \dots \tag{2}$$

For  $L \in \mathbb{N}$  and  $x^j$  given, we consider the optimal control problem

$$\begin{aligned} \min J(x^{j+1}, \dots, x^{j+L}, u^{j+1}, \dots, u^{j+L}) \\ \text{s.t. (2) for } j = k, \dots, k + L - 1, \end{aligned} \tag{\mathcal{P}_k}$$

where

$$J(x^{j+1}, \dots, x^{j+L}, u^{j+1}, \dots, u^{j+L}) := \sum_{i=1}^L \left( \frac{1}{2} \|x^{k+i} - \bar{x}^{k+i}\|^2 + \frac{\alpha}{2} \|u^{k+i}\|^2 \right)$$

Let us note that for  $L = 1$  problem  $(\mathcal{P}_k)$  admits a unique solution. However, in the case  $L > 1$  the solution might not be unique due to the nonlinear character of the transition constraints (2). In this case we assume that  $(\mathcal{P}_k)$  admits a solution.

Now we define the abstract model predictive control strategy using a computing oracle called *RECIPE*.

### Model Predictive Control:

1. Initialization: Specify time grid  $(t_j)$  and discrete state  $\bar{x}$ , set  $k = 0$  and specify  $L_0 > 0$ .
2. Given  $u^k, x^k$ , set  $u^{k+1} = \text{RECIPE}(u^k, x^k, L_k)$ .

3. Solve (2) with  $u^{k+1}$ , i.e. compute  $x^{k+1}$  according to
 
$$(I + \tau A)x^{k+1} = x^k + \tau b(x^k, t_k) + u^{k+1}.$$
4. Set  $k = k + 1$ , goto 2.

In the classical model predictive control context [20, 21] the oracle  $RECIPE(u, x, L)$ , for given  $u, x, L$ , solves the optimal control problem  $(\mathcal{P}_k)$  with  $x^k \equiv x, u^k \equiv u$  and  $L$  the length of the control horizon. From the solution  $(x^{k+1}, \dots, x^{k+L}, u^{k+1}, \dots, u^{k+L})$  only  $x^{k+1}$  and  $u^{k+1}$  are actually used to steer the discrete system to the next time instance  $t_{k+1}$ .

In practical applications often quick response to system changes is necessary. In such cases it may be too time consuming to solve problem  $(\mathcal{P}_k)$  exactly. Instead, an approximate solution could be used. This leads to the so called concept of instantaneous control [6, 12], whose oracle is described next.

**Instantaneous Control:**

Given  $L, x, v$ , then  $u = RECIPE(v, x, L)$  iff  $u = u^{k+1}$ , where  $(x^{k+1}, \dots, x^{k+L}, u^{k+1}, \dots, u^{k+L})$  is the result of a steepest descent step applied to the solution of  $(\mathcal{P}_k)$  with  $x^k \equiv x$  and  $u^k \equiv v$ .

In the case  $L = 1$ , instantaneous control realizes the steps:

- Solve  $(I + \tau A)z = x + \tau b(x, t_k) + v$ ,
- solve  $(I + \tau A^*)\lambda = -(x - z)$ ,
- set  $d = \alpha v - \lambda$ ,
- determine  $\rho > 0$  (step size for steepest descent),
- set  $RECIPE = v - \rho d$ ,

where we have used the adjoint calculus to expose the derivations of the functional  $J$ , see e.g. [15].

Instantaneous control with  $L = 1$  is analytically investigated in [16] for the control of Burger's equation and in [12] for control of the two-dimensional Navier-Stokes system. Among other things it is shown in [12, Thm. 4.4,4.5] that

$$\|x^k - \bar{x}^k\|_{H^1(\Omega)} \leq c\kappa^k \quad \text{for some } \kappa \in (0, 1),$$

and also that instantaneous control may be regarded as the discrete realization of a nonlinear feedback operator  $K$  which is able to steer  $x(t)$  exponentially fast to the desired trajectory  $\bar{x}(t)$ , i.e. with  $u(t) = K(x(t))$  in (1) there holds

$$\|x(t) - \bar{x}(t)\|_{H^1(\Omega)} \leq c \exp\left(-\frac{\rho}{\tau}t\right),$$

where  $\rho$  denotes the step size in the steepest descent algorithm and  $\tau$  is the time step in the discretization, see [12, Thm. 4.1,4.2] for the details.

### 3 The Cahn-Hilliard Navier-Stokes System

The Cahn-Hilliard Navier-Stokes equations are a diffuse interface model for describing two-phase flows. In comparison to sharp interface models (see e.g. [8])

which model the interface between the two components as a sharp line, diffuse interface models allow a partial mixing of the components yielding a small diffuse interface. A derivation of the model used here can be found e.g. in [1]. It is related to the model 'H' for two-phase flows in the classification of Hohenberg and Halperin [17]. We note that there are also models for flows with three components, see e.g [3].

For  $\Omega \subset \mathbb{R}^n$ , ( $n = 2, 3$ ) and  $T > 0$  we here consider the following weak form of the Cahn-Hilliard Navier-Stokes system with double-obstacle free energy according to [2].

Find  $(c(t), w(t), y(t), p(t))$  in  $\mathcal{K} \times H^1(\Omega) \times H_0^1(\Omega) \times L_{(0)}^2(\Omega)$  such that

$$\begin{aligned} & (\partial_t y, v) + \frac{1}{Re}(\nabla y : \nabla v) \\ & + ((y \cdot \nabla) y, v) - (p, \operatorname{div} v) + (c \nabla w, v) = 0 \quad \forall v \in H_0^1(\Omega), \text{ a.e. } t \in (0, T], \quad (3) \end{aligned}$$

$$(-\operatorname{div} y, v) = 0 \quad \forall v \in L_{(0)}^2(\Omega), \text{ a.e. } t \in (0, T], \quad (4)$$

$$c(t) \in \mathcal{K} \quad \text{a.e. } t \in (0, T], \quad (5)$$

$$(\partial_t c, v) + \frac{1}{Pe}(\nabla w, \nabla v) - (c y, \nabla v) = 0 \quad \forall v \in H^1(\Omega), \text{ a.e. } t \in (0, T], \quad (6)$$

$$\gamma^2(\nabla c, \nabla(v - c)) - (w + c, v - c) \geq 0 \quad \forall v \in \mathcal{K}, \text{ a.e. } t \in (0, T], \quad (7)$$

$$c(x, 0) = c^0(x) \quad \forall x \in \Omega, \quad (8)$$

$$\partial_\nu c = 0, \quad \partial_\nu w = 0 \quad \text{on } \partial\Omega \times (0, T], \quad (9)$$

$$y(x, 0) = y^0(x) \quad \forall x \in \Omega, \quad (10)$$

$$y = 0 \quad \text{on } \partial\Omega \times (0, T]. \quad (11)$$

Here, for  $v, w \in H^1(\Omega)$

$$(\nabla v : \nabla w) := \int_{\Omega} \nabla v : \nabla w \, dx = \int_{\Omega} \sum_{i,j=1}^n (\nabla v)_{ij} (\nabla w)_{ij} \, dx,$$

and  $c^0 \in \mathcal{K} := \{v \in H^1(\Omega) \mid |v| \leq 1 \text{ a.e. in } \Omega\}$ ,  $y^0 \in H_0^1(\Omega)$ .

The function  $c$  is called order parameter and satisfies  $c = c(t, x) \in [-1, 1]$ , with  $c \equiv 1$  on the pure  $A$ -phase and  $c \equiv -1$  on the pure  $B$ -phase region, respectively, where  $A$  and  $B$  are the two components of the fluid. Initially, i.e. for  $t = 0$ , we assume that the concentration equals  $c^0$ . The quantity  $w$  represents the chemical potential,  $y$  denotes the mean flow velocity field, i.e.  $y = \frac{1+c}{2} y_A + \frac{1-c}{2} y_B$ , where  $y_A$  and  $y_B$  denote the fluid velocities in the fluid phases  $A$  and  $B$ , respectively, and  $p \in L_{(0)}^2(\Omega) = \{v \in L^2(\Omega) \mid (v, 1) = 0\}$  denotes the mean free pressure of the fluid. The flow profile at  $t = 0$  is given by  $y^0$ . The Péclet number  $Pe$  and the Reynolds number  $Re$  are given physical constants. The parameter  $\gamma$  is related to the width of the diffuse interface region which is of size  $\mathcal{O}(\gamma^2)$  [4].

For an analytical treatment of the above system we refer to [1, Chapter 6.5]. Especially in two space dimensions there exists a unique solution  $(c, w, y, p)$  to

this system and we have

$$y \in C^0([0, T], \mathbf{H}_0^1(\Omega)), \quad c \in BC_\omega([0, T], H^1(\Omega)), \quad \nabla w \in L^2(0, T; L^2(\Omega)).$$

Here,  $BC_\omega([0, T], H^1(\Omega))$  is the space of bounded and weakly continuous functions from  $[0, T]$  with values in  $H^1(\Omega)$ .

### 3.1 Time discretization and treatment of the variational inequality in (7)

For the discretization of (3)–(11) we use the semi-implicit approach proposed in e.g. [7, 19] with constant step size  $\tau > 0$ . The variational inequality in (7) according to [10] is relaxed using Moreau-Yosida regularization. At time instance  $t$  this results in finding  $(y, p, c, w) \in H^1(\Omega)^n \times L^2_{(0)}(\Omega) \times H^1(\Omega) \times H^1(\Omega)$  such that

$$(y - y_{old}, v) + \frac{\tau}{Re}(\nabla y : \nabla v) + \tau((y_{old} \cdot \nabla)y_{old}, v) + \tau(c_{old}\nabla w_{old}, v) - \tau(p, \operatorname{div} v) = 0 \quad \forall v \in H_0^1(\Omega), \quad (12)$$

$$(-\operatorname{div} y, v) = 0 \quad \forall v \in L^2_{(0)}(\Omega), \quad (13)$$

$$(c, v) + \frac{\tau}{Pe}(\nabla w, \nabla v) - \tau(c_{old}y, \nabla v) - (c_{old}, v) = 0 \quad \forall v \in H^1(\Omega), \quad (14)$$

$$\gamma^2(\nabla c, \nabla v) - (w, v) + (\lambda_s(c), v) - (c_{old}, v) = 0 \quad \forall v \in H^1(\Omega). \quad (15)$$

is satisfied. Here the subscript  $_{old}$  refers to the value of the respective function at time  $t_{old} = t - \tau$  and  $\lambda_s(c) = \lambda_s^+(c) + \lambda_s^-(c) = s(\max(0, c - 1) + \min(0, c + 1))$  stems from Moreau-Yosida regularization of (7), see e.g. [10, 11] for details. Let us emphasize that (12)–(15) is decoupled in the sense that using  $y_{old}, c_{old}$  and  $w_{old}$ , the flow  $y$  and the pressure  $p$  at time  $t$  can be computed from (12)–(13), and then using this flow vector  $y$ , the concentration  $c$  and the chemical potential  $w$  are obtained from (14)–(15). Furthermore, normalizing  $p$  by  $(p, 1) = 0$ , it can be shown that (12)–(15) admits a unique solution  $(y, p, c, w)$ , compare [11, Thm 4.1]. The system (14)–(15) is nonlinear and can be treated by semi-smooth Newton methods, see [11].

### 3.2 Spatial Discretization

The spatial discretization is performed by linear finite elements for both the concentration and the chemical potential to obtain finite element approximations  $c^h, w^h$ . For the flowfield and the pressure we use the LBB-stable Taylor-Hood  $P^2 - P^1$  finite elements, see e.g. [18, 22], to obtain finite element approximations  $y^h, p^h$ . For the spatial treatment of the Cahn-Hilliard part (14)–(15) we use the adaptive approach presented in [10, 11]. We emphasize that we use different spatial meshes for the Cahn-Hilliard and the Navier-Stokes part.

## 4 Instantaneous Control of the Cahn-Hilliard Navier-Stokes System

The aim of this section is to develop a simple distributed closed-loop control strategy for the Cahn-Hilliard Navier-Stokes system. It uses instantaneous control with  $L = 1$  on a control horizon which coincides with the time interval of one time step. We consider the idealized situation that the flow can be controlled by a vector field which is distributed over the whole spatial domain and that the concentration  $c$  can be measured in the whole spatial domain. The control goal consists in steering the concentration  $c$  towards a prescribed concentration trajectory  $c_d$  by applying volume forces to the flow field.

Now let  $t_0 = 0$  and  $k \in \mathbb{N}$ . At time instance  $t = t_k$ , for  $\alpha > 0$ , we consider the minimization problem

$$\min J_k(u) := \frac{1}{2} \|c - c_d\|_{L^2(\Omega)}^2 + \frac{\alpha}{2} \|u\|_{L^2(\Omega)}^2 \quad (\mathcal{P}_k)$$

s.t.

$$(y - y_{old}, v) + \frac{\tau}{Re} (\nabla y : \nabla v) + \tau((y_{old} \cdot \nabla) y_{old}, v) + \tau(c_{old} \nabla w_{old}, v) - \tau(p, \operatorname{div} v) = u \quad \forall v \in H_0^1(\Omega), \quad (16)$$

$$(-\operatorname{div} y, v) = 0 \quad \forall v \in L_{(0)}^2(\Omega), \quad (17)$$

$$(c, v) + \frac{\tau}{Pe} (\nabla w, \nabla v) - \tau(c_{old} y, \nabla v) - (c_{old}, v) = 0 \quad \forall v \in H^1(\Omega), \quad (18)$$

$$\gamma^2 (\nabla c, \nabla v) - (w, v) + (\lambda_s(c_{old}), v) - (c_{old}, v) = 0 \quad \forall v \in H^1(\Omega). \quad (19)$$

where now  $old$  refers to the time instance  $t_{k-1}$ .

It is not hard to show that problem  $(\mathcal{P}_k)$  admits a unique solution  $u \in L^2(\Omega)^n$ , which together with  $(y, p, c, w)$  satisfies the adjoint system

$$(p_1, v) + \gamma^2 (\nabla p_2, \nabla v) = (c - c_d, v) \quad \forall v \in H^1(\Omega), \quad (20)$$

$$(p_2, v) = \frac{\tau}{Pe} (\nabla p_1, \nabla v) \quad \forall v \in H^1(\Omega), \quad (21)$$

$$(p_3, v) + \frac{\tau}{Re} (\nabla p_3, \nabla v) - \tau(p_4, \operatorname{div} v) = \tau(p_1 \nabla c_{old}, v) \quad \forall v \in (H_0^1(\Omega))^n, \quad (22)$$

$$(\operatorname{div} p_3, v) = 0 \quad \forall v \in L_{(0)}^2(\Omega), \quad (23)$$

$$\alpha u + p_3 = 0. \quad (24)$$

i.e. there exists a uniquely determined adjoint  $(p_1, p_2, p_3, p_4) \in H^1(\Omega) \times H^1(\Omega) \times H^1(\Omega)^n \times L_{(0)}^2(\Omega)$  which solves (20)–(24). The gradient of  $J_k$  is given by  $\nabla J_k(v) = \alpha v + p_3$ . Its evaluation for a given  $v \in L^2(\Omega)^n$  amounts to first solving (16)–(19) for  $(y, p, c, w)$  and then solving (20)–(23) for  $(p_1, p_2, p_3, p_4)$ .

Let us note that (16)–(19) differ from (12)–(15) in the explicit treatment of the nonlinearity  $\lambda_s$ , which in (19) is frozen at  $t_{old}$ . We emphasize that (16)–(19) is not used to simulate the controlled Cahn-Hilliard Navier-Stokes system, but to construct a feedback operator  $K$  such that  $u = K(y, p, c, w)$ . With this



feedback operator available, system (3)–(11) then is controlled through inserting  $u = K(y, p, c, w)$  as right hand in (3). The resulting system then is treated on the time discrete level as in (12)–(15), where  $K$  is evaluated at  $t_{old}$ , i.e.

$$u = K(y_{old}, p_{old}, c_{old}, w_{old}).$$

Next we describe the construction of  $K$  from (16)–(24). For this purpose let us denote by  $B$  the solution operator associated to the quasi-Stokes problem (12)–(13) and by  $\mathcal{C}$  the linear, fourth order solution operator of the Cahn-Hilliard system (18)–(19). Then the system to obtain  $p_3$  can be written in the form

$$\begin{aligned} y &= B(y_{old} - \tau(y_{old}\nabla y_{old})) - \tau c_{old}\nabla w_{old} + u), \\ c &= \mathcal{C}\left(c_{old} - \tau y\nabla c_{old} + \frac{\tau}{Pe}\Delta(\lambda_s(c_{old}) - c_{old})\right), \\ p_1 &= \mathcal{C}(c - c_d), \text{ and} \\ p_3 &= -\tau B(p_1\nabla c_{old}). \end{aligned}$$

Using these abbreviations, the control  $u$  obtained by the instantaneous control strategy for  $u_0^k = 0$  is given by

$$\begin{aligned} \tilde{y} &= B(y_{old} + \tau b(y_{old}) - \tau c_{old}\nabla w_{old}), \\ \tilde{c} &= \mathcal{C}\left(c_{old} - \tau\nabla c_{old}\tilde{y} + \frac{\tau}{Pe}\Delta(\lambda_s(c_{old}) - c_{old})\right), \\ u &= \rho\tau B\nabla c_{old}\mathcal{C}(\tilde{c} - c_d) =: K(y_{old}, p_{old}, w_{old}, w_{old}) \end{aligned} \quad (25)$$

and is inserted in (12).


Note that this system does not depend on  $\alpha$  since  $u_0^k = 0$ .

The spatially discrete treatment of (12)–(15) with this control is similar as in the uncontrolled case. We note that (24) motivates to use Taylor-Hood finite elements for the discretization of the control, see the concept of variational discretization proposed in [13].

## 5 Numerical Results - Circle2Square


To demonstrate the effectiveness of our control method we now morph a circle into a square with the following setup. As domain we use  $\Omega := (0, 1)^2$ , the initial concentration  $c_0$  is chosen as 1 in  $B_{\frac{1}{4}}(\frac{1}{2}, \frac{1}{2})$  and as  $-1$  in  $\Omega \setminus B_{\frac{1}{4}}(\frac{1}{2}, \frac{1}{2})$ , see Fig. 1 (left). Control is applied to the flow field with control gain of steering  $c$  to the desired state  $c_d$  with values 1 in the square centered at  $(\frac{7}{20}, \frac{7}{20})$ , see Fig. 1 (right), with edge length such that  $(c_0, 1) = (c_d, 1)$ . This requirement is meaningful, since our time discretization scheme is mass-conserving. We choose  $Re = 10$ ,  $Pe = 100$ ,  $\gamma = 1/(40\pi)$ ,  $\alpha = 1e - 4$ ,  $\tau = 0.01$  and use  $\rho = 1$  as step size in the steepest descent method.

Fig. 2 presents snapshots of the concentration after 40 time steps (left) and after 500 time steps (right, where also the controlled flow is depicted). Clearly, the corners formed in  $c_d$  cannot be reached by the controlled concentration, since

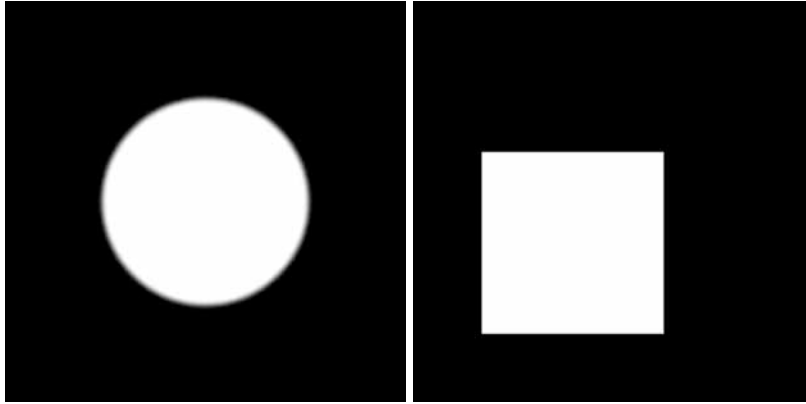


**Fig. 1.** Initial state  $c_0$  (left) and desired state  $c_d$  (right). Black indicates  $-1$ , white indicates  $+1$ .

the phasefield approach used here always delivers a smooth diffuse interface in the present situation. Fig. 3 presents the evaluation of  $d(t) := \|c(t) - c_d(t)\|_{L^2(\Omega)}$  for various Reynolds numbers ranging in the interval  $[10, 200]$ . We observe a clear decrease in  $d(t)$ , till a certain value around  $1e - 1$  is reached. The method is not able to further reduce  $d(t)$  due to the unreachability of  $c_d$ . The oscillations of  $d$  for larger Reynolds numbers can be explained by the indirect control method (flow is controlled, concentration should be steered to  $c_d$ ), which becomes more sensible with increasing Reynolds number.

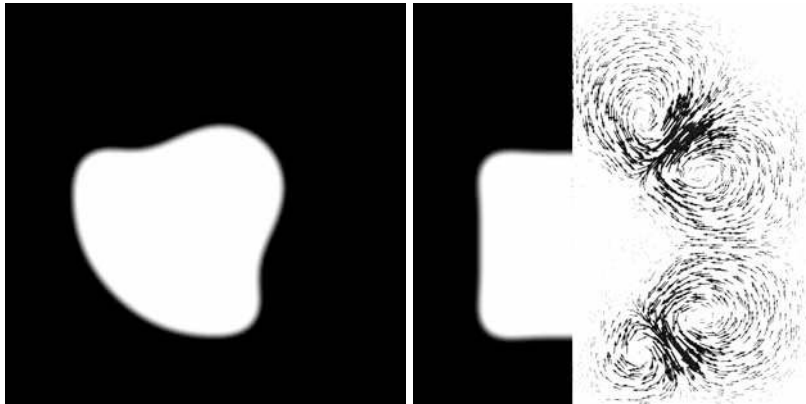

**Fig. 2.** Controlled state at  $t = 40\tau$  and  $t = 500\tau$ .

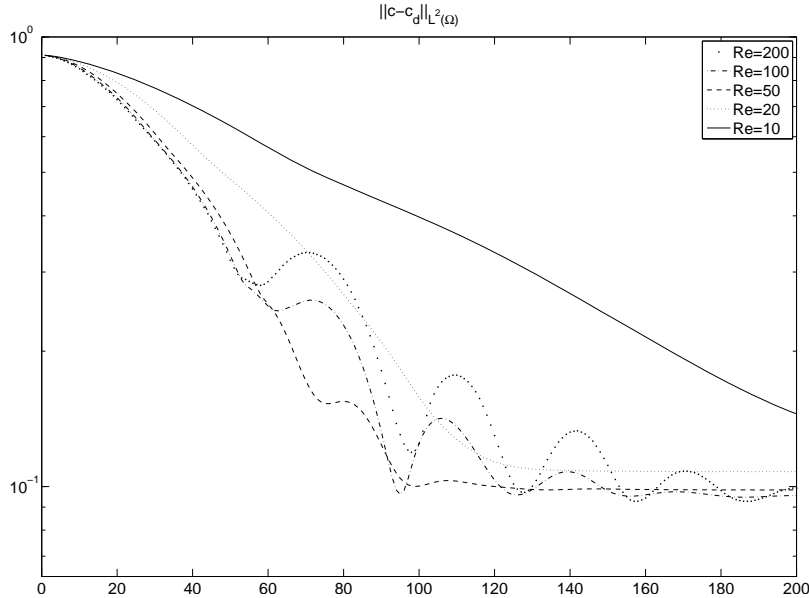

**Fig. 3.** The reduction of  $\|c - c_d\|$  for various Reynolds numbers.

## 6 Conclusion

We have presented a general inexact model predictive control concept called instantaneous control and sketched its interpretation as closed loop controller. For the Cahn-Hilliard Navier-Stokes system we have derived a nonlinear feedback  $u = K(y, p, c, w)$  which realizes instantaneous control on the continuous level. With morphing the circle into a square we have numerically demonstrated the scope and effectiveness of our approach in control of two-phase flows.

## References

1. H. Abels. Diffuse interface models for two-phase flows of viscous incompressible fluids. *Max-Planck Institut für Mathematik in den Naturwissenschaften, Leipzig, Lecture Note no.: 36*, 2007.
2. J.F. Blowey and C.M. Elliott. The Cahn-Hilliard gradient theory for phase separation with non-smooth free energy. Part I: Mathematical analysis. *European Journal of Applied Mathematics*, 2:233–280, 1991.
3. F. Boyer, C. Lapuerta, S. Minjeaud, B. Piar, and M. Quintard. Cahn-Hilliard/Navier-Stokes model for the simulation of three-phase flows. *Transp. Porous Media*, 82(3):463–483, 2010.
4. J.W. Cahn and J.E. Hilliard. Free energy of a nonuniform system-I: Interfacial free energy. *J. Chem. Phys.*, 28:258–267, 1958.
5. H. Choi. Suboptimal control of turbulent flow using control theory. In *Proceedings of the International Symposium on Mathematical Modelling of Turbulent Flows, Tokyo, Japan*, 1995.

6. H. Choi, M. Hinze, and K. Kunisch. Instantaneous control of backward-facing step flows. *Applied numerical mathematics*, 31(2):133–158, October 1999.
7. D.J. Eyre. Unconditionally gradient stable time marching the Cahn-Hilliard equation. In *Computational and Mathematical models of microstructural evolution*, volume 529 of *MRS Proceedings*, 1998.
8. S. Gross and A. Reusken. *Numerical methods for two-phase incompressible flows*, volume 40 of *Springer Series in Computational Mathematics*. Springer, 2011.
9. L. Grüne and J. Pannek. *Nonlinear Model Predictive Control*. Communications and Control Engineering. Springer, 2011.
10. M. Hintermüller, M. Hinze, and C. Kahle. An adaptive finite element Moreau-Yosida-based solver for a coupled Cahn-Hilliard/Navier-Stokes system. preprint, submitted for publication.
11. M. Hintermüller, M. Hinze, and M.H. Tber. An adaptive finite element Moreau-Yosida-based solver for a non-smooth Cahn-Hilliard problem. *Optimization Methods and Software*, 25(4-5):777–811, 2011.
12. M. Hinze. Instantaneous closed loop control of the Navier-Stokes system. *SIAM J. Contr.Optim.*, 44(2):564–583, 2005.
13. M. Hinze. A variational discretization concept in control constrained optimization: the linear quadratic case. *Computational Optimization and Applications*, 30(1):45–61, 2005.
14. M. Hinze and K. Kunisch. *Three control methods for time - dependent Fluid Flow*, volume 60 of *Flow, Turbulence and Combustion*, pages 273–298. Springer, 2000.
15. M. Hinze, R. Pinnau, M. Ulbrich, and S. Ulbrich. *Optimization with PDE constraints*. Springer Verlag, Berlin Heidelberg, 2009.
16. M. Hinze and S. Volkwein. Instantaneous control for the Burgers equation: Convergence analysis and numerical implementation. *Nonlinear Analysis*, 50(1):1–26, July 2002.
17. P.C. Hohenberg and B.I. Halperin. Theory of dynamic critical phenomena. *Rev. Mod. Phys.*, 49(3):435–479, 1977.
18. P. Hood and G. Taylor. *Navier-Stokes equations using mixed interpolation*. Finite Element Methods in Flow Problems. UAH Press, 1974.
19. D. Kay, V. Styles, and R. Welford. Finite element approximation of a Cahn-Hilliard-Navier-Stokes system. *Interfaces and Free Boundaries*, 10(1):15–43, 2008.
20. V. Nevistic and J.A. Primbs. Finite Receding Horizon Control: A General Framework for Stability and Performance Analysis. Technical Report 6, Automatic control laboratory, ETH Zürich, 1997.
21. S.J. Qin and T.A. Badgwell. A survey of industrial model predictive control technology. *Control Engineering practice*, 11:733–764, 2003.
22. R. Verfürth. A posteriori error analysis of space-time finite element discretizations of the time-dependent Stokes equations. *Calcolo*, 47:149–167, 2010.