

Data Quality Evaluation of ZY-1 02C Satellite

Mingquan Wu, Jie Wang, Ni Yao, Zhongwei Hou, Changyao Wang

► **To cite this version:**

Mingquan Wu, Jie Wang, Ni Yao, Zhongwei Hou, Changyao Wang. Data Quality Evaluation of ZY-1 02C Satellite. Daoliang Li; Yingyi Chen. 6th Computer and Computing Technologies in Agriculture (CCTA), Oct 2012, Zhangjiajie, China. Springer, IFIP Advances in Information and Communication Technology, AICT-393 (Part II), pp.187-195, 2013, Computer and Computing Technologies in Agriculture VI. <10.1007/978-3-642-36137-1_23>. <hal-01348231>

HAL Id: hal-01348231

<https://hal.inria.fr/hal-01348231>

Submitted on 22 Jul 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Data Quality Evaluation of ZY-1 02C Satellite

Mingquan Wu², Jie Wang^{1,1}, Ni Yao³, Zhongwei Hou⁴, Changyao Wang²

¹ Institute of Remote Sensing and Earth Sciences, Hangzhou Normal University, Hangzhou 310036, China
wangjie1022@163.com

² The State Key Laboratory of Remote Sensing Science, Institute of Remote Sensing Applications, Chinese Academy of Sciences, Beijing 100101, China
liexuewuwei@163.com

³ Beijing University of Agriculture, Beijing 102206, China

⁴ Liaoning Engineering Survey and Design Institute, Jinzhou Liaoning 121000, China

Abstract. ZY-1 02C satellite is a new Chinese civil remote sensing satellite launched on December 22, 2011. It is the highest resolution civil remote sensing satellite in China which carried panchromatic/multispectral sensor and high resolution sensor. Compared with image of SPOT5 satellite, the radiation quality of ZY-1 02C sensors data was evaluated. The result showed: the SNR of ZY-1 02C is higher than SPOT5 panchromatic band; the power spectrum of ZY-1 02C is close to SPOT5 panchromatic band; however, the mean value and variance of ZY-1 02C data are smaller than SPOT5 panchromatic band, while the skewness and kurtosis of ZY-1 02C data are higher than SPOT5 panchromatic band; the definition of ZY-1 02C data is much smaller than SPOT5 panchromatic band and the entropy is a little smaller than SPOT5 panchromatic band.

Keywords: ZY-1 02C satellite; Data quality evolution; Signal to Noise Ratio; Entropy; Definition.

1 Introduction

Chinese resource satellite (ZY-1 02C) is a new civil remote sensing satellite which was launched on December 22, 2011. It weighs about 2100 kg, 3 years design life, and equipped with panchromatic/multispectral sensor (P/MS) and High-resolution sensor (HR). Its mainly usage is to acquire high-resolution panchromatic and multispectral data for land resources survey and monitoring, disaster prevention and mitigation, forestry, water conservancy, ecological environment, and the state of major projects monitoring.

Data quality evolution is not only an important technology to inspect the design of satellite sensors, but also an important theoretical reference for remote sensing satellite sensor development and band selection[1]. In the last decades, several approaches have been proposed in this study area. Yang YY et.al. [2] evaluated extended service image of CBERS-01, Wang J et.al. [3] evaluated image of CBERS-02, Zhou YB et.al. [4] and Zhang JL et.al. [5] evaluated image of CBERS-02B, Liu R

et.al. [6] evaluated image of HJ-1 satellite, Zhang JL et.al. [7] evaluated image of Hyperion sensor onboard on EO-1 satellite, Wang QJ et.al. [8] evaluated image of LISS3 sensor onboard on IRS-P6 satellite, G H Thomson[9] evaluated image of Arkon-2 satellite. Most of those methods are based on image engineering. We would like to draw your attention to the fact that it is not possible to modify a paper in any way, once it has been published. This applies to both the printed book and the online version of the publication. Every detail, including the order of the names of the authors, should be checked before the paper is sent to the Volume Editors.

2 Study Area

The test area covers a surface of about 104 km² and covered by images of SPOT5 and ZY-01 02C satellite. It is located in the north-east of Beijing, China (40.05° -40.58° N, 116.51° -117.21° E) (fig.1). Most of the area is flat and devoted to agriculture, with a prevalence of winter wheat, corn and urban areas.

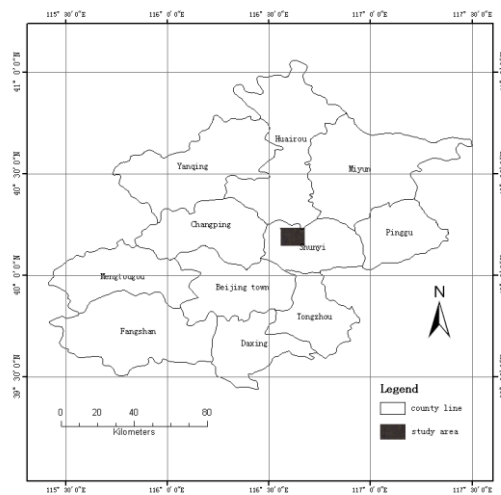


Fig. 1. Location of the study area.

3 Data Introduction

Three ZY-1 02C images and one SPOT5 image were used in this study (Table 1). All of those data were acquired in clear shy conditions and covered the same area.

Table 1. Images used in this study.

Satellite	ZY-1 02C				SPOT5
Sensor	02C-MS	02C-PAN	02C-HR	PAN	Sensor
Path/row	1/107	1/107	395/107	281/269	Path/row
Acquisition time	2012/02/01	2012/02/01	2012/02/13	2007/04/24	Acquisition time
Spatial resolution	10m	5 m	2.36 m	2.5 m	Spatial resolution
Sensor	02C-MS	02C-PAN	02C-HR	PAN	Sensor

3.1 ZY-1 02C Satellite

ZY-1 02C is a high spatial resolution civil remote sensing satellite. It carried one panchromatic/multispectral sensor (P/MS) and two High-resolution cameras (HR) (Table 2).

Table 2. Basic parameters of sensors carried on ZY-1 02C and SPOT5 satellite.

Satellite	ZY-1 02C			SPOT5	
	P/MS	MS	HR	PAN	MS
Sensor	PAN			PAN	MS
Bandwidth(μm)	0.51-0.85	0.52-0.59 0.63-0.69 0.77-0.89	0.50-0.80	0.49-0.69	0.43-0.47 0.49-0.61 0.61-0.68 0.78-0.89
Spatial resolution	5 m	10m	2.36 m	2.5 m or 5m	10m
Swath Width	60km		54km	60km	
Revisit Time(day)	3-5		3-5	2-3	

3.2 SPOT5 Satellite

SPOT5 satellite is the fifth satellite of France SPOT series. It carried two High Resolution Geometric (HRG) sensors, one High-Resolution Stereoscopic (HRS) imaging instrument, and one Vegetation sensor.

Please note that, if your email address is given in your paper, it will also be included in the meta data of the online version.

4 Approach

4.1 Qualitative Evaluation

Image quality of satellite data can be evaluated qualitatively by visual interpretation approach or histogram comparison method. Visual interpretation method judged the

image quality is good or bad directly by naked eyes, while histogram comparison method determined the image quality by histogram comparison. Images with good quality have a smoother and broader histogram.

4.2 Quantitative Evaluation

Radiation quality of satellite data can be evaluated quantitatively by parameters such as radiation precision, Signal to Noise Ratio, sharpness, information content, and power spectrum.

Radiation precision. Radiation precision is an indicator that reflects the radiation situation of images. It can be measured by parameters like mean, variance, skewness and kurtosis. The calculation formulas are as follows:

$$Mean = \bar{x} = \frac{1}{N} \sum_{j=0}^{N-1} x_j \quad (1)$$

$$Variance = \frac{1}{N-1} \sum_{j=0}^{N-1} (x_j - \bar{x})^2 \quad (2)$$

$$Skewness = \frac{1}{N} \sum_{j=0}^{N-1} \left(\frac{x_j - \bar{x}}{\sqrt{Variance}} \right)^3 \quad (3)$$

$$Kurtosis = \frac{1}{N} \sum_{j=0}^{N-1} \left(\frac{x_j - \bar{x}}{\sqrt{Variance}} \right)^4 - 3 \quad (4)$$

Where N is the number of pixels, j is the index of pixels, and x_j is the value of pixel j.

Signal to Noise Ratio. Signal to Noise Ratio is the ratio of signal and noise in image. There are many different methods to calculate the image SNR, and different methods have different result. Some research showed that the image SNR and land cover closely related [10]. Variance method can determine the SNR level of sensors, but the method is influenced by surface target. However, using this method between different sensors in the same area can be used to compare the SNR level between different remote sensing sensors. The calculation formula of SNR by variance method is followed:

$$SNR = Mean / Variance \quad (5)$$

Sharpness. The sharpness reflects the sensitivity of the image edge change. The more distinctive of color contrast of the image junction, the clearer of the image. A improved point sharpness algorithm was used to calculate the image sharpness¹. The calculation formula is followed:

$$p = \frac{\sum_{i=1}^{m \times n} \sum_{\alpha=1}^8 |df / dx|}{m \times n} . \quad (6)$$

Where p is the sharpness, m and n is the line and row number of pixels, df is the amplitude of intensity change, dx is the distance increment between pixels.

Information content. Information content is a indicator that reflect the rich degree of information contained in images. It always measured by information entropy. The calculation formula of entropy is followed:

$$H = -\sum_{i=1}^n P_i \log P_i . \quad (7)$$

Where H is the information entropy, i is the value of pixels, P_i is the probability of value i . Due to the cross correlation between adjacent bands, the redundant information must be removed when calculating total entropy of multiband images [11].

Power spectrum. Image power spectrum reflects the image texture features. When the image quality depredated, the loss of high frequency components will lead to blur of the image space texture and the image power spectrum of each component will fall. Thus, the comparative evaluation of image quality can be evaluated by comparing the image power spectrum¹². Image power spectrum can calculate by Fourier transform. The calculation formula is followed:

$$sum = \sum_{u=0}^{m-1} \sum_{v=0}^{n-1} |\hat{F}(u, v)|^2 \Delta u \Delta v . \quad (8)$$

Where sum is image power spectrum, u and v is the index of pixels, $\hat{F}(u, v)$ is the value of pixel (u, v) after Fourier transform.

5 Result and Analysis

5.1 Result of Qualitative Evaluation

Through visual interpretation approach, we can found out that both SPOT5 image and ZY-1 02C images have a good visual effect (Fig.2). Land cover types like farm land, water and cities were very clear. However, those land cover types have a more strong contrast in SPOT5 image.

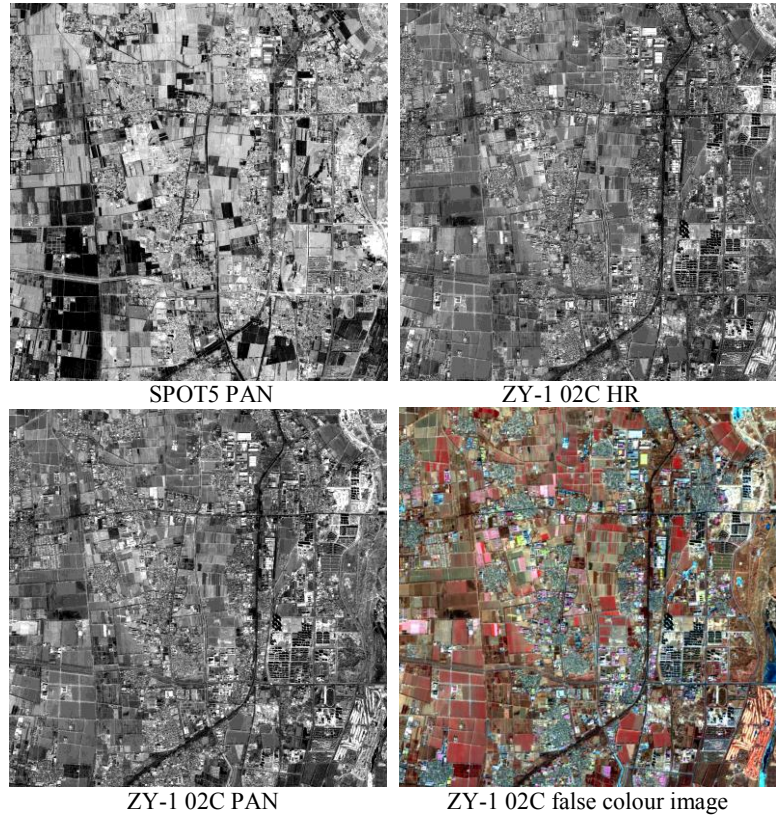
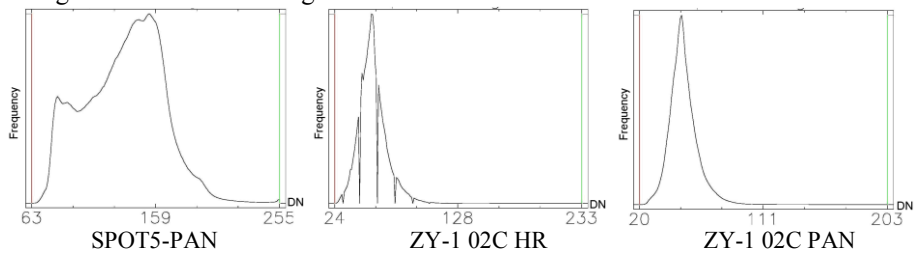


Fig. 2. Images of ZY-102C and SPOT5.

The histogram of SPOT5 PAN band image, and images of ZY-1 02C were calculated by ENVI 4.3 (fig.3). By comparing histogram of those images, we found out that the quality of SPOT5 PAN band image is better than ZY-1 02C images. The histogram of SPOT5 PAN band image is more broad and more smooth, while the histogram of ZY-1 02C images were narrow.



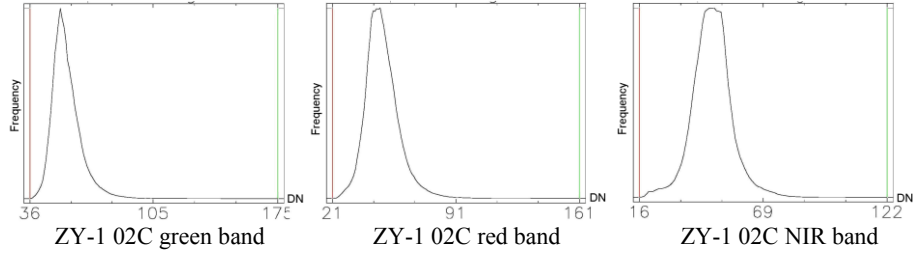


Fig. 2. Histogram comparison of different sensors.

5.2 Result of Quantitative Evaluation

Parameters of radiation precision, Signal to Noise Ratio, sharpness, information content, and power spectrum were calculated to evaluate the radiation quality of ZY-1 02C data and SPOT5 PAN band image (table 3).

Table 3. Quantitative evaluation results of radiation quality.

Parameters	SPOT	HR	Pan	MUX		
				Green	Red	NIR
Mean	135.917	57.246	52.990	56.905	49.918	47.813
Variance	882.993	134.722	101.315	66.393	85.967	64.759
Skewness	-0.087	0.984	1.023	1.698	1.058	0.286
Kurtosis	-0.284	3.449	3.742	7.058	3.435	1.866
SNR	4.574	4.932	5.264	6.984	5.384	5.942
Sharpness	33.115	16.339	19.899	17.586	20.800	17.812
Power spectrum	115.096	107.559	100.855	95.394	94.314	93.914
Entropy	6.816	5.388	5.280	4.596	4.970	5.003
Total entropy	6.816	5.388	5.280	6.649		

By comparing parameters of mean, variance, skewness and kurtosis, we found that the mean and variance of SPOT5 PAN band image is higher than any ZY-1 02C images, while the skewness and kurtosis are smaller. This showed that the value distribution of SPOT5 PAN band image is more smooth and broad, which is coincide with the result of histogram comparison.

The SNR of ZY-1 02C images are higher than SPOT5 PAN band image. The green band image of ZY-1 02C MS sensor has the highest SNR. It is 53% higher than SPOT5 PAN band image, while the red and near-infrared band is 26% and 30% higher than SPOT5 PAN band image. The SNR of pan band of ZY-1 02C is 25% higher than SPOT5 PAN band image. The HR band of ZY-1 02C has a very close SNR with SPOT5 PAN band, which is only 8% higher than SPOT5 PAN band.

The sharpness of SPOT5 PAN band is more higher than any ZY-1 02C images. The HR band of ZY-1 02C has the highest sharpness in ZY-1 02C images. However, its sharpness is only 51% of the sharpness of SPOT5 PAN band.

Images of those two satellites have a close power spectrum. The power spectrum of SPOT5 PAN band is a little higher than images of ZY-1 02C.

The SPOT5 PAN band has higher entropy than any ZY-1 02C images. The entropy of SPOT5 PAN band is about 21%、23%、33%、27% and 27% higher than the entropy of HR band, pan band, green, red and near-infrared band. Even the total entropy of MS images is also a little lower than the entropy of SPOT5 PAN band.

6 Conclusions and Discussion

6.1 Conclusions

Comparing with SPOT5 PAN band, the quality of ZY-1 02C images is similar to SPOT5 PAN band. Each data has distinct advantages and disadvantages.

The SNR of ZY-1 02C images are higher than SPOT5 PAN band. And the Power spectrum of ZY-1 02C images is close to SPOT5 PAN band. However, due to the histogram of ZY-1 02C images is too narrow and abrupt, the ZY-1 02C images cannot distinguish the differences of the surface reflectance very well. The sharpness of ZY-1 02C images is lower than SPOT5 PAN band. Moreover, the entropy of ZY-1 02C images are lower than SPOT5 PAN band.

The ZY-1 02C has not blue band images. This will limit the application of ZY-1 02C data in water monitoring. However, ZY-1 02C have two Panchromatic bands. So the panchromatic data acquisition ability of ZY-1 02C satellite is stronger than SPOT5 satellite.

6.2 Discussion

Due to the lack of higher-resolution topographic maps, the positioning accuracy of ZY-1 02C satellite was not evaluated in this paper. However, the positioning accuracy is a very important index of satellite image quality. So, we will carry out work in this area when conditions are ripe.

Due to data constraints, only SPOT5 PAN band was used as a comparative data. And comparison of multi-spectral bands between SPOT5 and ZY-1 02C satellite was not carried out. The difference of spatial resolution may influence the result of some comparison between SPOT5 PAN band and multispectral bands of ZY-1 02C satellite. Moreover, the acquire date of SPOT5 PAN band is five years earlier than ZY-1 02C images. The change of land cover was not considered in the evolution which has a certain extent effect to evolution result.

Acknowledgments. This work was supported by the opening foundation of Institute of Remote Sensing and Earth Sciences, Hangzhou Normal University, and the Major State Basic Research Development Program of China (2010CB950603).

References

1. Liu Rui, Sun Jiulin, Wang Juanle, et al.: Data quality evaluation of chinese HJ CCD sensor. *Advances in Earth Science*. 26, 971--979 (2011)
2. Yang Yuanyuan, Wang Hongnan, Wang Jing, Xia Deshen.: Reseach on the quality of exceed images provided by CBERS-1 Satellite. *Spacecraft recovery and remote sensing*. 12, 34--39 (2003)
3. Wang Jing, Yang Yuanyuan, Wang Hoynan, Xu Ye, Xia Deshen.: The quality evaluation of the Image Date of CBERS-1No.2 Satellite. *Spacecraft recovery and remote sensing*. 25, 34--38(2004)
4. Zhou Yuji, Tian Qingjiu, Zhang Xuehong.: CBERS-02B CCD image data quality evaluation and application potential for vegetation classification. *Applications of remote sensing*. 6, 47--52(2008)
5. Zhang Jielin, Zhao Yingjun, Zhang Jingbo, et al.: The image quality evaluation of CBERS-02B and the application of the satellite of the interpretation of ore-forming factors of uranium deposits. *Remote sensing for land and resources*. 79, 69--73 (2009)
6. Yang zhongdong, Gu Songyan, Qiu Hon, et al.: CBERS-1's CCD image quality evaluating and cross calibrating study. *Journal of Remote sensing*. 78, 113--120 (2004)
7. Zhou Yuji, Tian Qingjiu.: Image quality evaluation of EO-1 Hyperion sensor. *Geo-information science*. 10, 678--683 (2008)
8. Wang Qinjun, Tian Qingjiu.: Quality evaluation of LISS3 image from IRS-P6 satellite. *Geography and Geo-Information Science*. 23, 11--14 (2007)
9. G H Thomson.: Evaluation of Russian Arkon-2 Earth observation satellite. *The Imaging Science Journal*. 53, 163--173 (2005)
10. Liu Jianguai, Zheng Lanfen, Tong Qingxi.: Estimation of signal to noise ratio of remote sensing images. *Journal of Basic Science and Engineering*. 7, 360--365 (1999)
11. Lin Zongjian, Zhang Yonghong.: Measurement of information and uncertainty of remote sensing and GIS data. *Geomatics and Information Science of Wuhan University*. 31, 569--572 (2006)
12. Balboa R, Grzywacz N.: Power spectra and distribution of contrasts of natural images from different habitats. *Vision Research*. 43, 2527--2537 (2003)