

# Experimental Study on the Effects of Mechanical and Physical Characteristics on Walnut Shucking

Hongmei Xu, Shuiping Yan, Yapeng Bai

► **To cite this version:**

Hongmei Xu, Shuiping Yan, Yapeng Bai. Experimental Study on the Effects of Mechanical and Physical Characteristics on Walnut Shucking. Daoliang Li; Yingyi Chen. 5th Computer and Computing Technologies in Agriculture (CCTA), Oct 2011, Beijing, China. Springer, IFIP Advances in Information and Communication Technology, AICT-369, pp.594-602, 2012, Computer and Computing Technologies in Agriculture V. <10.1007/978-3-642-27278-3\_61>. <hal-01361036>

**HAL Id: hal-01361036**

**<https://hal.inria.fr/hal-01361036>**

Submitted on 6 Sep 2016

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# Experimental Study on the Effects of Mechanical and Physical Characteristics on Walnut Shucking

Hongmei Xu, Shuiping Yan , Yapeng Bai  
College of Engineering, Huazhong Agriculture University, Wuhan 430070, China  
(Email:xhm790912@163.com)

**Abstract.** The mechanical and physical characteristics have great impact on the shell shucking of walnut. Taking the shucking force as the evaluation indicator, the effects of mechanical and physical characteristics, which include the loading orientation, loading rate, moisture content and walnut partical size, on walnut shucking were investigated by means of single factor test. The results show that: 1) the loading orientation and loading rate affect the shucking force significantly, and the needed force is the minimum when the walnut is horizontally placed and loaded at the rate of 50mm/min; 2) the moisture content has significant effects on the shucking force, and with the increase of drying time, the moisture content of walnut decrease gradually, which results in the increases of the needed shucking force;3) the particle size has no great effect on the shucking force, but great difference in particle size usually corresponds to different walnut shucking force. In order to investigate the shucking technology and design the efficient sheller, it's highly significant to study on the mechanical and physical characteristics of walnut.

**Keywords:** Walnut, Shucking, Mechanical Characteristic, Physical Property

## 1 Introduction

Walnut is one of the four nuts in the world. In recent years, with the great increase of walnut yield, the walnut foods have developed in the direction of deep processing. However, a critical step for the deep processing of walnut is to shuck the shell and take the meat. Because of the irregular shape and smaller clearance between shell and kernel, it's very difficult for walnut to shuck the shell and take the meat<sup>[1]</sup>. Nowadays, because of the unreasonable force-applying forms, most walnut shellers used in domestic are of larger breaking rate and behave themselves with poor shucking quality<sup>[2, 3]</sup>.

Mechanical and physical characteristics can provide fundamental data for developing the sheller and realizing the effective separation of walnut shell and meat. In order to design the highly effective and low damage sheller, mechanical and physical characteristics of walnut must be first investigated.


Taking the dried leatheroid walnut as the research object, the compression test was conducted on the universal material testing machine. The effects of mechanical and physical characteristics, which include the loading orientation, loading rate, moisture content and walnut partical size, on the shucking force of walnut were investigated by

means of single factor test. The research results are of great significance for improving the working performance of walnut sheller and designing the new and high-efficiency shucking equipments.

## 2 Materials and Methods

### 2.1 Materials

The sold leatheroid walnut from Yunnan was selected as the specimen, and the experiment has been finished in the comprehensive laboratory of College of Engineering, Huazhong Agriculture University, in May 2011.

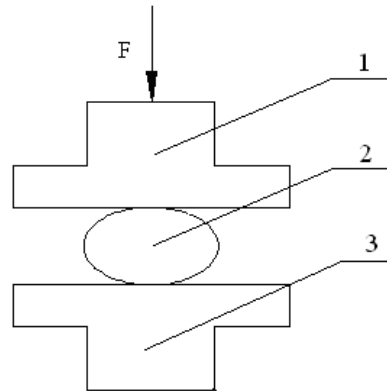

**Fig.1** Sketch of the loading device

1. Upper platen 2. Specimen 3. Bottom platen

### 2.2 Devices

The experiment was conducted on the universal material testing machine of RGT2000-10, and the loading rate varies from 0.01mm/min to 500mm/min. Fig.1 shows the sketch of the loading device. The pressure imposed on the walnut specimen by the plate-type pressure head is measured by the force transducer.

### 2.3 Methods

The experiment was conducted on the universal material testing machine, and the specimen was applied with the static load. In the beginning of the experiment, put the specimen on the bottom platen of the testing machine, and adjust the location of the upper platen to make sure it contacts with the specimen and imposes a compression force on the specimen. In order to determine the influence of the mechanical and

physical characteristics on walnut shucking, the single factor test was conducted to investigate the effects of the loading orientation, loading rate, moisture content and particle size on the walnut shucking force. Additionally, for each experimental condition, the experiment was repeated ten times to reduce the test tolerance, and the result is the mean value of 10 tests.

### 3 Results and discussion

#### 3.1 Analysis of the cracking process of walnut shell

##### 3.1.1 Cracking forms of walnut shell

Fig.2 shows the cracking forms of walnut shell when loaded in different orientations. The cracking forms of walnut shell are of two main types, namely, cracking longitudinally and cracking transversely. Because of the structural inhomogeneity and discontinuity in the sowed interface of walnut, it features low compression strength. When the walnut is horizontally placed and applied with a load, the stress concentration and longitudinal crack usually occur. The longitudinal crack propagates in the direction of sowed interface, and plays an important role in the walnut shucking. When the walnut is vertically placed and applied with a load, the cracking form is similar to that of walnut shell when it is horizontally placed. The crack propagates in the direction of sowed interface and behaves itself with definite direction. However, when the walnuts are placed on their sides, as shown in Fig.2 (b), and applied with a load, the transverse crack occurs, and the walnut cracks from the loading point out to its sideways. Furthermore, the extension direction of crack is vertical to the sowed interface<sup>[4]</sup>.



(a) Cracking longitudinally



(b) Cracking transversely

**Fig .2** Crack propagation of walnut shell

### 3.1.2 Cracking process of walnut shell

Fig.3 shows the relation curve between the loading force and deformation of walnut when it is horizontally placed and applied with a load. As shown in the figure, the relation curve deviates from the origin of coordinate system. The reason is that there is a certain clearance between the upper platen and the walnut specimen. Thus, the pressure maintains 0N until the upper platen contacts with the walnut specimen. The initial deformation is actually the clearance between the upper platen and the walnut specimen.

The cracking process of walnut shell mainly includes three stages, namely, elastic deformation, plastic deformation and sudden rupture. The elastic deformation mainly refers to the early loading stage, in which the pressure linearly increases with the deformation of walnut. Afterwards, with the increase of loading force, the elastic deformation goes hand in hand with plastic deformation. The plastic deformation mainly focuses in the later loading stage. However, when the loading force achieves the peak value for the first time, the walnut begins to crack and the force declines sharply. The peak value mentioned above mainly depends on the compressive strength of walnut, so it's also known as the walnut shucking force. Then, the walnut shell and meat is compressed together, and the required loading force increases again [5]. In the course of the experiment, in order to protect the testing machine, the experiment is called for a halt once the walnut begins to crack and the loading force achieves the maximum.

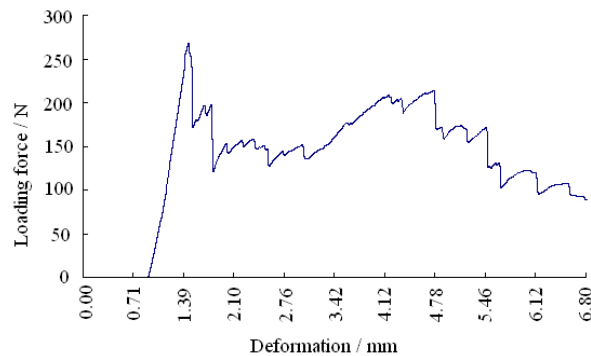


Fig.3 Relation curve between the loading force and deformation of walnut

## 3.2 Analysis of the influence factors of walnut cracking

### 3.2.1 Effects of loading orientation on walnut cracking

Select thirty medium-size walnuts as the specimen, which is coincided with each other in the size and moisture content. Divide the walnuts into three groups, and each group contains ten walnuts. In the course of the experiment, the ten walnuts in group 1 are all horizontally placed as shown in Fig. 4(a). The walnuts in group 2 and group 3 are placed on their sides and vertically placed respectively. Compress the three groups


of specimens at the loading rate of 10mm/min, and don't cease the experiment until the walnut shell begins to crack, which results in the great reduction of pressure. Record the peak value of the pressure, and regard it as the walnut shucking force.



(a) Walnut is horizontally placed (b) Walnut is placed on its side (c) Walnut is vertically placed

**Fig. 4** Loading orientation of walnut

Fig.5 shows the testing results of the walnut shucking force when the walnuts are applied with loads in different directions. As shown in the figure, the needed loads are clearly different when the walnuts are applied with loads in different directions. When the walnut is horizontally placed, the needed load is the minimum, which is equal to 195.69N, and then is the needed load when the walnut is placed on its sides. The needed load is the maximum when the walnut is vertically placed. Variance analysis was conducted for the testing results of walnut shucking force, and the corresponding F-statistic is equal to 12.73, which is greater than the critical value  $F_{\alpha}(2, 27)$  ( $\alpha=0.05$ ). The variance analysis results are consistent with the testing results. It is, therefore, believed that the loading orientation has great impact on the walnut shucking force.

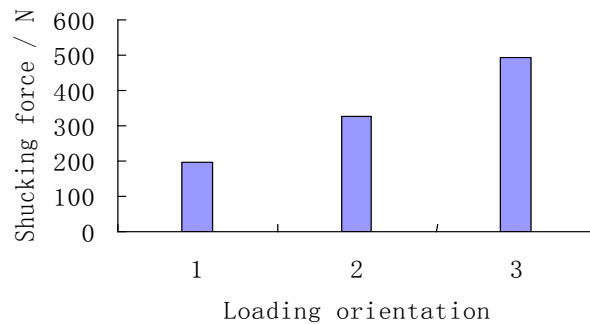

**Fig.5** Shucking force of walnut with different loading orientation


- 1: Walnut is horizontally placed
- 2: Walnut is placed on its side
- 3: Walnut is vertically placed

### 3.2.2 Effects of loading rate on walnut cracking

Select thirty medium-size walnuts as the specimen, which is coincided with each other in the size and moisture content. Divide the walnuts into three groups, and each group contains ten walnuts. In the course of the experiment, the thirty walnuts are all

horizontally placed. Compress the three groups of specimens at the loading rate of 10mm/min, 30mm/min and 50mm/min respectively.

Fig.6 shows the testing results of the walnut shucking force when the walnuts are compressed at different loading rates. As shown in the figure, the needed shucking forces are different when the walnuts are compressed at different loading rates. When the walnut is compressed at the loading rate of 50mm/min, the needed load is the minimum, which is equal to 114.04N, and then is the loading rate of 10mm/min. The needed load is the maximum when the walnut is compressed at the loading rate of 30mm/min. Variance analysis was conducted for the testing results of walnut shucking force when the walnuts are compressed at different loading rates, and the corresponding F-statistic is equal to 8.46, which is greater than the critical value  $F_{\alpha}(2, 27)$  ( $\alpha=0.05$ ). So it can be concluded that the loading rate affects the walnut shucking force significantly.

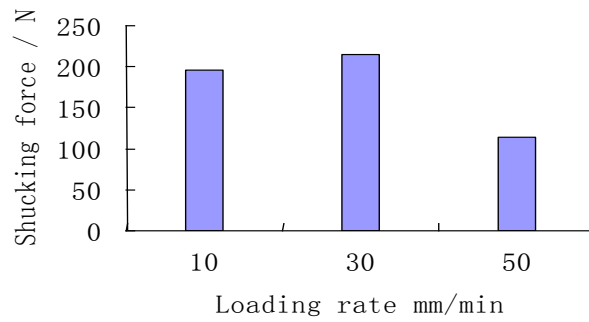


**Fig.6** Shucking force of walnut with different loading rate

### 3.2.3 Effects of particle size on walnut cracking

Select thirty walnuts as the specimen, which is coincided with each other in the moisture content. Divide the walnuts into three groups, and each group contains ten walnuts. The ten walnuts in group 1 with smaller size ranges from 23mm to 27mm in height when they are horizontally placed. The ten walnuts in group 2 are of medium size, and range from 28mm to 32mm in height when they are horizontally placed. The ten walnuts in group 3 are the biggest ones, and range from 33mm to 37mm in height when they are horizontally placed. In the course of the experiment, the thirty walnuts are all horizontally placed, and compressed at the loading rate of 10mm/min.

Fig.7 shows the testing results of the shucking force of walnut with different particle size. For the walnuts with different particle size, the needed loads are different, but the difference is not large. The needed shucking force of the medium-size walnuts is the minimum, which is equal to 166.47N, and then is the smaller ones. The needed shucking force of the large-size walnuts is the maximum. Variance analysis was conducted for the testing results of the shucking force of walnut with different particle size, and the corresponding F-statistic is equal to 1.43, which is less than the critical value  $F_{\alpha}(2, 27)$  ( $\alpha=0.05$ ). It can be concluded that particle size has no great effect on the walnut shucking force.

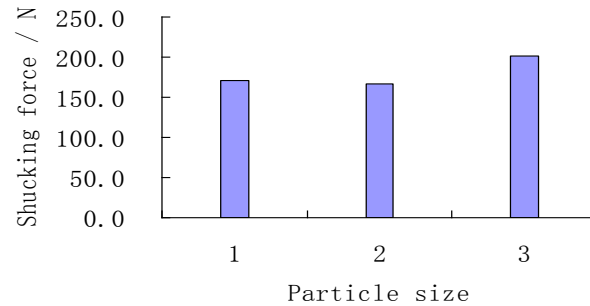

**Fig.7** Shucking force of walnut with different particle size


- 1: Walnut is of larger size
- 2: Walnut is of medium size
- 3: Walnut is of smaller size

### 3.2.4 Effects of moisture content on walnut cracking

Select thirty medium-size walnuts as the specimen, which is coincided with each other in the particle size. Divide the walnuts into three groups, and each group contains ten walnuts. In order to investigate the effect of the moisture content on the walnut shucking force, the walnuts must be pretreated before the compression test. The drying experiment is one of the most important preprocessing methods, which is usually used to control the moisture content of the samples. In this research, the drying experiments were conducted for three groups of walnut specimens, and the corresponding drying time is 0h, 1h and 2h respectively. Afterwards, the walnuts are all horizontally placed, and compressed at the loading rate of 10mm/min.

Fig.8 shows the testing results of the shucking force of walnut with different drying time and moisture content. As shown in the figure, different drying time corresponds to different walnut shucking force. When the drying time is 0h, the needed shucking force is the minimum, which is equal to 114.49N, and then is the walnuts with the drying time of 1h. The needed shucking force of the walnuts with the drying time of 2h is the maximum. It can be seen that the moisture content of walnuts decreases with the increase of drying time. As a result, the needed shucking force increases which makes walnut shucking more difficult. Variance analysis was conducted for the testing results of the shucking force of walnuts with different moisture content, and the corresponding F-statistic is equal to 49.23, which is greater than the critical value  $F_{\alpha}(2, 27)$  ( $\alpha=0.05$ ). Therefore, it can be concluded that the drying time and moisture content has great effects on the walnut shucking force.



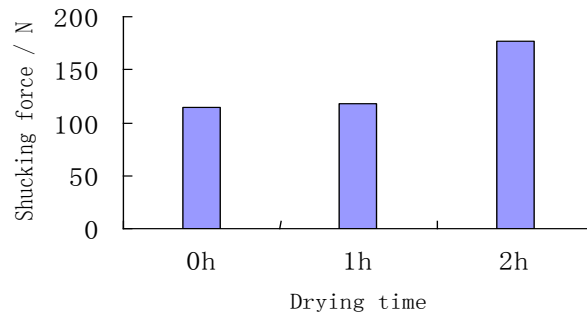

**Fig.8** Shucking force of walnut with different moisture content

### 3 Conclusions

Take the shucking force as the evaluation indicator, and the effects of the loading orientation, loading rate, moisture content and walnut particle size on walnut shucking were investigated by means of single factor test. The conclusions can be described as follows:

(1) Loading orientation has great impact on the walnut shucking force. When the walnuts are horizontally placed, the needed shucking force is the minimum, and then is the walnuts placed on their side. The needed shucking force of the walnuts vertically placed is the maximum.

(2) Loading rate affects the walnut shucking force significantly. When the walnut is compressed at the loading rate of 50mm/min, the needed shucking force is the minimum, and then is the loading rate of 10mm/min. The needed force is the maximum when the walnuts are compressed at the loading rate of 30mm/min.

(3) Moisture content has significant effects on the shucking force, and with the extension of drying time, the moisture content of walnut decrease gradually, which results in the increases of the needed shucking force.

(4) Particle size has no great effect on the shucking force, but great difference in particle size usually corresponds to different walnut shucking force.

(5) The cracking forms of walnut shell are of two main types, namely, cracking longitudinally and cracking transversely. When the walnuts are horizontally and vertically placed and applied with a load, the longitudinal crack usually occurs. The transverse crack occurs only when the walnuts are placed on their sides.

### References

1. Jianxin S., Haijun Z., Dongjun X. Technology for breaking walnut shell based on finite element analysis. Transactions of the CSAE, vol.21, 3, pp .185-188 (2005)
2. Yuande D., Jianxin S., Yuanyuan Q. Effect of the shell-breaking and kernel-taking about walnut for various shell-breaking methods. Academic Periodical of Farm Products Processing, vol. 9, pp.4-9(2007)

3. Jianxin S., Dongjun X. Discussions on the status and problems of the walnut shellers at home and abroad. *Agriculture machinery of Xinjiang*, vol.6, pp.29-32(2001)
4. Yichuan H., Jianxin S. Analysis and Experiment on Mechanical Characteristic of Walnut Shell. *Journal of Xinjiang Agricultural University*, vol.32, 6, pp.70-75(2009)
5. Lihua Z., Wen Z., Wen Q., Mingxia L. Mechanical Characteristics of Peanut Cracking. *Food Science*, vol.31, 13, pp.:52-55(2010)

### **Acknowledgement**

This research was supported by Student's Science & Technology Innovation Fund of Huazhong Agricultural University "Research on the prediction of the acoustic performance for vehicle-use sound packages based on FE-SEA hybrid model" under grant Nos. 11028

### **Biography**

**Hongmei Xu** received the B.S and M.S degree from Huazhong Agriculture University, and the Ph.D. degree from Zhejiang University, in 2001, 2004, and 2008, respectively. She is currently the lecturer of the Department of Engineering and Technology at Huazhong Agricultural University. Her primary professional interests lie in digital simulation and analysis of the NVH performance for automobiles, modern signal process, and agricultural product processing technology.