

Analysis of the Rigidity of Arc Flexible Hinge with Different Geometrical Parameters

Hongjiang Chen

► **To cite this version:**

Hongjiang Chen. Analysis of the Rigidity of Arc Flexible Hinge with Different Geometrical Parameters. Daoliang Li; Yingyi Chen. 5th Computer and Computing Technologies in Agriculture (CCTA), Oct 2011, Beijing, China. Springer, IFIP Advances in Information and Communication Technology, AICT-370 (Part III), pp.195-200, 2012, Computer and Computing Technologies in Agriculture V. <10.1007/978-3-642-27275-2_21>. <hal-01361138>

HAL Id: hal-01361138

<https://hal.inria.fr/hal-01361138>

Submitted on 6 Sep 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Analysis of the Rigidity of Arc Flexible Hinge with Different Geometrical Parameters

Hongjiang Chen¹

¹School of Mechanical and Electrical Engineer, Jiangxi Science & Technology Normal University, Nanchang, Jiangxi 330013, P.R.China
{Hongjiang Chen, hongjiangc@163.com}

Abstract. Flexible hinges are widely used in micro robotic. Its rigidity directly influences an organization's terminal localization. Its actual structure geometry size cannot satisfy the theoretical analysis completely in a theoretical supposition condition. In this paper, we analyzed the rotation rigidity of arc flexible hinges in different parameters using finite element software ANSYS. The errors are discovered and compared with theoretical result. An analysis of changes of parameters on the performance of arc flexible hinge was carried out, though the graph of the flexible hinge's parameters and its performance. The key manufacture parameters that affect the performance of arc flexible hinge the most and rules of design are given, which can provide directions of design precision for the flexible hinge.

Keywords: arc flexure hinge, finite element analysis, rigidity

1 Introduction

Flexible hinge have some characteristics, such as small volume, without rubs, ceaseless, good rigidity and high sensitivity. With microcomputer electrical system series (MEMS) technical rapidly expanding, flexible hinge are widely applied in the displacement which requests small angular and high-precision rotation, such as gyroscopes, accelerometers, precision instruments and so on. It has broad application prospects in the micron level domain.

The common flexible hinge is in two kinds: beam-shape flexible hinge and arc-shaped flexible hinge. The beam-shaped flexible hinge has a big slewing area, but the movement precision is bad. The arc-shaped flexible hinge's movement precision is high, but the slewing range is relatively small [1]. In order to take into account the movement precision and scope, the following several rotation flexible hinges have been generated: parabolic flexure hinge, an arc flexure hinge and a hyperbola-shaped flexure hinge, etc [2].The properties of flexible hinges are rigidity, precision and

¹ Please note that the LNCS Editorial assumes that all authors have used the western naming convention, with given names preceding surnames. This determines the structure of the names in the running heads and the author index.

stress characteristic, etc. The rigidity performance reflects the stress ability and also manifests movement to a vice-flexible degree. In 1965, Paros et al [3] announced his design development of the circular flexible hinge for the first time, and gave the rigidity formula. Smith et al used the similar method to obtain an elliptic flexible hinge mechanics expression [4]. Nicolae Lodonitu inferred the parabola and the hyperbolic flexible hinge's rigidity formula [5]. Wei Xu and Tim King analyzed the rectangular and ellipse flexible hinge's rigidity and rotation precision using the finite element method [6].

In this paper the arc flexible hinge stiffness to different geometrical parameters is analyzed with software ANSYS10.0. Compared with results of theoretical analysis and finite element analysis (FEA), the errors are analyzed. Through the graph of the flexible hinge parameters and its performance, an analysis of changes of parameters on the performance of the arc flexible hinge was carried out. The key manufacture parameters that affect the performances of an arc flexible hinge the most and rules of design are given, which can give directions of design precision for the flexible hinge.

2 Rigidity formula of the arc flexible hinge

An arc flexible hinge, as shown in Figure 1, is a particular type of flexure that consists of a necked down section. Parameters t , h , b are flexible hinge's smallest thickness, height and width, respectively, parameter R is the radius of arc, and θ_m is the centre angle of arc.

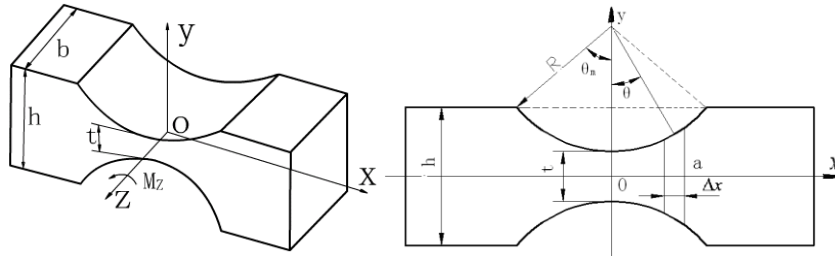


Fig. 1. Model of arc flexible hinge

As shown in Figure 1, the infinitesimal is intercepted in the abscissa axis that is $\Delta x = \Delta(\rho \sin \theta)$. To begin, the infinitesimal section is vertical to the abscissa axis. The flexible hinge's angular deformation α_z is generated under torque M_z as given in Eq.1 [1].

$$\alpha_z = \int_{-R \sin \theta_m}^{R \sin \theta_m} \frac{M_z(x)}{EI_z(x)} dx = \frac{12M_z}{EbR^2} \int_{-\theta_m}^{\theta_m} \frac{\cos \theta}{\left(\frac{t}{R} + 2 - 2 \cos \theta\right)^3} d\theta \quad (1)$$

$$f_1 = \int_{-\theta_m}^{\theta_m} \frac{\cos\theta}{\left(\frac{t}{R} + 2 - 2\cos\theta\right)^3} d\theta = \frac{8\gamma^4 (2\gamma + 1) \tan \frac{\theta_m}{2}}{(4\gamma + 1)^2 [1 + (4\gamma + 1) \tan^2 \frac{\theta_m}{2}]^2} + \frac{4\gamma^3 (6\gamma^3 + 3\gamma + 1) \tan \frac{\theta_m}{2}}{(4\gamma + 1)^2 [1 + (4\gamma + 1) \tan^2 \frac{\theta_m}{2}]} + \frac{12\gamma^4 (2\gamma + 1)}{(4\gamma + 1)^{5/2}} \arctan(\sqrt{4\gamma + 1} \tan \frac{\theta_m}{2}) \quad (2)$$

Where the parameters r can be expressed by Eq.3.

$$\gamma = \frac{R}{t} \quad (3)$$

The rotation rigidity formula of arc flexible hinge is given by Eq.4.

$$K_1 = \frac{M_Z}{\alpha_Z} = \frac{EbR^2}{12f_1} \quad (4)$$

3 FEA model of arc flexible hinge

ANSYS has some characteristics that the general finite element analysis technology, powerful computing, and reliable result. The arc flexible hinge's basic structure size is $b=10\text{mm}$, $t=1\text{mm}$, $R=2.5\text{mm}$, $\theta_m=90^\circ$. The material is Spring steel, $E=200\text{GPa}$, $\nu = 0.3$.

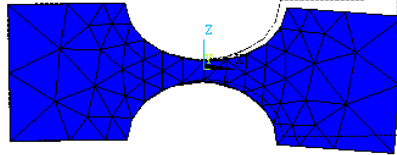


Fig. 2. FEA model of arc flexure hinge

The arc flexible hinge FEA model is shown in Figure 2. The model left end surface is restrained completely; the right end surface exerts bending moment $M = 0.1\text{N.m}$. The special node 1 of the grid model right end surface represents the output displacement. The unit type chooses 3-D the entity SOLID92 unit model, the entire model uses smart size to free mesh. The FEA model and the output displacement have been obtained with changing arc flexible hinge's parameters E , b , t and R as well as θ_m .

4 Performance analysis of stiffness

The theoretical calculation and FEA rotational stiffness are obtained through changing arc flexure hinge parameters E , b , t and R as well as θ_m , as shown in Figure 3 to 7. The theoretical value of arc flexible hinge stiffness is simplified theory. FEA is FEA value of arc flexible hinge stiffness.




Fig. 3. Comparison of FEA value and the theoretical value of flexure hinge with changing E

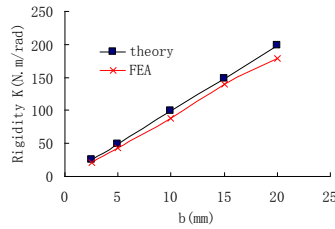


Fig. 4. Comparison of FEA value and the theoretical value of flexure hinge with changing width b




Fig. 5. Comparison of FEA value and the theoretical value of flexure hinge with changing thickness t




Fig. 6. Comparison of FEA value and the theoretical value of flexure hinge with changing radius R

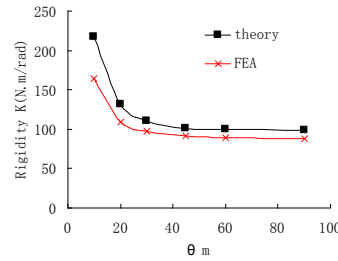


Fig. 7. Comparison of FEA value and the theoretical value of flexure hinge with changing centre angle θ_m

From Eq.1, Eq.2 and Figures 3 to 7 the following conclusions can be observed.

(1) From Figures 3 and 4 it can be observed that the rotation stiffness is a linearly increasing relation with material young's modulus E and width b. The theoretical value is bigger than the FEA value. When E and b are smaller, the FEA value and the theoretical value are closer.

(2) From Figure 5 it can be observed that the rotation of the stiffness FEA value and the theoretical value is a curve increasing with thickness t, and the speed-up is getting quicker and quicker. When t is bigger, the difference of the theoretical value and the FEA value is bigger. When $t < 2\text{mm}$, the FEA value and the theoretical value are close.

(3) From Figure 6 it can be observed that the relation of rotation rigidity and radius R is a decreasing curve, and the rate of reduced scope is gradually decreased. When $R > 2\text{mm}$, the FEA value and the theoretical value are closer.

(4) From Figure 7 it can be observed that the relation of rotation rigidity and centre angle θ_m is a decreasing curve, but the decreasing scope is small. The theoretical value is bigger than the FEA value. When $\theta_m > 20^\circ$ the FEA value and the theoretical value are closer.

From Figures 3 to 7 it can be observed that the influence of flexure hinge's parameter to its rotation stiffness is: the influence of thickness t is biggest, followed by radius R, centre angle θ_m , width b and E.

The theoretical value and the FEA value of an arc flexible hinge rotation rigidity is not equal, even if it has a big differential value. The reasons are:

(1) The flexible hinge theoretical model that is established using materials mechanics' bending strain theory is built on the basis of certain assumptions.

(2) From Figure 2 it can be observed that the FEA model not only has the displacement in the y axis direction, but also has the displacement change on the z axis direction, when the torque M_z exerted on the z axis for the model. In other words, the flexible hinge not only has the bending strain, but also will have the shearing force to cause upward deformation. Under certain design parameters, the flexible hinge's theory and FEA solution achieve a good match.

5 Conclusions

The different design parameters to the flexible hinge rotation rigidity influence and the linear relationship are obtained by comparing the rotation rigidity theory solution and the finite element analysis. It can be observed that the influence of flexible hinge's parameter to its rotation stiffness is: the influence of thickness t is biggest, followed by radius R , centre angle θ_m , width b and E . The reasons that the theoretical value and the FEA value of an arc flexible hinge's rotation rigidity is not equal is that the flexible hinge not only has the bending strain, but also will have the shearing force to cause upward deformation. It is helpful to further analyze the movement of the mechanical deformation mechanism, using the finite element technology to simulate the flexible hinge performance.

Acknowledgments. This research is financially supported by the Hangzhou Binteng Technology Co.,LTD, Hangzhou Province, China.

References

- 1 Zuo X Y, Liu X M, Calculation and analysis of rotational stiffness for three types of flexure hinges. Chinese Journal of Scientific Instrument [J], Vol.27 (2006), p. 1725-1728.
- 2 Lobontiu N, Garcia E, Analytical model of displacement amplification and stiffness optimization for a class of flexure-based compliant mechanisms. Computer & Structures, Vol.81 (2003), p. 2797-2801.
- 3 Paros J M, WEISIBORD L, How to design flexure hinge [M].Machine Design, Vol.37 (1965), p.151-157.
- 4 Smith T S, Badami V G, Arc flexure hinges [J]. Review Scientific instruments, Vol.68 (1997), p. 1474-1483.
- 5 Lobontiu N, Paine J S N, Corner-filletted flexure hinges[J]. Journal of Mechanical Design, Vol. 123 (2001), p. 346-352.
- 6 Xu W, King T G, Flexure hinges for piezo-actuator displacement amplifiers: flexibility, accuracy and stress considerations [J]. Precision Engineering, Vol. 19(2002),p.4-10.
- 7 H.Abdellatif, F.Benimeli, B.Heimann, M.Grotjahn, Direct identification of dynamic parameters for parallel manipulators, in: Presented at International Conference on Mechatronics and Robotics 2004, MechRob2004, Aachen, Germany, 2004.