



**HAL**  
open science

## Safety Message Generation Rate Adaptation in LTE-based Vehicular Networks

Hossein Soleimani, Thomas Begin, Azzedine Boukerche

► **To cite this version:**

Hossein Soleimani, Thomas Begin, Azzedine Boukerche. Safety Message Generation Rate Adaptation in LTE-based Vehicular Networks. *Computer Networks*, 2017, pp.11. 10.1016/j.comnet.2017.04.054 . hal-01549606

**HAL Id: hal-01549606**

**<https://inria.hal.science/hal-01549606>**

Submitted on 17 Jul 2017

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Safety Message Generation Rate Adaptation in LTE-based Vehicular Networks

Hossein Soleimani

*School of Electrical Engineering and Computer Science, University of Ottawa, Ottawa, Canada*

Thomas Begin

*Université Lyon 1, ENS Lyon, Inria, CNRS, UMR 5668, France*

*School of Electrical Engineering and Computer Science, University of Ottawa, Ottawa, Canada*

Azzedine Boukerche

*School of Electrical Engineering and Computer Science, University of Ottawa, Ottawa, Canada*

---

## Abstract

Long Term Evolution (LTE) appears to be a practical and economical alternative to IEEE 802.11p for deploying rapidly vehicular safety applications. Vehicles are periodically broadcasting messages, aka beacons, containing their location and speed. Ideally, vehicles should accurately know the location of surrounding vehicles, and possibly, have a same level of precision regardless of their speed.

The contributions of this paper are twofold. First, we propose an efficient solution to adapt the generation rate of safety messages of vehicles so that every single of them experiences the same level of location precision. This fairness is attained using an analytical model, based on a queueing model that approximates the level of precision for each vehicle based on their motion speed and their generation rate of safety messages. Second, we present a solution to dynamically discover the minimum number of resources, i.e. PRBs, that should be allocated by LTE so as to meet a certain level of location precision for all vehicles. Our numerical results show the effectiveness of our two proposed solutions.

*Keywords:* LTE, safety application, beacon, vehicular, adaptation, performance

*2010 MSC:* 00-01, 99-00

---

## 1. Introduction

The automotive industry is expected to undergo major changes in the next years. In this regard, connected cars are a key component for the development of Intelligent Transportation Systems. IEEE 802.11p is a refined version of the IEEE 802.11 standard to allow wireless communications in vehicular environments. Despite significant technical improvements (e.g. priority, fewer overheads) to better fit the dynamic context of vehicular networks, and major standardization advancements, IEEE 802.11p has not yet been deployed in the real world - though there are a few pilot projects [? ?]. Among the reasons hindering its deployment are performance issues related to its scalability, as well as concerns on possible unbounded delay for transmitting messages [?]. In the same time, researchers and engineers have gained interest in the possibility of using the already deployed cellular networks for vehicular applications. LTE (Long-Term Evolution) is one of the most prominent standard for mobile phones and terminals, providing high data rate, low latency, and large coverage area. Because of uncertain delays in deploying IEEE 802.11p, LTE appears to be a practical and economical alternative to deploying rapidly certain vehicular applications [?].

Vehicular applications are typically categorized into three groups [?]: safety, traffic efficiency, and infotainment applications. Traffic efficiency applications aim at reducing travel time and mitigating the effects of traffic congestion. Infotainment applications comprise classical Internet applications, as well as other emerging services. Safety applications seek to reduce the number of road fatalities by having some form of communication between neighboring vehicles. According to the ETSI (European Telecommunications Standards Institute), safety application communications may involve two types of messages: event-triggered and periodic messages [?]. The former are generated in response to a hazardous event encountered on the road, and aims at notifying neighboring vehicles of a specific hazard. On the other hand, periodic safety messages, aka cooperative awareness messages or beacons, are regularly broadcasted by a vehicle to its neighbors. These messages are typically short, and contain only a small set of measured metrics such as the location and

speed of the vehicle. However, their knowledge can provide vehicles with a better understanding of the other vehicles currently cruising in their environment. In our work, we focus on these types of messages.

When dealing with safety applications, knowing accurately the location of surrounding vehicles is obviously a crucial matter. The actual degree of precision depends on three main factors: (i) The accuracy of the measurement revealing the vehicle coordinate, which largely depends on the quality of the GPS device; (ii) The freshness of the measurement, which amounts to the length of time since the measurement was taken; (iii) The speed of the vehicle whose coordinate was measured. Assuming the GPS device provides accurate measurements, and because the speed of vehicle remains a human decision, we study the only controllable parameter, namely the freshness of the measurement. Clearly, even with no error on the location measurement, the accuracy of the location of a vehicle decays at the pace of the product: freshness  $\times$  speed. Hence, no matter the quality of the GPS measurements, faster vehicles tend to experience larger levels of errors. This unfairness seems rather unsuitable for safety applications. A more desirable situation would be that all vehicles experience a similar level of precision on their location while the average location precision of all vehicles is not deteriorated.

We propose a solution to efficiently adapt the generation rate of safety messages based on the vehicles speed so as to increase the fairness among the different vehicles. The general idea is simple: decreasing the message generation rate of the vehicles undergoing better location precision while letting other vehicles with worse precision sending their measurements at higher rates. However, deriving the current location precision for each vehicle is not straightforward. Indeed it is a function of both the end-to-end delay between the vehicle taking the GPS measurement and the vehicle receiving this data, and the rate at which periodic safety messages are generated. We estimate the location precision of each vehicle using an analytical model that captures the competing access of vehicles to the resources of the LTE network as specified by the LTE scheduler. The solution to the model returns the rate at which safety messages are transmitted and received based on the current number of vehicles in the LTE cell, and on the rate at which periodic safety messages are gen-

erated. Our proposed model is conceptually simple, computationally scalable with the number of vehicles, and delivers, in general, accurate results. Together with the GPS measurements and the speed of vehicles, our model provides the missing piece  
65 in order to evaluate the overall precision (or committed error) on the neighboring vehicles location.

Another contribution of this paper is to help LTE operator determining how many resources from LTE should be allocated so as to meet some guarantees regarding the location precision experienced by the vehicles. Of course the amount of required re-  
70 sources highly depends on the current number of vehicles and on their speed. We propose a simple approach to address this type of capacity planning issue.

The rest of this paper is organized as follows. Section ?? presents an overview of the related works. The LTE architecture and the necessary steps in the transmission of safety message are described in Section ?. In Section ?, we detail our solution  
75 to adapt the generation rate of safely messages in order to attain fairness in location precision for all vehicles. Section ? presents a solution to discover the minimum number of required LTE resources to meet a given level of location precision. Section ? concludes this paper.

## 2. Related works

80 Several studies have introduced and discussed the idea of using the cellular network (e.g. LTE) to run safety applications for vehicular networks [? ? ? ? ? ]. A case in point is the technical report [? ] that describes a framework for Cooperative Intelligent Transport Systems using mobile cellular networks. The report provides a preliminary performance evaluation of vehicular networks under different cellu-  
85 lar network technologies, namely GSM/EDGE, UMTS, and LTE, aka 2G, 3G and 4G. It also includes the performance results obtained by the CoCarX project [? ] that aims at characterizing the behavior of vehicular safety applications when they are run with LTE. Overall, the results of [? ] demonstrate the feasibility of using LTE to run safety applications in vehicular networks. However, the authors discuss poten-  
90 tial performance issues (e.g. long delays) when the total number of vehicles (or the

generation rate of safety messages) becomes too large. Hameed and Filali provided a comparative study of LTE and IEEE 802.11p [?] for vehicular networks. Based on their results, the authors conclude that, overall, LTE outperforms the IEEE 802.11p standard as the former provides higher network capacity and a better mobility support. However, they, too, pointed out that the average transmission delay of safety messages can significantly increase if the load is facing a high level of load. Finally, Park et al. [?] presented a study that demonstrates the feasibility of using smartphones to run vehicular networks. Their experiments, containing measurements about latency and reliability, were made using LTE network in three different countries. In the same work, the authors also evaluate the scalability of the smartphone-based networks using a discrete event simulator [?]. Their results corroborate the aforementioned performance issues that the transmission safety messages may be significantly hindered when the total number of transmitting vehicles is becoming too large.

Overall, these latter works demonstrated the proof of concept of using LTE to run vehicular networks, while discussing potential performance degradation, possibly compromising the behavior of safety applications, when the network load is too high.

To address an oversized level of load resulting from too many vehicles willing to access the LTE resources, there are mostly two main approaches: offloading the network through clustering of vehicles, and adapting the message generation rate.

The main idea behind offloading is to gather neighbor vehicles into clusters, and letting only one vehicle, known as the cluster head, communicate with the LTE base station. Other members of the cluster transmit their messages to the cluster head that is responsible to forward them through LTE network. By doing so, the number of accesses to LTE can be significantly decreased, and so are the congestion effects. Typically, the communication between the vehicles and the cluster head may be done through IEEE 802.11p, whereas the cluster head forwards the corresponding messages using the LTE network. Several clustering algorithms have been proposed to build those clusters of vehicles [? ? ?].

A different approach to tame the effects of network congestion is to adapt the

rate at which safety messages are generated in Vehicular Adhoc NETWORKS (VANET). Schmidt et al. [?] proposed a situation-adaptive solution where the rate at which safety message are generated is a function of the vehicle speed as well as the number and speed of vehicles in its surrounding environment. Wang et al. proposed in [?] a centralized method to determine an adequate generate rate of safety messages. Their method is based on a metric combining the current rate of safety packet and the currently observed delay experienced by messages. Feng et al. [?] proposed another solution to adapt the generation rate of safety messages. Basically, their solution monitors the network performance, and whenever the performance deterioration exceeds a certain threshold, it adjusts message rates by lowering their values. Liu et al. proposed another similar rate adaptation scheme [?] that mostly depends on the estimated utilization of the cellular network resource by sensing the channel busy ratio. Then, they adjust the pace of safety messages accordingly. Zemouri et al. [?] proposed another way of discovering an adequate generation rate of safety messages based on a search algorithm. The idea is to iteratively adjust the generation rate in regards to the measured current collision rate and to the channel busy ratio. Finally, Egea-Lopez and Marino modeled the channel congestion with a Network Utility Maximization problem in [?]. They were able to find an algorithm to set the safety message generation rate by solving (the dual of) the NUM problem using a simple scaled gradient projection algorithm.

Despite the vast number of aforementioned works dealing with adapting the rate of safety messages, they were all designed for the case of vehicular beaconing in Vehicular Adhoc Networks, and their applicability to handle the case of cellular networks such as LTE is not clear. Moreover, the overwhelming majority of these solutions, if not all, rely on a control approach with a feedback loop whose actions depend on observed performance. In fact, these solutions first attempt to assess the current level of performance experienced by the network using metrics related to latency, delays, losses and channel busy ratio. If the performance level is viewed as too low, then they react to these observations by re-adjusting the rate at which safety message are generated. Obviously, such methods heavily rely on the availability of measurements, which must be collected, processed, transferred and analyzed. Con-

versely, in this paper, we propose a much simpler solution which does not need any performance measurements. It is based on an analytical model, to forecast the expected performance experienced by the safety messages. Moreover, the previous works did not focus on the fairness issue. They just tried to improve the location precision of vehicles regardless of their speed, hence, their approaches lead to different location precision for vehicles. Finally, we did not find any work which address the capacity planning in order to determine the minimum required resources to guarantee a specific level of location precision.

### 3. LTE principles for transmitting safety messages

We now introduce the LTE principles involved in the transmission of a safety message, starting from its generation from a source vehicle up to its reception by neighboring destination vehicles.

#### 3.1. LTE architecture

LTE is an infrastructure-based network whose architecture consists of two parts: the access network and the core network as illustrated by Figure ???. The access network includes User Equipments (UEs) and base stations, which are referred to as evolved NodeBs (eNBs). On the other hand, the core network, which is typically a classical IP wired network, comprises different types of gateways such as Serving Gateway (SGW) and Packet Data Network Gateway (PGW) as well as a server to process the safety messages. In the case of a vehicular network relying on LTE, the UEs are the vehicles, and safety messages are sent from vehicles up to the server located in the core network, before being sent back by eNB to the neighbor vehicles. During their journey, safety messages will experience several delays. However, given the usually oversized core networks, the bottleneck causing most of the delays is likely to be the access part. Therefore, in our work, we will focus only on the access part in order to evaluate the impact of LTE on the coordinates measurements freshness.

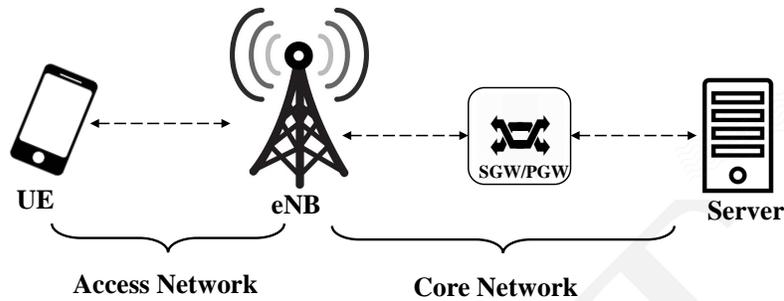


Figure 1: Simplified LTE architecture.

### 3.2. LTE protocol stack

180 We now describe the main protocols and components that are involved for the transmission of a safety message from a UE to an eNodeB. At the physical layer, LTE uses the modulation format Orthogonal Frequency-Division Multiplexing (OFDM). In a nutshell, the time domain is divided into 10 ms frames, and each frame consists of 10 slots of 1 ms. In the frequency domain, the total bandwidth is divided into sub-carriers of 15 KHz each. 12 contiguous sub-carriers for a duration of one time slot is called Physical Resource Block (PRB). Figure ?? illustrates a PRB, corresponding to the smallest resource unit, aka element, that can be allocated to a UE.

The main function of the next layer, namely Medium Access Control level (MAC), is the scheduler. Its goal is to share the available PRBs resources among the current 190 UEs. There are various strategies of assigning the resources depending on which performance parameters to optimize (e.g. throughput, fairness, QoS). In LTE, the scheduler assignments may take into account several metrics such as the channel condition of each UE, user priority, as well as other QoS parameters. From a practical viewpoint, unlike other technologies such as IEEE 802.11p, the LTE scheduler is centralized and implemented within the eNBs. The allocation scheme of PRBs is renewed every Transmission Time Interval (TTI). Finally, above the physical and MAC 195 layers, the two protocols Radio Link Control (RLC) and Packet Data Convergence

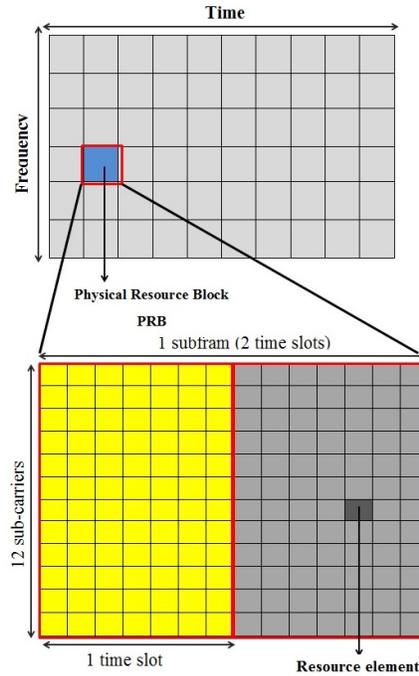


Figure 2: Physical Resource Block (PRB) within LTE.

Control (PDCP) are responsible for tasks such as header compression/decompression of IP packets, delivery of upper layer PDUs at lower layers, segmentation, and re-assembly, etc.

### 3.3. Transmitting safety messages

As proposed by [? ], the safety message transmissions, illustrated by Figure ??, work as follows. On the uplink side, each vehicle generates periodic safety messages at a given rate. These messages contain the vehicle current coordinate and speed. Each safety message is then fitted in an IP packet, and passes through the LTE protocol stack. The PDCP and RLC layer headers are added to the packet, and the packet is queued at the MAC layer waiting for a scheduler assignment. Once a PRB has been assigned to the vehicle, the packet is transmitted and received at eNB. Note that because of the very short size of safety messages, we assume that a single PRB is enough to complete their transmission. The packet encapsulating the safety

message is then conveyed through the core network until it reaches the adequate server that processes its content. As for the downlink, the server typically aggregates the data received from multiple vehicles into a single packet, and sends it back to the eNB. Then, the eNB broadcasts the corresponding message into the cell using the evolved Multicast Broadcast Multimedia Service (eMBMS). As a result, each vehicle within the cell receives the whole information, but retains only the information regarding other vehicles in its vicinity, aka awareness area, filtering other irrelevant information.

As opposed to the downlink transmission, vehicles may have to compete to access LTE resource on the uplink. Therefore, additional delays, due to waiting phenomena, are likely to occur only on this direction. Hence, in our paper, we precisely study the performance attained by the vehicles on the uplink direction of the access network of LTE.

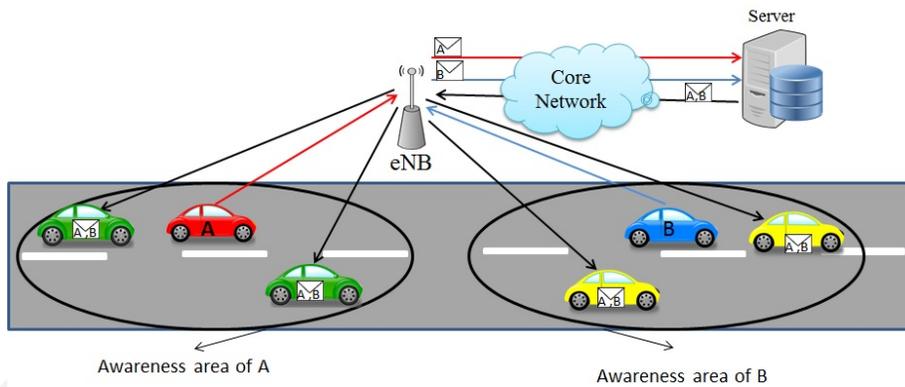


Figure 3: LTE transmission of safety messages.

### 3.4. Location precision and safety message periods

We now discuss the relations between the generation, transmission, and reception rates of safety messages and the precision on the vehicle location. Let denote by  $T_{g_i}$ ,  $T_{t_i}$  and  $T_{r_i}$  the corresponding periods for the message generation, transmission and reception of vehicle  $i$ , respectively. Note that, for the sake of simplicity, we

temporarily assume that all vehicles generate safety messages at the same rate so  
 230 that we can drop the index  $i$ . The rate of at which safety messages are effectively  
 transmitted over the wireless channel depends on the degree of contention. If there  
 is no congestion, safety messages are scheduled by the eNB at the next TTI immedi-  
 ately after their generation. It follows that  $T_g$  and  $T_t$  match as shown by Figure ?? (in  
 fact, they may differ at most one TTI) . On the other hand, if LTE resources are not  
 235 enough, some safety messages may have to wait before being assigned to a PRB, and  
 eventually, packets may be overwritten (dropped) by newer ones if its waiting time  
 exceeds  $T_g$ . Figure ?? illustrates this situation, in which  $T_t$  exceeds  $T_g$ . Once safety  
 messages have been transmitted over the access part, they are conveyed through the  
 core network of LTE up to the server. The delay associated with the core network, de-  
 240 noted by  $D$ , is typically small and, more importantly, close to deterministic. Under  
 this deterministic assumption,  $T_t$  and  $T_r$  coincide. Now, from the server point of  
 view, the freshness of information, which contributes to determine the overall accu-  
 racy of the vehicles coordinates, is a function of both  $T_r$  and  $D$ . Remind that we refer  
 to freshness as the length of time since the measurement was taken. Clearly, from  
 245 Figure ??, it follows that the freshness value is at least equal to  $D$  and is bounded  
 above by  $D + T_r$ .

For any given vehicle, we define the precision on location for a given vehicle  $i$  as  
 being the distance that the vehicle has been traveling since the last measurement at  
 the server disposal was taken. We denote by  $e_i$  the location precision of vehicle  $i$ .  
 Recall that the freshness of measurements precisely denotes this time period in be-  
 tween the measurement generation at the vehicle and the current time at the server.  
 It follows that the location precision of each vehicle  $i$ , can be calculated as follows:

$$e_i = (T_{r_i} + D) \cdot v_i \quad (1)$$

where  $v_i$  is the speed of vehicle  $i$  whose value is embedded in the safety messages  
 and hence known by the server. Of course, Eq. ?? obeys that the greater the speed of  
 a vehicle, the larger its error on its location and worse location precision.

250 Assuming that the error on the location for a set of vehicles is deemed too large  
 (or equivalently, their precision is too low), a tempting solution could consist in in-

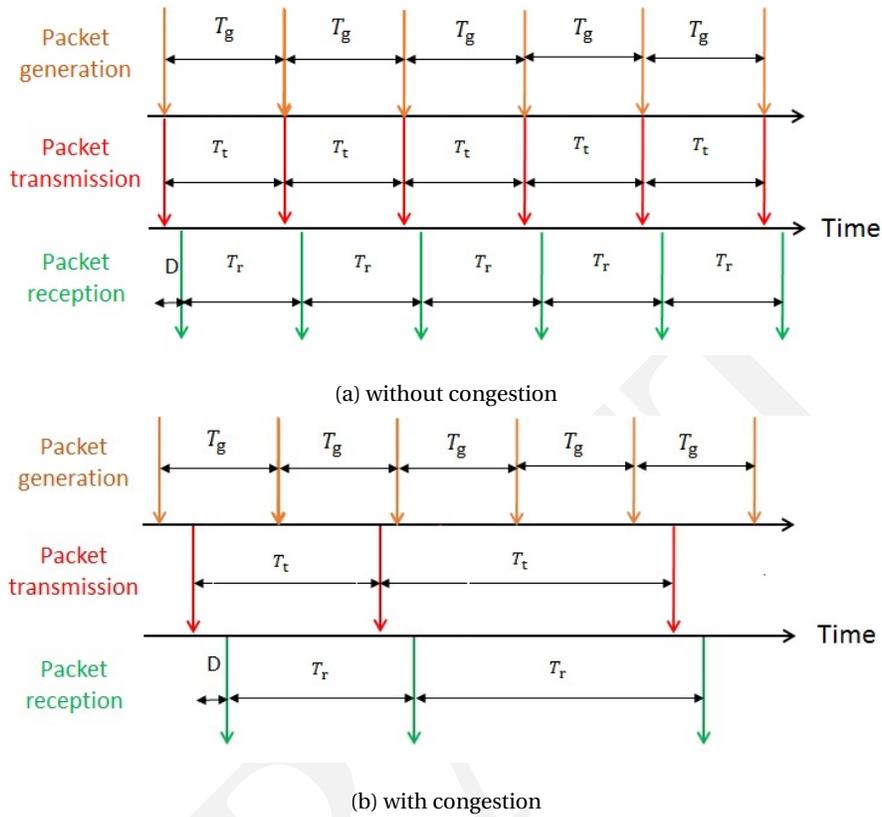


Figure 4: Generation, transmission and reception times.

creasing their safety message rates, i.e. decreasing their generation periods  $T_g$ . This simple solution will work as long as the LTE access network is not congested. Otherwise, it may actually worsen the situation because increasing the safety message rates of vehicles may, in fact, lead to more congestion. Therefore, in the next section, we propose an adaptive solution that increases the message generation rate for some vehicles while reducing it for others so that vehicles experiencing the worst precision get a better location precision and the overall strain on the network resources is kept at a moderate level.

#### 260 4. Adapting the generation rate of safety messages

Setting the safety message rates of vehicles so that all vehicles experience the same level of location precision is not an easy task. Indeed, if every vehicle generates safety messages at the same rate, then their safety messages should undergo, in average, the same level freshness. However, because vehicles run at different speed, 265 they will experience various degrees of precision on their location. This unfairness seems rather unfit for safety applications. A more desirable situation would be that all vehicles undergo the same (good enough) level of precision on their location.

In this section, we propose a solution to adapt generation rates of safety messages so that every vehicle ultimately experiences a similar degree of precision on 270 their location. However, our solution assumes that the freshness of safety messages are known. Hence, prior to the solution description, we come up with an analytical model to calculate these freshness values.

##### 4.1. Analytical model to approximate the freshness of safety messages

Computing the freshness of safety messages is not a straightforward matter because 275 they are not a linear function of the aggregated generation rate of safety messages of all vehicles (representing the workload) and of the available LTE resources. To derive their values, we introduce an analytical model that captures the way that safety messages generated by vehicles compete to gain access to the radio channel. The model comprises a set of  $N$  queues representing the  $N$  vehicles and a set of 280  $C$  servers representing the  $C$  PRBs allocated by LTE. Each queue  $i$  ( $i = 1, \dots, N$ ) is fed according to the generation rate of the corresponding vehicle  $i$  whose period is given by  $T_{g_i}$ . For the sake of simplicity, we refer to  $\lambda_i = 1/T_{g_i}$  as being the message generation rate at node  $i$ . The size of queues is limited to 1 because newer messages overwrite unsent messages. Each server requires exactly one time slot, i.e. 1 285 ms, to complete the transmission of a safety message. Finally, the  $C$  servers (which are shown as  $PRB_1, \dots, PRB_C$ ) are simultaneously exhausting the  $N$  queues in a way that is determined by the LTE scheduler. Therefore, we represent this whole system architecture by a polling model as depicted in Figure ??.

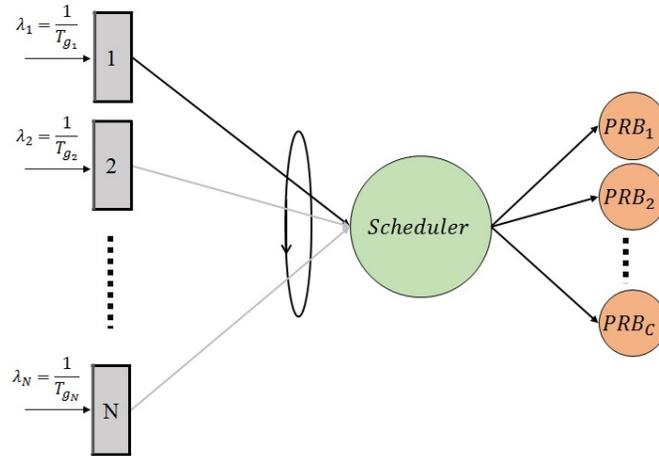


Figure 5: Model of transmission of safety messages through LTE.

The solution to a polling system has been vastly documented in the literature  
 290 [? ], [? ]. However, even under simplifying assumptions (e.g. Poisson arrivals and  
 exponential distributed service times), the exact solutions to polling system remain  
 complex, involving typically numerical Laplace transforms, and becomes unscal-  
 able with a growing number of queues ( $N$  here) and of servers ( $C$  here) due the ex-  
 ponential growth in the number of states within the associated Markov chain.

295 Instead, we propose a simple and approximate solution that relies on the use  
 of servers with vacation [? ] to capture the involved interactions between queues  
 and servers. We decompose the original polling system into a set of  $N$  separated  
 queueing models with server vacation as illustrated in Figure ???. Upon its processing  
 by a server, queue  $i$  becomes and stays empty until the next message generation, at  
 300 most  $T_{g_i}$ . Then, it may have to wait until a server serves it again. This waiting time,  
 corresponding to the processing of packets by servers at other queues, is denoted as  
 the vacation time.

Thus, we are now dealing with  $N$  separate queues, each with constant inter-  
 arrivals (aka deterministic), a queueing room restricted to one, constant services  
 times, and a single server that leaves in vacations upon completing a message pro-

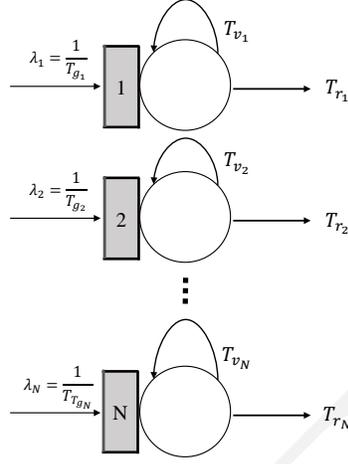


Figure 6: Decomposition of the polling system into  $N$  queues with server vacation.

cessing. Let  $T_{v_i}$  denote the expectation of the duration of a vacation for queue  $i$ . We express it as:

$$T_{v_i} = \frac{\sum_{j=1: j \neq i}^N p_j^{\text{full}}}{C} \cdot \tau + \tau \quad (2)$$

where  $p_j^{\text{full}}$  is the probability that queue  $j$  has a message to send when one of the  $C$  servers comes to it and  $\tau$  is the duration one PRB and represent the transmission time of one message, and is equal to 1 ms. Note that the first term in Eq. ?? reflects the ratio of the mean number of vehicles that have a message to be sent over the number of servers  $C$ , so that it leads to an estimation of the waiting time a message has to be kept before getting processed. The computation of  $T_{v_i}$  involves  $p_i^{\text{full}}$  that can be calculated as follows:

$$p_i^{\text{full}} = \begin{cases} \frac{T_{v_i}}{T_{g_i}}, & T_{g_i} > T_{v_i} \\ 1, & T_{g_i} \leq T_{v_i} \end{cases} \quad (3)$$

Indeed, if the message generation period of a queue is smaller than its vacation time, i.e.  $T_{g_i} \leq T_{v_i}$ , then at least one safety message will be generated during the vacation  
305 time, and the corresponding queue is sure to be found full when the server will return from its leave. On the other hand, if the message generation period is larger

than the vacation time, Eq. ?? simply states that the probability that the queue is found full when the server returns from its leave grows linearly with its generation period.

The time between two successive transmissions for node  $i$  can be viewed as a geometric random variable with parameter  $p_i^{\text{full}}$  re-drawn every  $T_{v_i}$  time unit. Therefore, its expectation, i.e.  $T_{t_i}$ , can be computed as follows:

$$T_{t_i} = \sum_{n=1}^{\infty} n T_{v_i} (1 - p_i^{\text{full}})^{n-1} p_i^{\text{full}} = \frac{T_{v_i}}{p_i^{\text{full}}} \quad (4)$$

Finally, because we assume that potential delays beyond LTE uplink are negligible, we have that:

$$T_{r_i} \simeq T_{t_i} \quad (5)$$

310 Note that Eq. ?? (resp. Eq. ??) expresses  $T_{v_i}$  (resp.  $p_i^{\text{full}}$ ) as a function of  $p_j^{\text{full}}$  ( $j = 1, \dots, N: j \neq i$ ) (resp.  $T_{v_i}$ ). Therefore, we first resort to a fixed-point iteration to discover the values of  $T_{v_i}$ , and then apply Eq. ?? and ?? to obtain  $T_{r_i}$  (as shown by Algorithm ?? in Appendix).

315 We now evaluate the accuracy of the proposed approximate solution to obtain the mean inter-reception time between 2 successive messages of a vehicle  $i$ , i.e.  $T_{r_i}$  ( $i = 1, \dots, N$ ). This validation step is carried out by comparing the results provided by our solution with those delivered by a discrete-event network simulator (NS-3). We set the length of each simulation to 60 seconds and the size of safety messages to 50 Bytes.

To begin with, we consider a scenario with 200 vehicles, categorized into two groups of 100 vehicles each. Vehicles belonging to group 1 (resp. 2) generate safety messages at a period of  $T_g = T$  (resp.  $T_g = 1.5T$ ). The number of PRBs available in each time slot is set to  $C = 3$ . In order to carefully investigate the behavior of our approximation under various levels of workload, we introduce a new parameter,  $\Lambda$ , that represents the total workload of the network. Because each vehicle generates a single safety message every  $T_{g_i}$ ,  $\Lambda$  can be calculated as:

$$\Lambda = \sum_{i=1}^N 1/T_{g_i} \quad (6)$$

Then, we can derive a new parameter,  $\rho$ , which aims at reflecting the level of congestion on the LTE resources by normalizing the total workload by the available resources:


$$\rho = \Lambda/C = \left( \sum_{i=1}^{100} 1/T + \sum_{i=101}^{200} 1/1.5T \right) / 3 = 55/T \quad (7)$$

320 We refer to  $\rho$  as the normalized workload. Note that a value of  $\rho$  less than 1 indicates a network capable to handle the workload, while a value larger than 1 corresponds to an overloaded network.


Figure ?? represents the values of  $T_{r_i}$  of Group 1 obtained by our approximate solution and those delivered by the simulator for a wide range of values of  $T$ , varying 325 from 25 to 175 ms. Note that the corresponding values of the normalized workload  $\rho$  ranges from 0.3 to 2.1. The found results exhibit an interesting pattern. For low values of  $\rho$ , the network is far from congestion so that increasing  $\rho$  (or equivalently the message generation rates of vehicles) results in decreasing the inter-reception time. This tendency holds until the tipping point where the network begins to be 330 overloaded due to a too large workload. Then vehicles must wait before transmitting their messages, which in turn increases the inter-reception times. Finally, for the highest levels of workloads, in which every vehicle has always a packet waiting to be sent, the inter-reception times come close  $\frac{N}{C}\tau$ . We observe that the proposed approximation successfully captures the pattern exhibited by  $T_{r_i}$ , and furthermore 335 that its values are very close to those of the simulation.

Figures ?? shows similar results for groups 2. Here also, we notice that the discrepancy between the approximation and the simulation results is small, usually less than 6%.

To provide a better outlook on the accuracy of our approximation, we perform 340 hundreds of other scenarios with different values for the number of vehicles,  $N$  ranging from 100 to 300, for the number of available PRBs,  $C$  between 1 and 6, as well as for the message generation periods of each vehicle,  $T_{g_i}$ , randomly selected between 20 and 200 ms. The corresponding results are reported in Table ?. This table indicates that with a total number of 100, 200 and 300 vehicles, and only a single PRB, 345 the maximum error is less than 10%, and the average error is less than 7%. For larger

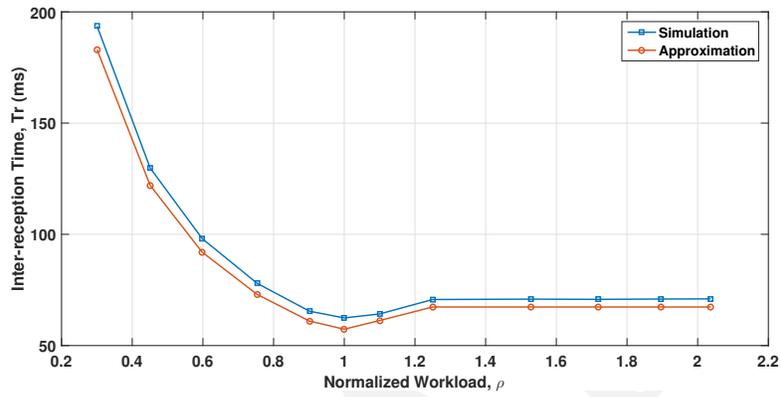

(a) 1st group generating safety message every  $T_g = T$

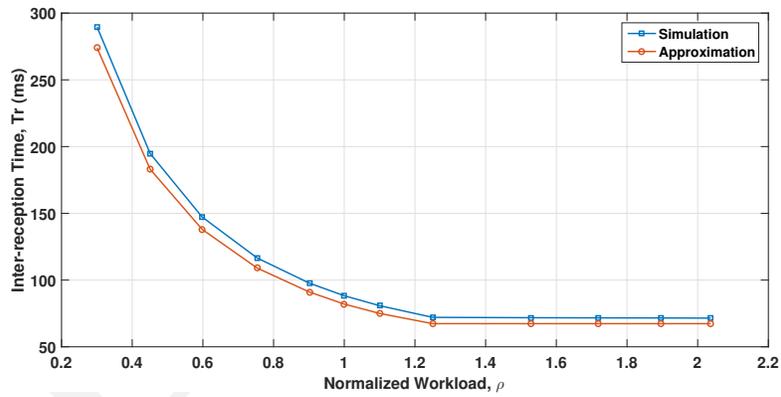

(b) 2nd group generating safety message every  $T_g = 1.5T$

Figure 7: Accuracy of the proposed solution to approximate  $T_r$  with  $N=200$  and  $C=3$ .

numbers of vehicles, the accuracy of the approximation seems to slightly deteriorate. However, interestingly, its accuracy tends to improve with increasing values of  $C$ . For example, considering 300 vehicles, the average error committed by our approximation is close to 7% when there is only 1 PRB, while this average error decreased to less than 5% with 6 PRBs. Finally, it is worth noting that over the hundreds explored scenarios, we never met a case where our approximation committed an error more than 10%.

Table 1: Average and maximum errors committed by the proposed approximation over hundreds of examples.

<b>N</b>	<b>C</b>	<b>Average error (%)</b>	<b>Maximum error (%)</b>
100	1	4.3	6.3
200	1	5.4	7.9
300	1	7.1	9.8
100	3	3	5.1
200	3	4.2	6.6
300	3	5.9	8.4
100	6	1.4	2.5
200	6	2	4.3
300	6	4.9	7.6

#### 4.2. Adapting the rates of safely message generation

We now describe the proposed iterative algorithm that the server can run in order to unify the location precision experienced by vehicles moving at different speeds. At each iteration, given the current values of  $\lambda_i$  (recall that  $\lambda_i = \frac{1}{T_{g_i}}$ ), the algorithm determines the corresponding values of  $T_{r_i}$  and  $e_i$  for all vehicles using the modeling approximation described previously. Then, the algorithm calculates the average location precision computed over all vehicles, i.e.  $\bar{e} = \sum_{i=1}^N e_i$ . Based on these values, the algorithm updates the values of  $\lambda_i$ . It decreases  $\lambda_i$  for vehicles

having a lower value of  $e_i$  (i.e. better location precision) than the average value of vehicles by a multiplicative factor,  $\alpha$  ( $\alpha < 1$ ). On the other hand, it increases  $\lambda_i$  for vehicles experiencing a worse precision than the average value by another multiplicative factor,  $\beta$  ( $\beta > 1$ ). Therefore, the new value of the total workload is as follows:  $\Lambda = \sum_{i:e_i \leq \bar{e}} (\alpha \lambda_i) + \sum_{i:e_i > \bar{e}} (\beta \lambda_i)$ . In order to keep its value constant once the values of  $\lambda_i$  have been updated, it suffices to set a given value for  $\alpha$  (e.g. 0.99), and select  $\beta$  so that:

$$\beta = 1 + \frac{(1 - \alpha) \sum_{i:e_i \leq \bar{e}} \lambda_i}{\sum_{i:e_i > \bar{e}} \lambda_i} \quad (8)$$

This iteration is repeated until convergence is found, namely when the values of  $e_i$  are sufficiently close to  $\bar{e}$ . Then, the server can request vehicles to modify their generation period of safety messages according to the values of  $T_{gi}$  found at convergence. Figure ?? depicts the corresponding block diagram while the associated algorithm is given in the Appendix (see Algorithm ??).

Note that although we have no mathematical proof that our algorithm converges, it never failed to converge within typically several dozens of iterations in the thousands of scenarios (not show in this paper) we explored.

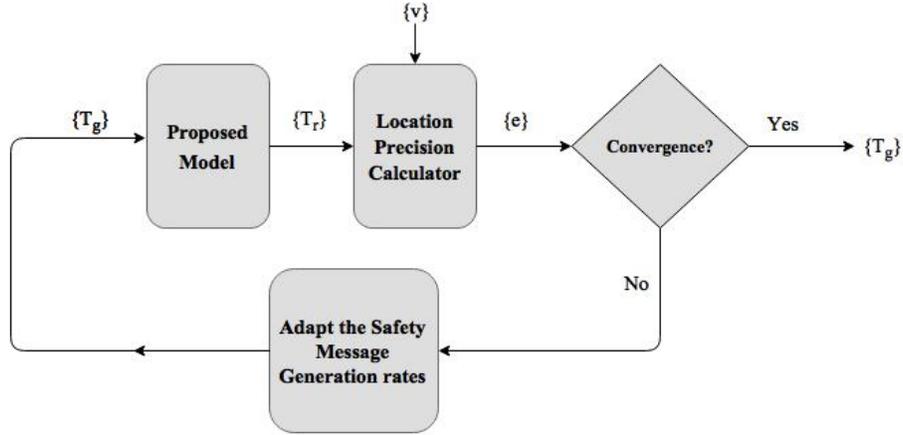


Figure 8: Block diagram for adapting the rates of safety messages.

### 4.3. Numerical results

In this section, we introduce two scenarios to illustrate the behavior of our proposed solution to adapt the generation rates of safety messages.

365 In scenario A, we consider a total of  $N = 320$  vehicles and  $C = 1$  available PRBs per time slot. We categorize the vehicles into four groups, each comprising 80 vehicles, and with a moving speed of 5, 10, 25 and 30  $m/s$ , respectively. We initialize the generation period of safety messages,  $T_{g_i}$ , at the same value for all vehicles, and we run our proposed algorithm. Figure ?? shows the corresponding results. It depicts the evolution of the location precision for each group,  $e_i$ , as well as the average location precision as a function of the number of iterations. Because initially all vehicles have the same value for  $T_{g_i}$ , the values of  $e_i$  start with higher values for the fast vehicles than for the slower ones. Initially the fastest vehicles (group 4) have a location precision close to 10 meters while that of the slowest vehicles (group 1) is around 2 meters. However, after several dozens of iterations and changes of the generation periods of safety messages, our algorithm ultimately converges to a solution wherein all vehicles, regardless of their speed, share the same level of precision which is around 5.5 meters.

380 In scenario B, we consider  $N = 250$  vehicles with a total of  $C = 2$  PRBs available in each slot. Unlike scenario A, each vehicle has its own speed, which is randomly selected between 5 to 35  $m/s$ . We run our proposed algorithm and represent the found results in Figure ?. We show the average, maximum and minimum location precision of the vehicles. Initially the worst location precision (which is corresponding to fastest vehicle) is 4.5 meters while the best location precision (which is corresponding to the slowest vehicle) is only 0.5 meters. Once the algorithm is done, the generation periods of safety messages have been modified in a way that all vehicles experience a location precision of around 2.5 meters.

390 These two scenarios as well as many others demonstrate the ability of our proposed solution to efficiently and automatically set the generation rates of safety messages so that every vehicle undergoes the same level of precision on their location despite having different speeds. This kind of fairness between vehicles is a nice feature for the sake of security on the roads.

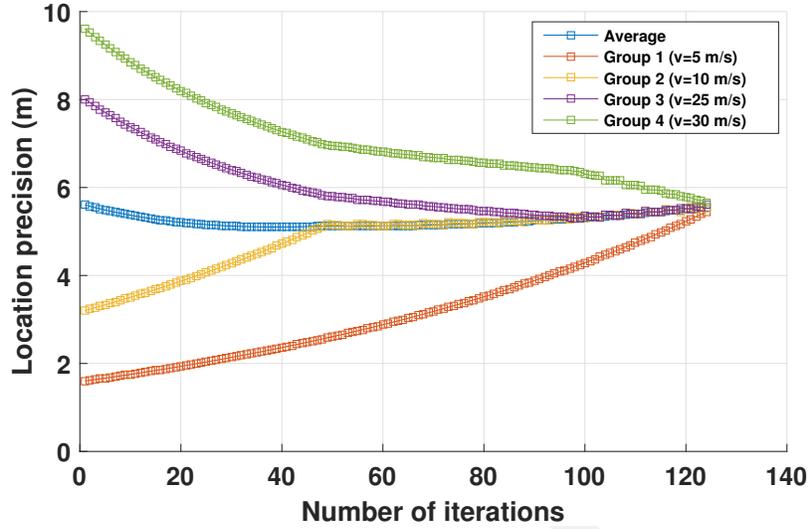


Figure 9: Scenario A: Location precision vs. number of iteration with  $N = 320$  vehicles,  $C = 1$  PRB.

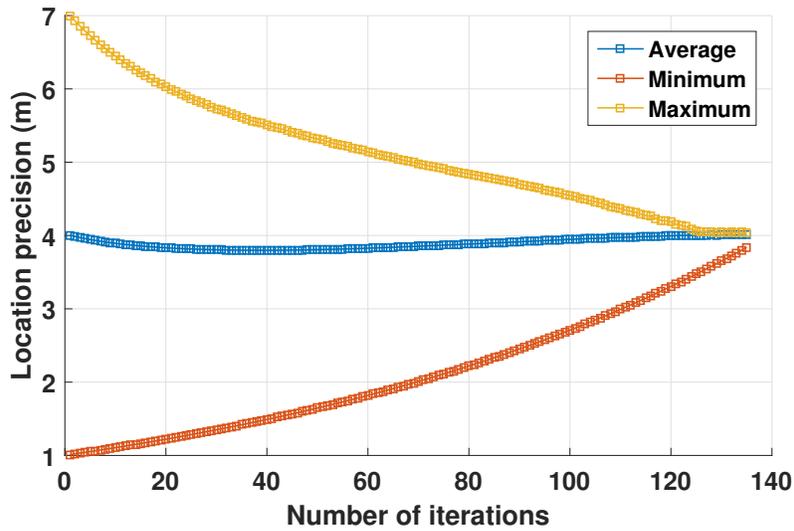


Figure 10: Scenario A: Average, minimum and maximum location precision vs. number of iteration with  $N = 250$  vehicles,  $C = 2$  PRBs.

## 5. Sizing the number of PRBs

In the previous section, we addressed the issue of unfairness by proposed an algorithm to let vehicles with different speed experiencing the same level of precision on their location by tuning differently their generation rate of safety messages. However, even though all vehicles experience the same precision on their location, the found solution may be regarded as inadequate. Such a situation is likely to occur in cases wherein the network is overloaded because the number of allocated PRBs is too low in regard to the aggregated demands of vehicles. On the other hand, situation may occur wherein a good level of precision can be obtained with less PRBs than currently allocated so that the network could assign more resources for other vehicular applications without affecting the safety message transmissions. More generally, because the number of vehicles and their current speed are time varying quantities, the required number of PRBs is also likely to vary with time. Fortunately, as discussed in Section ??, the LTE scheduler is capable to dynamically (de)-allocate PRBs.

In this section, we present a solution to discover the minimum number of PRBs needed so as to meet a given level of precision on the vehicles location. The proposed solution makes use of the algorithm described in Section ?? and works as follows. Initially, the current numbers of vehicles together with their speed are known. We also determine an objective in terms of location precision (expressed in meters). Starting with a number of PRBs equal to 1, we will iteratively increase the number of allocated PRBs until the solution delivered by message generation adaptation (see Section ??) satisfies the desired locations precision. Figure ?? sketches the main step of our algorithm.

We now present an example to illustrate how to exploit our algorithm. We assume that vehicles are uniformly distributed within 4 groups of speed 10, 20, 30 and 40  $m/s$ , respectively. We set the objective for the location precision to 1.5 meters. We now run our algorithm to properly size the number of PRBs for 3 different sizes for the vehicle fleet, namely 100, 200 and 300 vehicles. The corresponding results are reported in Figure ?. If the total number of vehicles is around 100, then 2 PRBs

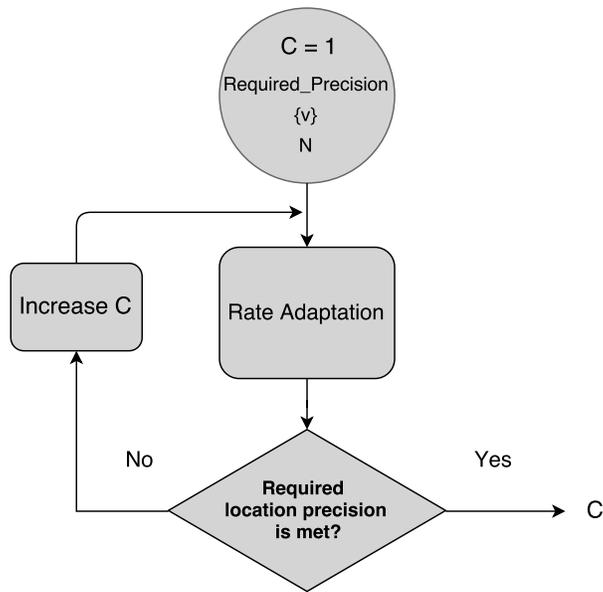


Figure 11: Block diagram for dynamically provisioning LTE resources.

are sufficient to provide the desired level of precision. However, for a number of vehicles close to 200, then it becomes necessary to provision 4 PRBs and even 6 PRBs  
 425 if the number of vehicles grows to 300. We also include similar results for a different value of targeted location precision. Not surprisingly, when the location precision is less stringent, the number of needed PRBs is less. Indeed, a total of 1, 2, and 3 PRBs are sufficient to handle a fleet of 100, 200, and 300 vehicles, respectively.

Finally, note that because the procedure involves little computational complexity,  
 430 it can be periodically re-executed to take into account new number and speed of vehicles.

## 6. Conclusion

Safety applications have an important role to play in the forthcoming vehicular networks. They aim at making streets and roads more secure. However, their efficiency is tightly tied to a good and controlled level of precision regarding the vehicle  
 435 locations. Though GPS devices embedded in vehicles provides accurate estimates

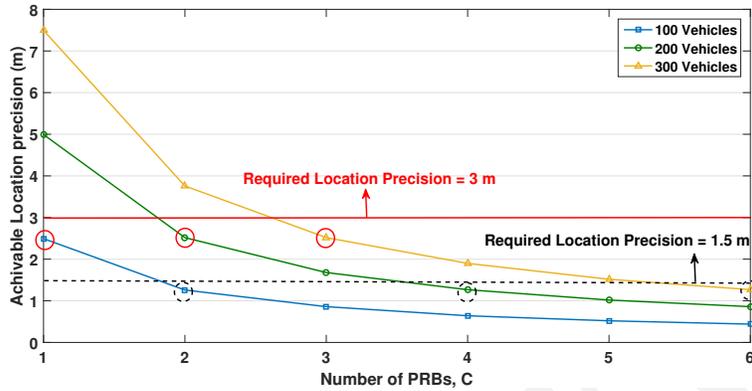


Figure 12: Sizing the number of required PRBs.

of the current vehicle positions, potential contention on the upload channel of the network and the different speeds of the vehicles make the resulted precision unclear.

In this paper, we consider the case wherein the transmission of safety messages  
 440 is carried out through LTE. First, we propose an efficient solution to adapt the gener-  
 ation rate of safety messages of vehicles so that every single of them experiences the  
 same level of location precision. This fairness is attained using an analytical model,  
 based on a queueing model that approximates the level of precision for each vehicle  
 based on their motion speed and their generation rate of safety messages. Second,  
 445 we present a solution to dynamically discover the minimum number of resources,  
 i.e. PRBs, that should be allocated by LTE so as to meet a certain level of location  
 precision for all vehicles. Our numerical results show the effectiveness of our two  
 proposed solutions.

## Appendix

---

**Algorithm 1** Computing Inter-reception time,  $T_r$ 

---

```
1: procedure COMPUTE_T_R( $\{T_g\}$ )
2:   for each node  $i$  do
3:      $T_{v_i} \leftarrow \frac{N}{C}\tau$ 
4:   end for
5:   repeat
6:     for each node  $i$  do
7:       if  $T_{g_i} > T_{v_i}$  then
8:          $P_i^{full} \leftarrow T_{v_i}/T_{g_i}$ 
9:       else
10:         $P_i^{full} \leftarrow 1$ 
11:      end if
12:    end for
13:    for each node  $i$  do
14:       $T_{v_i} \leftarrow \tau * \left(1 + \frac{(\sum_{j \neq i} P_j^{full})}{C}\right)$ 
15:    end for
16:  until Convergence
17:  for each node  $i$  do
18:     $T_{r_i} \leftarrow \frac{T_{v_i}}{P_i^{full}}$ 
19:  end for
20:  return( $\{T_r\}$ )
21: end procedure
```

---

## 450 7. References

- [1] FOTsis, <http://www.fotsis.com>, accessed: 2016-03-10.
- [2] DRIVE C2X, <http://www.drive-c2x.eu/project>, accessed: 2016-03-10.

---

**Algorithm 2** Rate adaptation algorithm

---

```
1: procedure RATE_ADAPTATION( $N, \{v\}, C$ )
2:   Initialize  $\alpha$ 
3:    $\{T_g\} \leftarrow \frac{N}{C}\tau$ 
4:   repeat
5:      $\{T_r\} \leftarrow COMPUTE\_T\_R(\{T_g\})$ 
6:     for each node  $i$  do
7:        $e_i \leftarrow T_{r_i} * v_i$ 
8:     end for
9:      $\{\lambda\} \leftarrow \frac{1}{T_g}$ 
10:     $\beta = 1 + \frac{(1-\alpha)\sum_{i:e_i \leq \bar{e}} \lambda_i}{\sum_{i:e_i > \bar{e}} \lambda_i}$ 
11:    for each node  $i$  do
12:      if  $e_i \leq \bar{e}$  then
13:         $\lambda_i \leftarrow \lambda_i * \alpha$ 
14:      else
15:         $\lambda_i \leftarrow \lambda_i * \beta$ 
16:      end if
17:    end for
18:  until Convergence
19:  return ( $\{\lambda\}, \{e\}$ )
20: end procedure
```

---

- [3] K. Bilstrup, E. Uhlemann, E. G. Strom, U. Bilstrup, Evaluation of the IEEE 802.11p MAC Method for Vehicle-to-Vehicle Communication, in: Vehicular Technology Conference, 2008. VTC 2008-Fall. IEEE 68th, 2008, pp. 1–5. doi: 10.1109/VETECF.2008.446.
- [4] G. Araniti, C. Campolo, M. Condoluci, A. Iera, A. Molinaro, LTE for vehicular networking: a survey, IEEE Communications Magazine 51 (5) (2013) 148–157. doi:10.1109/MCOM.2013.6515060.
- [5] R. Gordon, ITS and the Connected Vehicle, in: Intelligent Transportation Sys-

tems, Springer International Publishing, 2016, Ch. 13, pp. 225–235.

- [6] European Telecommunications Standards Institute, “Intelligent Transport Systems (ITS); vehicular communications” etsi en 302 636-5-1, Tech. rep., ETSI (2014).
- 465 [7] Intelligent Transport Systems (ITS); Framework for Public Mobile Networks in Cooperative ITS (C-ITS), Tech. rep., ETS (2013).
- [8] A. Vinel, 3GPP LTE Versus IEEE 802.11p/WAVE: Which Technology is Able to Support Cooperative Vehicular Safety Applications?, IEEE Wireless Communications Letters 1 (2) (2012) 125–128. doi:10.1109/WCL.2012.022012.120073.
- 470 [9] C. Lottermann, M. Botsov, P. Fertl, G. Araniti, C. Campolo, M. Condoluci, A. Iera, A. Molinaro, LTE for Vehicular Communications, in: Vehicular ad hoc Networks, Springer International Publishing, 2015, Ch. 16, pp. 457–501.
- [10] CoCarX Project, <http://www.aktiv-online.org/deutsch/aktiv-cocarX.html>, accessed: 2016-03-10.
- 475 [11] Z. Hameed Mir, F. Filali, LTE and IEEE 802.11p for vehicular networking: a performance evaluation, EURASIP Journal on Wireless Communications and Networking 2014 (1) (2014) 1–15.
- [12] Y. Park, J. Ha, S. Kuk, H. Kim, C. J. M. Liang, J. Ko, A Feasibility Study and Development Framework Design for Realizing Smartphone-Based Vehicular Networking Systems, IEEE Transactions on Mobile Computing 13 (11) (2014) 2431–2444. doi:10.1109/TMC.2014.2309959.
- 480 [13] Network Simulator 3, <https://www.nsnam.org>, accessed: 2016-03-10.
- [14] L.-C. Tung, J. Mena, M. Gerla, C. Sommer, A cluster based architecture for intersection collision avoidance using heterogeneous networks, in: Ad Hoc Networking Workshop (MED-HOC-NET), 2013 12th Annual Mediterranean, 2013, pp. 82–88. doi:10.1109/MedHocNet.2013.6767414.
- 485

- [15] G. Remy, S. M. Senouci, F. Jan, Y. Gourhant, LTE4V2X x2014; collection, dissemination and multi-hop forwarding, in: Communications (ICC), 2012 IEEE International Conference on, 2012, pp. 120–125. doi:10.1109/ICC.2012.6364412.
- [16] S. Ucar, S. C. Ergen, O. Ozkasap, Multi-Hop Cluster based IEEE 802.11p and LTE Hybrid Architecture for VANET Safety Message Dissemination, IEEE Transactions on Vehicular Technology PP (99) (2015) 1–1. doi:10.1109/TVT.2015.2421277.
- [17] R. K. Schmidt, T. Leinmuller, E. Schoch, F. Kargl, G. Schafer, Exploration of adaptive beaconing for efficient intervehicle safety communication, IEEE Network 24 (1) (2010) 14–19. doi:10.1109/MNET.2010.5395778.
- [18] S. Wang, L. Le, N. Zahariev, K. K. Leung, Centralized rate control mechanism for cellular-based vehicular networks, in: Global Communications Conference (GLOBECOM), 2013 IEEE, 2013, pp. 4914–4920. doi:10.1109/GLOCOMW.2013.6855729.
- [19] Y. Feng, Y. Du, Z. Ren, Z. Wang, Y. Liu, L. Zhang, Adaptive Beacon Rate Adjusting mechanism for safety communication in cooperative IEEE 802.11p-3G vehicle-infrastructure systems, in: Communications (APCC), 2010 16th Asia-Pacific Conference on, 2010, pp. 441–446. doi:10.1109/APCC.2010.5679988.
- [20] L. Liu, X. Wang, C. Wang, F. Liu, An efficient beacon rate adaptation scheme for vehicular networks, in: Wireless Communications Signal Processing (WCSP), 2013 International Conference on, 2013, pp. 1–6. doi:10.1109/WCSP.2013.6677230.
- [21] S. Zemouri, S. Djahel, J. Murphy, Smart adaptation of beacons transmission rate and power for enhanced vehicular awareness in VANETs, in: Intelligent Transportation Systems (ITSC), 2014 IEEE 17th International Conference on, 2014, pp. 739–746. doi:10.1109/ITSC.2014.6957777.

- 515 [22] E. Egea-Lopez, P. P. Marino, Distributed and Fair Beaconing Rate Adaptation for Congestion Control in Vehicular Networks, IEEE Transactions on Mobile Computing PP (99) (2016) 1–1. doi:10.1109/TMC.2016.2531693.
- [23] IS-Wireless, <http://www.is-wirelesstraining.com/trainings>, accessed: 2016-03-10.
- 520 [24] J. A. C. Resing, Polling systems and multitype branching processes, Queueing Systems 13 (4) (1993) 409–426. doi:10.1007/BF01149263.  
URL <http://dx.doi.org/10.1007/BF01149263>
- [25] O. J. Boxma, J. A. Weststrate, Waiting Times in Polling Systems with Markovian Server Routing, Springer Berlin Heidelberg, Berlin, Heidelberg, 1989, pp. 89–  
525 104. doi:10.1007/978-3-642-75079-3\_8.  
URL [http://dx.doi.org/10.1007/978-3-642-75079-3\\_8](http://dx.doi.org/10.1007/978-3-642-75079-3_8)
- [26] N. Tian, Z. G. Zhang, Vacation Queueing Models, Springer US, 2016.