

# GraVVITAS: Generic Multi-touch Presentation of Accessible Graphics

Cagatay Goncu, Kim Marriott

► **To cite this version:**

Cagatay Goncu, Kim Marriott. GraVVITAS: Generic Multi-touch Presentation of Accessible Graphics. 13th International Conference on Human-Computer Interaction (INTERACT), Sep 2011, Lisbon, Portugal. pp.30-48, 10.1007/978-3-642-23774-4\_5 . hal-01590565

**HAL Id: hal-01590565**

**<https://hal.inria.fr/hal-01590565>**

Submitted on 19 Sep 2017

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# GraVVITAS: Generic Multi-touch Presentation of Accessible Graphics

Cagatay Goncu and Kim Marriott

Clayton School of Information Technology, Monash University  
cagatay.goncu@monash.edu.au, kim.marriott@monash.edu.au

**Abstract.** Access to graphics and other two dimensional information is still severely limited for people who are blind. We present a new multimodal computer tool, GraVVITAS, for presenting accessible graphics. It uses a multi-touch display for tracking the position of the user's fingers augmented with haptic feedback for the fingers provided by small vibrating motors, and audio feedback for navigation and to provide non-geometric information about graphic elements. We believe GraVVITAS is the first practical, generic, low cost approach to providing refreshable accessible graphics. We have used a participatory design process with blind participants and a final evaluation of the tool shows that they can use it to understand a variety of graphics – tables, line graphs, and floorplans.

**Keywords:** graphics, accessibility, multi-touch, audio, speech, haptic

## 1 Introduction

Graphics and other inherently two dimensional content are ubiquitous in written communication. They include images, diagrams, tables, maps, mathematics, plots and charts etc. They are widely used in popular media, in workplace communication and in educational material at all levels of schooling. However, if you are blind or suffer severe vision impairment your access to such graphics is severely limited. This constrains enjoyment of popular media including the web, restricts effective participation in the workplace and limits educational opportunities.

There are a number of different techniques for allowing people who are blind to access graphics, the most common being tactile graphics presented on swell or embossed paper. We review these in Section 3. However, it is fair to say that none of these are widely used and that currently there is no reasonably priced technology or tool which can be effectively used by someone who is blind to access graphics, tables and other two-dimensional content. This is in contrast to textual content, for which there exist computer applications widely used by the blind community. For instance, DAISY provides access to textbooks and other textual material using speech or refreshable Braille displays and Apple's VoiceOver screen reader provides accessible access to the text in webpages.

The main contribution of this paper is to present the design and evaluation of a new tool for computer mediated access to accessible graphics. The great advantages of our tool are that it is relatively cheap to construct and costs virtually nothing to operate, provides a generic approach for presenting all kinds of 2-D content, can

support dynamic, interactive use of graphics and could be integrated with existing applications such as DAISY.

*GraVVITAS* (for Graphics Viewer using Vibration, Interactive Touch, Audio and Speech) is a multi-modal presentation device. The core of *GraVVITAS* is a touch sensitive tablet PC. This tracks the position of the reader's fingers, allowing natural navigation like that with a tactile graphic. Haptic feedback is provided by small vibrating motors of the kind used in mobile phones which are attached to the fingers and controlled by the tablet PC. This allows the user to determine the position and geometric properties of graphic elements. The tool also provides audio feedback to help the user with navigation and to allow the user to query a graphic element in order to obtain non-geometric information about the element.

We have used a user-centered and participatory design methodology, collaborating with staff from Vision Australia<sup>1</sup> and other relevant organizations and blind participants at all stages in the design and development of the tool. We believe participatory design with blind participants is vital for any project of this kind since our experiences, and previous research suggest that people who have been blind from an early age may have quite different strategies for understanding graphics to people who are sighted [25]. The results of our evaluation of *GraVVITAS* are very positive: our blind participants learnt to use the tool to understand a variety of graphics including tables, line graphs and floorplans.

## 2 Design Requirements

In this section we detail our three initial design requirements. These were developed in collaboration with staff at Vision Australia. The first design requirement is that the computer tool *can be used effectively by people who are blind to read an accessible version of a wide range of graphics and 2D content*. This means that the accessible version of the graphic should contain the same information as the original visual representation. However simple information equivalence is quite a weak form of equivalence: a table and a bar chart presenting the same data are equivalent in this sense. We require a stronger form of equivalence in which the spatial and geometric nature of the original graphic is maintained, so that the blind viewer of the accessible version builds up an internal spatial representation of the graphic that is functionally equivalent to that of the sighted viewer. Such *functional equivalence* is important when graphics are being used collaboratively by a mixture of sighted and blind people, say in a class room or workplace, or when contextual text explains the graphic by referring to the graphic's layout or elements.

Functional equivalence also means that the accessible graphic is more likely to maintain at least some of the cognitive benefits that sighted readers obtain when using a graphic instead of text. Starting with Larkin and Simon [21] many researchers have investigated the differences between graphics and text and the benefits that can make graphics more effective than text [31, 33, 30]. Such benefits include: geometric and topological congruence, homomorphic representation, computational off-loading, indexing, mental animation, macro/micro view, analogue representation and graphical

---

<sup>1</sup> Vision Australia is the primary organization representing people with vision impairment in Australia and a partner in this project.

constraining. While it is unlikely that all of these benefits will be displayed by the accessible representation we believe that many will be [14].

The second design requirement is that *the tool is practical*. This means that it has to be inexpensive to buy and to operate, can be used in classrooms, home and work environments, and can be integrated with other applications such as screen readers.

The final design requirement is that *the tool supports interactive, active use of graphics*. This means that the tool must have a rapidly refreshable display so that it supports the kind of interactive use of graphics that sighted users now take for granted: interactive exploration of a graphic at different levels of detail; creation and editing of graphics; and dynamic presentation of graphics created by applications like graphing calculators or spreadsheet tools.

### 3 Background

We now review the main previous approaches to accessible graphics and evaluate them with respect to our three design requirements. As a first step it is useful to review different characteristics of the relevant human perceptual subsystems [6, 16].

The visual subsystem has sensors that receive light and provide visual information such as shape, size, colour, intensity and position. It needs no physical contact with objects to acquire this information. It has a wide area of perception that provides parallel information in a continuous flow and within this is a narrow area (the fovea) which can detect highly detailed information.

The haptic subsystem requires physical contact with objects to acquire information. Cutaneous sensors on the skin detect touch and temperature, while the kinesthetic sensors on the muscles and joints of the body sense motion. The haptic subsystem can provide much of the same information as the visual subsystem (shape, size, texture and position) and haptic input can lead to internal spatial representations that are functionally equivalent to those obtained from visual input [4].

The aural subsystem has sensors that receive aural information such as audio, and speech. It is more effective in acquiring sequential stimuli. Since the aural subsystem provides binaural hearing it can also locate the source of a stimulus. It does not need to have a physical contact with the objects to acquire this information.

Tactile graphics are probably the most frequently used approach to accessible graphics and are commonly used in the education sector. They allow the viewer to feel the graphic and have been in use for over 200 years [10]. Tactile graphics are usually displayed on embossed tactile paper in which embossers punch the paper with varying height dots to create raised shapes or thermo-form (swell) paper which contains thermo capsules that rise when heat is applied. Both of these are non-refreshable media.

Much less commonly, tactile graphics can be displayed on electro-mechanical refreshable displays [36]. These have multiple lines of actuators that dynamically change in time. When the display is activated, the user traces the area to feel what is on the display. These refreshable displays are primarily designed for presenting Braille. Larger displays suitable for presenting tactile graphics are expensive (e.g. A4 size displays are around US \$20,000) and have quite low resolution.

One limitation of a pure tactile presentation is that text must be presented as Braille. This takes up considerable space and many blind users cannot read Braille. It can also be difficult to use easily distinguishable textures when translating a graphic

that makes heavy use of patterns and colour. From our point of view, however, the main limitation of tactile graphics is that they are typically created on request by professional transcribers who have access to special purpose paper and printers. As a result they are expensive and time consuming to produce. For instance, transcription of the graphics in a typical mathematics textbook takes several months and is estimated to cost more than US \$100,000. Furthermore non-refreshable media do not support interactive use of graphics.

TGA [19] overcomes the need for professional transcribers by using image processing algorithms to generate tactile graphics. Text in the image is identified and replaced by the Braille text and the visual properties such as colours, shading, and textures are simplified. The image is then uniformly scaled to satisfy the required fixed size of the Braille characters. However, it still requires access to expensive special purpose paper and printers or a refreshable display. Furthermore, because of the large amount of scaling that may be required to ensure that the Braille text does not overlap with other elements the results are sometimes unsatisfying.

Touch sensitive computing devices like the IVEO [13] and Tactile Talking Tablet (TTT) [20] are a relatively new development. These allow a tactile graphic to be overlaid on top of a pressure-sensitive screen. When reading the user can press on an element in the tactile overlay to obtain audio feedback. The main advantage is that audio feedback can be used instead of Braille. However, the use of these devices is limited, requires expensive tactile overlays and does not support interactive use of the graphic.

To overcome the need for expensive tactile overlays some tools have been developed that rely on navigation with a joystick or stylus. A disadvantage of such approaches is that unlike tactile graphics, they do not allow multi-hand exploration of the graphic since there is a single interaction point for navigation.

One of the most mature of these is TeDub (Technical Drawings Understanding for the Blind) [27]. It is designed to present node-link diagrams such as UML diagrams. TeDub uses an image processing system to classify and extract information from the original drawing and create an internal connected graph representation through which the user can navigate with a force feedback joystick by following links. Speech is used to describe the node's attributes. A key limitation from our point of view is that the navigation and interaction is specialized to node-link diagrams and is difficult to generalize to other kinds of graphics.

The VAR (Virtual Audio Reality) [12] tool also provides a joystick for navigation. It allows the user to perform tasks on a graphical user interface. The elements in the visual interface are represented by short audio representations placed in a 3D space. The user navigates in this 3D space using the joystick. During the tracing, audio associated to elements are played through the headphones. In MultiVis, which has a similar design, the authors used a force-feedback device and non-speech audio to construct and provide quick overviews of bar charts [23]. A key limitation of VAR and MultiVis is that they are specialized to a particular kind of application.

In another study, a tool using a graphics tablet and a VTPlayer tactile mouse is evaluated [37] for the presentation of bar charts. The user explored a virtual bar chart on a graphics tablet using a stylus. Based on the position of the stylus, the two tactile arrays of Braille cells on the mouse, which was held in the other hand, were activated. The activation of the pins in these cells was determined by the pixel values pointed by the stylus. Speech audio feedback was also provided by clicking the button on the stylus. The tool had the advantage that it was inexpensive to buy and cheap to run. Although designed for bar charts it could be readily generalised to other graphics.

However, we believe that because the interaction is indirect (through a mouse controlling a cursor that the user cannot see) it would be quite difficult to learn to use. Another limitation is that it provides only a single point of interaction.

In [22] a tool for navigating line graphs was presented. This used a single data glove with four vibrator motors. The motors were not used to provide direct haptic feedback about the graphic but rather were used to inform the user on which direction to move their hand in order to follow the line graph.

A hybrid tactile overlay/haptic approach was employed in a networked application that allowed blind people to play a board game called Reversi (also called Othello)[26]. This used a touch screen with a tactile overlay to present the board and dynamic haptic and audio feedback to present the position of the pieces on the board.

Layered audio description of the graphic and its content is a reasonably common technique for presentation of graphics to blind people. This is typically done by trained transcribers and so is expensive and time consuming. It also has the great disadvantage that functional equivalence is lost. Elzer et al [9] have developed an application for automatically generating an audio description of a bar chart summarizing its content. This overcomes the need for a trained transcriber. While clearly useful, for our purposes the disadvantages are that the application is specialized to a single kind of information graphic and that it does not preserve functional equivalence.

Thus we see that none of the current approaches to presentation of accessible graphics meet our three design requirements: there is a need for a better solution.

## **4 Design of GraVVITAS**

We used a participatory design approach in collaboration with blind participants to design our tool. We initially planned to use a more formal usability testing approach but we found that we were often surprised by what our blind participants liked or disliked, and so found it difficult to foresee some of the problems in the interface. Therefore we instead used a participatory design process [18] in which the design evolved during the course of the usability study and was sometimes changed during the user evaluations because of participant feedback.

It is worth pointing out that all approaches to presenting accessible graphics, including tactile graphics, require the blind user to spend a considerable amount of time learning to use the approach. This is a significant difficulty when evaluating new tools since it is usually not practical to allow more than a few hours training before a participant uses the tool. We partially overcame this problem by using the same participants in multiple user studies meaning that they had more experience with the tool.

Since there are relatively few blind people and it is often hard for them to travel, it is quite difficult to find blind participants (also pointed out in [32, 28]). Hence the number of participants was necessarily quite small—between 6 and 8 for each usability study. Participants were recruited by advertising the study on two email lists for print-disabled people in Australia, and we used all who responded. They were all legally blind and had experience reading tactile graphics. They were aged between 17 and 63. Participants were asked to sign a consent form which had previously been sent by email to them and which they were given a Braille version of on the day. This also

provided a short explanation of the usability study and what type of information would be collected.

#### 4.1 Basic design

One of the most important design goals for GraVVITAS was that it should allow, as far as possible, the blind user to build a functionally equivalent internal spatial representation of the graphic. We have seen that a haptic presentation allows this [4]. Previous studies have shown that blind participants prefer tactile presentations to audio [15] and audio is preferred in exploration and navigation tasks. All of our participants felt that tactile graphics were the most effective way that they knew of for presenting graphics to the blind.

We believe that one reason for the effectiveness of tactile graphics is that they allow natural navigation and discovery of geometric relationships with both hands and allow the use of multiple fingers to feel the geometric attributes of the graphic elements. The use of both hands allows semi-parallel exploration of the graphic as well as the use of one hand as an anchor when exploring the graphic. Both of these strategies are common when reading Braille and tactile graphics [11, 8].

However as we have noted, tactile graphics or overlays are expensive to produce and are non-refreshable so they do not support interactive use of the graphic. What is required is a low-cost dynamic tactile display that supports exploration with multiple hands and fingers. Recent advances in touch screen and haptic feedback devices finally allow this.

Our starting point was a touch sensitive tablet PC which tracks the position of the reader's fingers. We used a Dell Latitude XT<sup>2</sup> which is equipped with NTrig DuoSense dual-mode digitizer<sup>3</sup> which supports both pen and touch input using *capacitive* sensors. The drivers on the tablet PC allowed the device to detect and track up to four fingers on the touchscreen. We allowed the user to use the index and middle finger of both the left and right hand.

A key question was how to provide haptic feedback to the reader's fingers so that they could feel like they were touching objects on the touchscreen. In recent years there has been considerable research into haptic feedback devices to increase realism in virtual reality applications including gaming, and more recently to provide tactile feedback in touch screen applications [2]. The main approaches are electromechanical deformation of the touch screen surface, mechanical activation applied to the object (stylus or finger) touching the surface, and electro-vibration of the touch screen, e.g. see [1]. In the longer term (i.e. 2+ years) there is a good chance that touch screens will provide some sort of dynamic tactile feedback based on electromechanical deformation or electro-vibration. However, during the time we have been developing GraVVITAS, mechanical activation applied to the fingers touching the screen was the most mature and reliable technology for supporting multi-touch haptic feedback.

We therefore chose to provide haptic feedback by using a kind of low cost data glove with vibrating actuators. To do so we attached small vibrating motors of the kind used in mobile phones to the fingers and controlled these from the tablet PC through an Arduino Diecimila board<sup>4</sup> attached to the USB port. Since the

---

<sup>2</sup> <http://www.dell.com>


<sup>3</sup> <http://www.n-trig.com>

<sup>4</sup> <http://arduino.cc>

touchscreen could track up to four fingers there were four separately controlled motors. The amount of vibration depended on the colour of the graphic element under the finger and if the finger was over empty space there was no vibration.

One difficulty was that when there are more than four fingers on the touch screen the device behaved inconsistently and fingers touching the touchscreen were not always detected. To shield unwanted fingers, we used a cotton glove. The tool is shown in Figure 1. Detection of fingers remained an issue for some users who needed to be trained to flatten their finger tips to be properly detected by the touchscreen. During the training session we suggested that users lift their fingers up and put them down again to reset the finger assignment if they suspected one of their fingers was not properly detected. This meant that it took some time for some participants to get used to the tool.

Probably the most technically challenging part of the implementation was determining in real-time which fingers were touching the tablet and which finger corresponded to which touchpoint on the device. Knowing this was necessary for us to provide the appropriate haptic feedback to each finger. We stored the maximum and average vector difference between the stroke sequences on the device. Based on these differences we used a

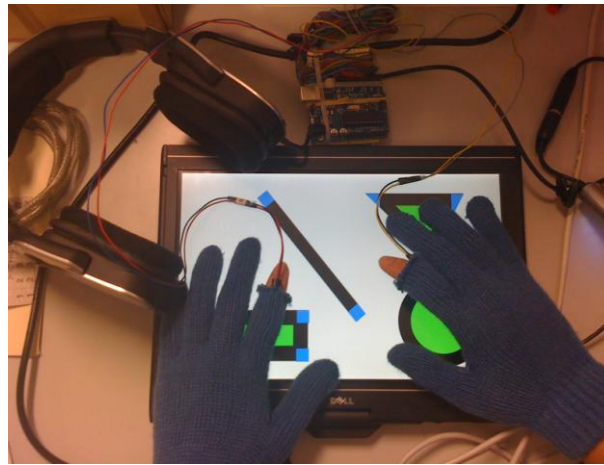

**Fig. 1.** Using GraVVITAS to view a diagram

Bayesian approach which chose the most probable feasible *finger configuration* where a finger configuration is a mapping from each stroke sequence to a particular finger. A configuration was infeasible if the mapping was physically impossible such as assigning the index and middle finger of the same hand to strokes that were sometimes more than 10cm apart. There was a prior probability for each finger to be touching the device and a probability of a particular finger configuration based on an expected vector difference between each possible pair of fingers. We also used the area of the touch points, and the angle between them in the calculations. The approach was quite effective.

One disadvantage of using a haptic presentation of a graphic is that because of the sequential movement of hands and fingers involved in perception, acquisition of information is slower and less parallel than vision. Also, because there is no haptic equivalent of peripheral vision, the position of previously encountered objects must be stored in memory [34]. To partially address this problem, we decided to provide audio feedback in order to help the user with navigation and to obtain an overview of the graphic and its layout. The use of audio means that the user can obtain an overview without having to physically touch the elements.

Another disadvantage of a purely haptic presentation is that it is difficult to represent non-geometric properties of elements and text. While Braille can be used it takes up a lot of space and cannot be read by many users. To overcome this we



decided to provide audio feedback when the viewer queries graphic elements on the display. This was similar to TTT or IVEO.

The tool displays graphic content specified in SVG (the W3C standard for Scalable Vector Graphics) on a canvas which is implemented using Microsoft Windows Presentation Framework. The canvas loads a SVG file and use the metadata associated with the shapes to control the tool behaviour. The metadata associated with a shape is: its ID, the vibration level for the edges and audio volume level for the interior of the shape and for its boundary, the text string to be read out when the shape is queried, and the name of a (non-speech) audio file for generating the sound associated with the shape during navigation. The SVG graphics could be constructed using any SVG editor: we used Inkscape<sup>5</sup>. The only extra step required was to add the metadata information to each shape. We did this using Inkscape's internal XML editor.

## 4.2 Haptic vs audio feedback

In our first trials with the tool we experimented with the number of fingers that we attached the vibrating motors to. We tried: (a) only the right index finger, (b) the left and right index fingers, and (c) the left and right index and middle fingers. Our experience, corroborated by feedback from a single blind participant, was that it was beneficial to use fingers on both hands but that it was difficult to distinguish between vibration of the index and middle finger on the same hand. We first tried attaching the vibrating devices to the underside and then to the top of the finger but this made little difference. Our experience is that, with enough practice, one can distinguish between vibration on all four fingers but this takes many hours of use. We therefore decided to use the tool with two fingers—the left and right index fingers—as we would not be able to give the participants time to learn to use four fingers when evaluating the tool.

Given that we decided only to provide haptic feedback for the left and right index finger, a natural question to investigate was whether stereo audio feedback might be better. To determine this we implemented an audio feedback mode as an alternative to haptic feedback. This mode was restricted to the use of one finger or two fingers on different hands. In audio mode if the user touches an object on the screen then they will hear a sound from the headphones. If they use one finger they will hear a sound coming from both headphones while if they use two fingers then they will hear a sound on the left/right headphone if their left/right finger is on an element. The sounds associated with objects were short tones from different instruments played in a loop. They were generated using the JFugue library.

We conducted a usability study to investigate whether audio or haptic feedback was better for determining the geometric properties (specifically position and shape) of graphic elements. The study used simple graphics containing one to three geometric shapes (line, triangle, rectangle and circle) such as those shown in Figures 2, and 3. Each shape had a low intensity interior colour and a thick black boundary around it. This meant that the intensity of the haptic or audio feedback was greater when the finger was on the boundary.

We presented the graphics to each participant in the two different modes—audio and haptic—in a counterbalanced design. For each mode the following two-step procedure was carried out. First we presented the participant with one training

---

<sup>5</sup> [www.inkscape.org](http://www.inkscape.org)

graphic that contained all of the different shapes. In this step we told them what shapes were on the screen and helped them to trace the boundaries by suggesting techniques for doing so and then letting them explore the graphic by themselves. Second, the participant was shown three graphics, one at a time and asked to explore the graphic and let us know when they were ready to answer the questions. They were then asked to answer two questions about the shapes in the graphic:


1. How many objects are there in the graphic?
2. What kind of geometric shape is each object?

The times taken to explore the graphic and then answer each question were recorded as well as their answers. After viewing and answering questions about the graphics presented with the audio and haptic interaction modes the participants were asked which they preferred and invited to give comments and explain the features that influenced their preference.


Eight participants completed the usability study. We found that 6 out of 8 participants preferred haptic feedback. Error rates with audio and haptic feedback were very similar but the time to answer the questions was generally faster with haptic feedback. These results need to be considered with some care because they were not statistically significant because of the small number of participants.

Another caveat is that we slightly modified the presentation midway through usability study. This was because the first three participants had difficulty identifying the geometric shapes. The reason was that they found it difficult to determine the position and number of vertices on the shape. To overcome this in subsequent experiments object vertices were given a different color so that the audio and haptic feedback when touching a vertex differed from that for the boundary and the interior of the shape. This reduced the error count to almost zero in the subsequent participants.

We observed that participants used two quite different strategies to identify shapes. The first strategy was to find the corners of the shapes, and then to carefully *trace* the boundary of the object using one or two fingers. This was the strategy we had expected.

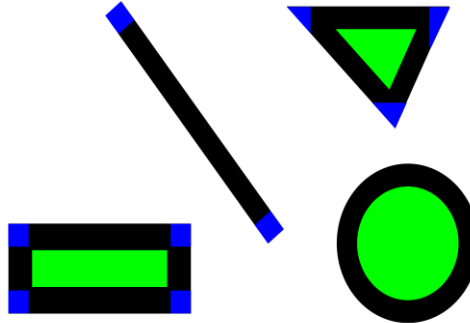

**Fig. 2.** Example graphic used in haptic vs audio feedback usability study.

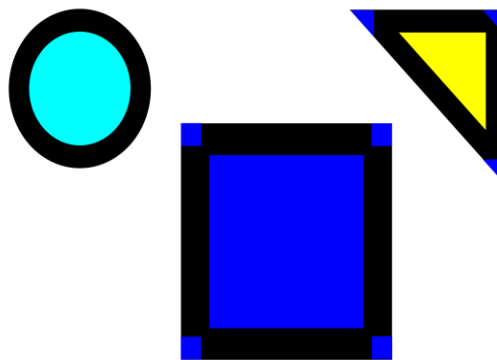

**Fig. 3.** Example graphic used in audio interface design usability study.

The second strategy was to use a single finger to repeatedly perform a quick horizontal and/or vertical *scan* across the shape, moving the starting point of the finger between scans slightly in the converse direction to that of the scan. Scanning gives a different audio or haptic pattern for different shapes. For instance, when scanning a rectangle, the duration of a loud sound on an edge, a soft sound inside the shape, and another loud sound on the other edge are all equal as you move down the shape. In contrast for a triangle the duration of the soft sound will either increase or decrease as you scan down the shape. This strategy was quite effective and those participants who used it were faster than those using the boundary tracing strategy.

As a result of this usability study we decided to provide haptic feedback (through the vibrating motors) rather than audio feedback to indicate when the user was touching a graphic element. The choice was because of user preferences, the slight performance advantage for haptic feedback, because haptic feedback could be more readily generalized to more than two fingers, and because it allowed audio feedback to be used for other purposes.

### 4.3 Design of the audio interface

The next component of the interface that we designed was the audio interface. We investigated the use of audio for two purposes: to provide non-geometric information about a graphic element and to help in navigation.

The initial interface for obtaining non-geometric information about a graphic element was similar to that used in IVEO or TTT. If a finger was touching a graphic element the user could query the element by “twiddling” their finger in a quick tiny circular motion around the current location without lifting it up. This would trigger the audio (speech or non-speech) associated with the element in the SVG file. Audio feedback could be halted by lifting the finger from the tablet. Audio feedback was triggered by whichever finger the user twiddled and could come from more than one finger.

Designing the interface for determining the position of elements in the graphic using audio was more difficult and we developed two quite different techniques for doing this.

The first technique was to generate a *3D positional audio* based on the location of one of the fingers on the touchscreen. This use of 3D audio was based on initial conversations and studies with blind people who said they liked the use of 3D audio in computer games [35]. When the user was not touching an element, they would hear through the headphones the sound associated with the graphic elements within a fixed radius of the finger’s current position. The sound’s position (in 3D) was relative to the finger’s position. So if there was an object on the top right of the finger, the associated audio would sound as if it comes from the top right of the user.

The 3D positional audio navigation mode was initiated by triple tapping one of the fingers and stopped when either the user lifted the finger or they triple tapped their other finger initiating 3D positional audio relative to that finger. We wondered if receiving audio and haptic feedback for the same finger could be confusing so we allowed the user to turn the 3D positional audio off temporarily by triple tapping the active finger when receiving haptic feedback—it resumed when the haptic feedback stopped.

In the second technique, stereo audio was generated for all objects that intersected the *scanline* between the two fingers touching the screen. Thus if there was an object

between the two touch points then the user would hear its associated sound. This audio was positioned relative to the mid point of the scanline. The use of the scanline was suggested by how blind users read Braille or use a quick horizontal scanning to discover the objects in a tactile graphic [17, 24] The scanline navigation mode was initiated by tapping both fingers and stopped by lifting one of the fingers from the screen. Triple tapping could also be used to temporarily turn it off.

We were not sure how effective these two navigation modes would be and so we conducted a second usability study to investigate this. The study was similar to our first study. We used graphics with 2-4 geometric shapes like the graphic in Figure 3. One shape in each graphic was significantly larger than the other shapes. Different colours were used for object boundaries, interiors and vertices. This time we associated the name of an object's geometric shape, i.e. circle, triangle, line or rectangle, with the object and this was read out when the object was queried.

For each of the two navigation modes (3D positional audio and scanline) the following two-step evaluation procedure was carried out. First we presented the participants with training graphics one at a time for that mode, which was initially on. In this part we told them which shapes were on the screen and helped them to use the mode to navigate through the shapes. We also taught them how to turn the navigation mode on and off. Second, the participant was shown one experimental graphic at a time and asked to explore the graphic and to let us know when they were ready to answer the questions. They were then asked to answer three questions about the shapes in the graphic:

1. How many objects are there in the graphic?
2. What kind of geometric shape is each object?
3. Which is the largest shape?

The time taken to initially explore the graphic and then answer each question was recorded as were their answers.

We used 6 participants in the study, some of whom had completed the first experiment. For those who had not done the first study, we had an additional training session for the haptic interaction.

Audio feedback combined with different sounds for each shape allowed participants to quickly obtain an overview of the graphic and after a first scan in most cases they correctly inferred the number of graphic elements. We found there was a slight performance benefit for the 3D positional audio mode and that there were very few errors for either mode. While participants successfully used the twiddling gesture to query objects, two of them complained that twiddling was difficult to use. All participants kept audio feedback turned on for both navigation modes, with only one person turning it off temporarily.

As expected, the scanline method was used to get an overview of the graphic. Interestingly, some of the participants also used it to get the size of the shape rather than using the haptic feedback. They started the scanning at the top with the widest scanline and narrowed the scanline to the left or to the right depending on which object they wanted to see. When they felt a haptic feedback from the vibrator motors they knew that they had touched the edges of the shape and so they could estimate the width of the shape. After this they went up and down with both fingers to find out the height of the shape. This was quite effective.

The preferences were split evenly between the two navigation modes and 4 of the 6 participants suggested that we provide both. Support for providing both also came from observation and comments by the participants suggesting that the modes were complementary: the scanline being most suited to obtaining an initial overview of the

graphic and the 3D positional audio being suited to finding particular graphic elements.

#### **4.4 Final design**

Based on the user evaluations and participant feedback we decided on the following design for the user interface for GraVVITAS. We allowed the user to feel graphic elements on the display with their left and right index fingers using haptic feedback to indicate when their finger was touching an element. Both 3D positional audio and scanline navigation modes were provided. These were controlled using triple taps and which mode was entered was dependent on how many fingers were touching the display when the mode was turned on. Graphic elements could be queried by either a twiddle or double tap gesture.

### **5 Evaluation**

After finalizing the design we conducted a user evaluation designed to test whether GraVVITAS met our original design goal and could be used by our blind participants to effectively read and understand a variety of graphics. We tested this using three common kinds of 2D content that were quite different to each other: a table, a floor plan, and a line graph.

#### **5.1 Design of the graphics**

An important factor in how easily an accessible graphic can be read is the layout and design of the graphic. In order to conduct the user evaluation we first needed to decide how to present the graphics to be used in the study. Our starting point were guidelines developed for tactile graphics. These included guidelines developed by tactile transcribers which were quite low-level, giving advice on which textures are easily distinguishable, how thick lines need to be etc [29, 8]. We also referred to the higher-level design principles developed for touch screen applications with a static tactile overlay by Challis and Edwards [5]. Based on these we proposed some general principles for designing graphics for use with GraVVITAS.

The first principle was that the layout of the accessible graphic should preserve the basic structure and geometry of the original visual graphic. This was to ensure functional equivalence between the two representations and corresponds to the foundation design principle of Challis and Edwards that “A consistency of mapping should be maintained such that descriptions of actions remain valid in both the visual and non-visual representations.”

However, this does not mean that the design of the accessible graphic should exactly mirror that of the original graphic. One reason for this is that the resolution of touch is much less than sight, and so tactile graphics need to be cleaner and simpler than the original graphic. This is even more true for graphics viewed with GraVVITAS because it is difficult to distinguish objects smaller than about 5mm. Thus our second design principle was that the shapes should be simple and readily distinguishable at a 5mm resolution.

In tactile graphics the height of the tactile object is often used to distinguish between different kinds of elements, similarly to the use of colour or style in visual graphics. In the case of GraVVITAS, the choice of vibration level is the natural analogue. We determined that users could distinguish three different levels. Our design principle was that: *the vibration level should be used to distinguish different kinds of elements, with the same level used for similar kinds of objects.*

Blind users often find it difficult when encountering an unfamiliar kind of tactile graphic to gain an understanding of its structure and purpose. One of Challis and Edwards' principles was that the design should "whenever possible encourage a specific strategy for the exploration of a particular (kind of) display." Reflecting this principle we developed the following generic strategy for reading a graphic with GraVVITAS.

We provided at the top left corner of each graphic a "summary" rectangular shape which, when queried, would provide a short spoken description of the graphic's purpose and content (without giving specific answers to the questions used in the usability study). For consistency we decided that the summary shape should have the same audio sound associated with it in all graphics, making it easier for the user to identify and find it.

Our suggested reading strategy was to first use scanline navigation to traverse the graphic from the top of the screen to the bottom to obtain an overview of the elements. Then to use the 3D positional audio navigation to find the summary rectangle, and use the query gesture to hear the summary. Then repeatedly to use 3D positional audio to navigate through the graphic to find the other elements. And, for each element, using the query gesture to find what each element is and to use haptic feedback to precisely locate the element and understand its geometric shape.

The other aspect we had to consider in the presentation was the design of the audio feedback provided in the navigation mode. The human perceptual subsystem groups audio streams by using different characteristics of audio such as frequency, amplitude, temporal position, and multidimensional attributes like timbre, and tone quality [7]. Humans can differentiate about five or six different simultaneous sounds. Thus, we felt that associating audio with all elements in a complex graphic would end up being quite confusing. Instead we decided to associate audio feedback with those graphic elements that were particularly important (possibly emphasized in the original visual graphic) and objects that were natural navigational landmarks. Of course if an object had no associated audio it still has haptic feedback associated with it. We chose to use the same audio for the same kind of objects.

Using these guidelines we designed the three example graphics shown in Figures 4, 5, and 6 for the usability study. Note that the red square at the top left corner of each graphic is the summary rectangle.

For the table, the cells were represented as squares and aligned in rows and columns. We did not associate audio with the cells because we thought the regular layout of a table would make navigation straightforward. Querying a cell gave its value as well as the name of the row and column it was in. We used different vibration levels to differentiate between row headers, column headers and cells. We used thin lines to connect the headers and the cells so that it would be easier to find the neighbouring cells. The table gave the average distances ran by three different runners in three different months. We asked the following questions:

- (T1) Who ran the maximum distance in February?

- (T2) What is the distance ran by John in March?
- (T3) How was the performance of Richard?

For the floor plan we used audio feedback for the doors but not for the rooms. The idea being that this would aid understanding how to “walk” through the floorplan. The rooms were represented with filled rectangles which had two different vibration levels corresponding to their border and interior, and the doors had one strong vibration level. The doors and the rooms also had associated text information that could be queried. The floor plan was of a building with one entrance and seven rooms connected by six doors. We asked the following questions:

- (F1) Where is room 4?
- (F2) How do you go to room 7 from the entrance?
- (F3) How many doors does room 6 have?

For the line graph the axes and labels were represented as rectangles which have their value as the non-geometric information. The lines in the graph belong to two datasets so they had different vibration levels. Small squares were used to represent the exact value of a line at a grid point. Their non-geometric information was the name of the dataset and their value on the horizontal and vertical axis. These squares also had audio associated with them so that the user could hear them while using the 3D positional mode. The line graph showed the average points scored by two different basketball teams during a seven month season. We asked the following questions:

- (L1) What is the average score of Boston Celtics in September?
- (L2) Have the Houston Rockets improved their score?
- (L3) Which team generally scored more during the season?

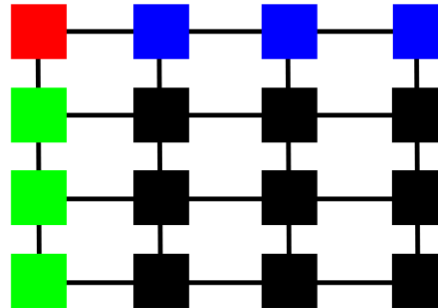


Fig. 4. Table

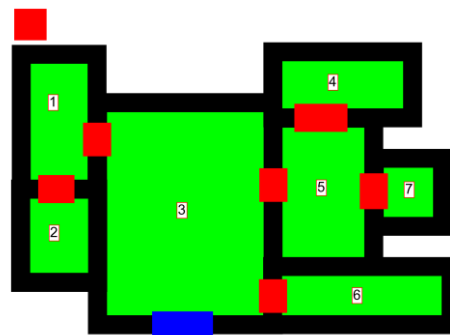


Fig. 5. Floor Plan – room numbers are not shown in the actual graphic.

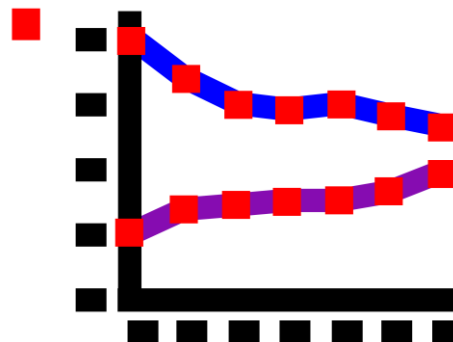


Fig. 4. Line graph

## 5.2 Usability study

We used 6 participants all of whom had completed the second usability study. All had spent at least 4 hours using variants of the tool before the study. The primary purpose of the study was to determine if they could successfully use GraVVITAS to answer the questions about the three kinds of graphic. A secondary purpose was to obtain feedback about the drawing conventions and the interface of GraVVITAS.

We did the following for each kind of graphic: table, floor plan, and line graph. First we presented the participant with an example graphic of that kind on GraVVITAS, walking them through the graphic so as to ensure that they understood the layout convention for that kind of graphic and were comfortable using the tool. Then we presented the experimental graphic and asked them to explore it and answer the three questions about it. We recorded the answers as well as the time to answer the questions. After presenting the three kinds of graphics we asked for feedback about the tool.

All 6 participants were able to read the example graphics and answer most of the questions correctly – two incorrect answers for F2. Participant P3 could not understand the table because of the lines connecting the cells. As a result of feedback from P3 we removed the lines from the table graphic for the remaining three participants to avoid possible confusion. Question F2 was answered incorrectly by two participants because they became confused by the geometry of the floorplan.

In Table 1, we give the time in seconds taken by each participant to answer each question and the median time. The initial exploration took only a few seconds. The times vary considerably between participants. In part this is because we had not told participants to hurry and so they often checked and rechecked their answer or simply spent time “playing” with the graphic in order to better understand how to use GraVVITAS. With more experience one would expect the times to significantly reduce.

Participant	Table			Floorplan			Line graph		
	T1	T2	T3	F1	F2	F3	L1	L2	L3
P1	67	40	45	110	1058	49	266	301	393
P2	462	45	37	50	420	300	142	80	70
P3	n/a	n/a	n/a	120	300	285	326	242	219
P4	100	92	36	62	210	360	350	158	141
P5	113	20	78	102	370	225	80	131	29
P6	121	16	35	55	388	155	180	96	159
Median	113	40	37	82	379	255	223	145	150

**Table 1.** Time taken in seconds to answer each question for the three kinds of graphic.

All participants said they liked the tool and said that with enough training they would be more than comfortable using the tool. The error and timing data, backed by participant comments, suggests that 5 out of 6 participants found the floorplan the most difficult graphic to understand, followed by the line graph, and then the table. This is not too surprising: one would expect that graphics with a more predictable layout structure are going to be easier to read by blind people.

Most participants used a reading strategy similar to the one we suggested. 4 of them started with moving a scanline from the top of the graphics to the bottom so that



they could determine the location of the components. They then used one finger with 3D audio navigation mode to find the exact location of each component. When they found a component (indicated by vibration) they almost always used the query gesture to get its associated information. They repeated this process for each component.

Usually the first component they looked for was the summary object which they queried once. 4 of the participants queried this summary component a second time during the interaction but none of them a third time. 2 of the participants started by placing their fingers in the middle of the graphic and querying the objects, but later decided to query the summary shape so as to perform a more systematic exploration.

5 of the participants used the 3D audio all the time, only 1 of them turned it off saying that s/he could remember where each component was. When reading the line graph, 5 of them used two fingers to answer the trend question, and 1 of them preferred to read each individual data point.

3 of the participants had problems with double tapping to query an object because our implementation required both taps to intersect with the object and if the user was tapping on the border of the object then they were quite likely to miss the object on the next tap, meaning that the tool would not provide the expected query information. Several participants suggested that rather than having to explicitly query an object the associated audio description should be triggered when the user first touches the object. This seems like a good improvement. Other suggestions were to provide more meaningful audio with objects for the navigation mode.

## **6 Conclusion**

We have described the design and evaluation of a novel computer tool, GraVVITAS, for presenting graphics to people who are blind. It demonstrates that touch-screen technology and haptic feedback devices have now reached a point where they have become a viable approach to presenting accessible graphics. We believe that in the next few years such an approach will become the standard technique for presenting accessible graphics and other two dimensional information to blind people, much as screen readers are now the standard technique for presentation of textual content. While touch screens and SVG are still not widely used, we believe that in a few years they will be mainstream technology.

We had three design requirements when designing GraVVITAS. The first was that it could be used effectively by people who are blind to read an accessible version of a wide range of graphics and 2D content. Our user studies provide some evidence that this is true, allowing the participants to answer questions about different kinds of graphics. We observed that in all of the user studies the participants referred to the shapes in terms of their relative position to each other and their position overall in the graphic. This provides additional evidence that the tool allows the blind user to build an internal representation that is functionally similar to that of the sighted user looking at the original graphic. A limitation of the current evaluation is its small size and that the same participants were used in several studies. In the future we plan to conduct an evaluation with a larger set of participants.

The second design requirement was that the tool is practical. The tool is inexpensive to buy and to operate: it was built from the off-the-shelf components with a total cost of US \$2,508 of which nearly \$2,000 was for the Dell Latitude XT Tablet

PC (with multi-touch screen). It costs virtually nothing to operate for the end user although there are still time costs involved in the creation of the graphics for the effort of transcribers. Its size and design mean that it could be used in classrooms, home and work environments, and it could be integrated with other applications such as DAISY to read graphics contained in books etc. The main limiting factor is that it currently requires a human to produce the accessible graphic. This can be done using freely available SVG editors such as Inkscape so is an improvement on the need for access to special purpose printers and paper when producing tactile graphics. However, our longer term goal is to automate this process, along the lines of TGA, by automatically generating accessible graphics from SVG.

The final design requirement was that the tool supports interactive, active use of graphics. In principle because the display is refreshable GraVVITAS supports this. However the current software does not yet take advantage of this. We plan to explore how best to provide user-guided zooming and panning. This will help us overcome the low resolution of the graphics displayed on the screen. We will also explore how to support creation of graphics by blind users through applications like graphing calculators and also with a generic graphics authoring tool.

Finally, we would like to further investigate the design of our system. First we want to examine how non-blind users in limited situations can also benefit from it [3]. Second, we want to explore whether blind users with concerns about wearable systems can prefer to use other devices such as electro-vibration surfaces where the feedback is produced on the device.

**Acknowledgements:** We thank the participants for their effort and great feedback. We also thank the Vision Australia transcription department, especially Peter Szikla, for their support for the project and user studies. We thank Michael Wybrow for his insightful comments. We also acknowledge the support of the ARC through Discovery Project Grant DP0987168. Finally, we thank Chongqing Linglong Electronics Co.,Ltd. (<http://en.lnlon.com>) for providing the vibrator motors.

## References

- [1] O. Bau, I. Poupyrev, A. Israr, and C. Harrison. TeslaTouch: electrovibration for touch surfaces. In *Proc. of the UIST*, pages 283–292. ACM, 2010.
- [2] M. Benali-Khoudja, M. Hafez, J. Alexandre, and A. Kheddar. Tactile interfaces: a state-of-the-art survey. In *Int. Symposium on Robotics*, 2004.
- [3] B. Buxton and W. Buxton. *Sketching user experiences: getting the design right and the right design*. Morgan Kaufmann, 2007.
- [4] Z. Cattaneo et al. Imagery and spatial processes in blindness and visual impairment. *Neuroscience and Biobehavioral Reviews*, 32(8):1346–1360, 2008.
- [5] B. Challis and A. Edwards. Design principles for tactile interaction. *Haptic Human-Computer Interaction*, pages 17–24, 2001.
- [6] S. Coren, L. Ward, and J. Enns. *Sensation and perception*. Wiley, 2004.
- [7] D. Deutsch. *The psychology of music*. Academic Pr, 1999.
- [8] P. Edman. *Tactile graphics*. American Foundation for the Blind, 1992.
- [9] S. Elzer et al. A probabilistic framework for recognizing intention in information graphics. In *Proc. of the Int. Joint Conf. on AI*, volume 19, pages 1042–1047, 2005.
- [10] Y. Eriksson. *Tactile Pictures: Pictorial Representations for the Blind 1784-1940*. Gothenburg Uni. Press, 1998.
- [11] E. Foulke. Reading braille. In *Tactual perception*, pages 223–233. Cambridge Uni Press, 1982.

- [12] C. Frauenberger and M. Noisternig. 3D Audio Interfaces for the Blind. *Workshop on Nomadic Data Services and Mobility*, pages 11–12, 2003.
- [13] J. Gardner and V. Bulatov. Scientific Diagrams Made Easy with IVEO. *Computers Helping People with Special Needs*, 4061:1243–1250, 2006.
- [14] C. Goncu, K. Marriott, and F. Aldrich. Tactile Diagrams: Worth Ten Thousand Words? *Diagrammatic Representation and Inference*, pages 257–263, 2010.
- [15] C. Goncu, K. Marriott, and J. Hurst. Usability of Accessible Bar Charts. *Diagrammatic Representation and Inference*, pages 167–181, 2010.
- [16] Y. Hatwell. *Images and Non-visual Spatial Representations in the Blind*, pages 13–35. John Libbey Eurotext, 1993. source: <http://books.google.com>.
- [17] Y. Hatwell and F. Martinez-Sarrochi. The tactile reading of maps and drawings, and the access of blind people to works of art. In *Touching for knowing: cognitive psychology of haptic manual perception*. John Benjamins B.V., 2003.
- [18] F. Kensing and J. Blomberg. Participatory design: Issues and concerns. *Computer Supported Cooperative Work (CSCW)*, 7(3):167–185, 1998.
- [19] R. Ladner et al. Automating tactile graphics translation. *Proc. of the 7th International ACM SIGACCESS Conference on Computers and Accessibility*, pages 150–157, 2005.
- [20] S. Landau and K. Gourgey. Development of a Talking Tactile Tablet. *Information Technology and Disabilities*, 7(2), 2001.
- [21] J. Larkin and H. Simon. Why a Diagram is (Sometimes) Worth Ten Thousand Words. *Cognitive Science*, 11(1):65–100, 1987.
- [22] M. Manshad and A. Manshad. Multimodal Vision Glove for Touchscreens. In *Proc. of ACM ASSETS*, pages 251–252. ACM, 2008.
- [23] D. McGookin and S. Brewster. MultiVis: Improving Access to Visualisations for Visually Impaired People. In *CHI'06 Extended Abstracts*, pages 267–270. ACM, 2006.
- [24] S. Millar. *Reading by touch*. Routledge, 1997.
- [25] S. Millar and M. Ltd. *Space and sense*. Psychology Press/Taylor & Francis, 2008.
- [26] D. Nagasaka et al. A Real-Time Network Board Game System Using Tactile and Auditory Senses for the Visually Impaired. *Computers Helping People with Special Needs*, pages 255–262, 2010.
- [27] H. Petrie et al. TeDUB: A Aystem for Presenting and Exploring Technical Drawings for Blind People. *Computers helping people with special needs*, pages 47–67, 2002.
- [28] H. Petrie, F. Hamilton, N. King, and P. Pavan. Remote usability evaluations with disabled people. In *Proc. of the SIGCHI conference on Human Factors in computing systems*, pages 1133–1141. ACM, 2006.
- [29] Purdue University. *Tactile Diagram Manual*, 2002.
- [30] M. Scaife and Y. Rogers. External cognition: how do graphical representations work? *International Journal of Human-Computer Studies*, 45(2):185–213, 1996.
- [31] A. Shimojima. The graphic-linguistic distinction: Exploring alternatives. *Artificial Intelligence Review*, 13(4):313–335, 1999.
- [32] H. Takagi, S. Saito, K. Fukuda, and C. Asakawa. Analysis of navigability of Web applications for improving blind usability. *ACM Trans. on Computer-Human Interaction*, 14(3):13, 2007.
- [33] B. Tversky. Spatial schemas in depictions. In *Spatial schemas and abstract thought*, pages 79–111. MIT Press, 2001.
- [34] S. Ungar. Cognitive Mapping without Visual Experience. *Cognitive mapping: Past, Present and Future*, pages 221–248, 2000.
- [35] E. Velleman, R. van Tol, S. Huiberts, and H. Verwey. 3D Shooting Games, Multimodal Games, Sound Games and More Working Examples of the Future of Games for the Blind. In *Computers Helping People with Special Needs*, pages 257–263, 2004.
- [36] F. Vidal-Verdu and M. Hafez. Graphical Tactile Displays for Visually-Impaired People. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 15(1):119–130, 2007.
- [37] S. Wall and S. Brewster. Feeling What You Hear: Tactile Feedback for Navigation of Audio Graphs. In *Proc. of the SIGCHI Conference on Human Factors in Computing Systems*, pages 1123–1132. ACM, 2006.