

# Trefftz -Discontinuous Galerkin Approach for Solving Elastodynamic Problem

Hélène Barucq, Henri Calandra, Julien Diaz, Elvira Shishenina

► **To cite this version:**

Hélène Barucq, Henri Calandra, Julien Diaz, Elvira Shishenina. Trefftz -Discontinuous Galerkin Approach for Solving Elastodynamic Problem. ENUMATH 2017 - European Conference on Numerical Mathematics and Advanced Applications, Sep 2017, Voss, Norway. hal-01691617v2

**HAL Id: hal-01691617**

**<https://hal.inria.fr/hal-01691617v2>**

Submitted on 31 Jan 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Trefftz - Discontinuous Galerkin Approach for Solving Elastodynamic Problem

Hélène Barucq<sup>1</sup>, Henri Calandra<sup>2</sup>, Julien Diaz<sup>1</sup>, and Elvira Shishenina<sup>1,2</sup>

<sup>1</sup> Magique-3D, Inria-UPPA E2S-CNRS, Pau, France  
elvira.shishenina@inria.fr

<sup>2</sup> Total S.A., Houston, USA henri.calandra@total.com

**Abstract.** Methods based on Discontinuous Finite Element approximation (DG FEM) are basically well-adapted to specifics of wave propagation problems in complex media, due to their numerical accuracy and flexibility. However, they still lack of computational efficiency, by reason of the high number of degrees of freedom required for simulations.

The Trefftz-DG solution methodology investigated in this work is based on a formulation which is set only at the boundaries of the mesh. It is a consequence of the choice of test functions that are local solutions of the problem. It owns the important feature of involving a space-time approximation which requires using elements defined in the space-time domain.

Herein, we address the Trefftz-DG solution of the Elastodynamic System. We establish its well-posedness which is based on mesh-dependent norms. It is worth noting that we employ basis functions which are space-time polynomial. Some numerical experiments illustrate the proper functioning of the method.

## Introduction

Among the different possible approaches to solve partial differential equations there exists a distinct family of methods based on the use of trial functions in the form of exact solution of the governing equations (but not the boundary conditions). The idea was first proposed by Trefftz in 1926 [1], and since then it has been largely developed and generalized. The main step for its implementation as an efficient computational tool was achieved in 1978 when Jirousek and his collaborators proposed the Hybrid-Trefftz (HT) finite element model [2]. The results of their work allowed solving different boundary value problems, thus giving roots to multiple applications in different fields such as potential problems, plane elasticity, plate bending (thin, thick, post-buckling), heat conduction as well as advective-diffusive transport (see [3] and the references therein).

Trefftz type methods have been widely used with time-harmonic formulations by Farhat, Tezaur, Harari, Hetmaniuk (2003 - 2006) (see [4,5]), Gabard (2007) (see [6]), Badics (2014) (see [7]), Hiptmair, Moiola, Perugia (2011 - 2013) (see [8-10]) and others, while studies are still limited for reproducing temporal phenomena. Only few papers are interested in Maxwell equations in time [11-14]. They are mostly devoted to a theoretical analysis of the method, showing

the convergence and stability. To the best of our knowledge, numerical tests involving plane wave approximation are restricted to 1D + time dimensional case. Space-time Trefftz approximation by Lagrange multipliers for the second order formulation of the transient wave equation was explored in [15,16]. A Trefftz-DG method for the first-order transient acoustic wave equations in arbitrary space dimensions has been introduced in a recent paper of Moiola and Perugia (2017) [17]. It is an extension of the one-dimensional scheme of Kretzschmar et al. [14]. The authors provide a complete a priori error analysis in both mesh-dependent and mesh-independent norms.

In this work we develop a theory for Trefftz-DG method applied to the Elastodynamic System (ES) of wave propagation. We confirm well-posedness of the variational problem based on the estimates in mesh-dependent norms. We consider a space-time Trefftz polynomial basis and provide some numerical results for 2D ES. We give a short conclusion and discuss the perspectives in the end of this paper.

## 1 Trefftz-DG formulation for elastodynamics

The Elastodynamic System is based on three fundamental laws of continuum mechanics: movement equations, constitutive equations (Hooke's law), and geometric equations (infinitesimal strain tensor definition) [18].

We consider a global space-time domain  $Q = \Omega \times I$ , where  $\Omega \subset R^d$  is a bounded Lipschitz physical space domain and  $I = (0, T)$  is a time interval.

The Lamé coefficients  $\lambda \equiv \lambda(x)$ ,  $\mu \equiv \mu(x)$  and solid density  $\rho \equiv \rho(x)$  are the solid parameters, assumed to be piecewise constant and positive.

We consider the first order ES in terms of velocity  $v \equiv v(x, t)$  and stress  $\sigma \equiv \sigma(x, t)$  fields:

$$\begin{cases} \partial_t \sigma - \mathbf{C} \varepsilon(v) = 0 & \text{in } Q, \\ \rho \partial_t v - \operatorname{div} \sigma = 0 & \text{in } Q, \\ v(\cdot, 0) = v_0, \sigma(\cdot, 0) = \sigma_0 & \text{in } \Omega, \\ \sigma = \mathbf{g}_D & \text{in } \partial\Omega \times I. \end{cases}$$

Here  $\mathbf{C}$  is the elastic coefficient tensor,  $\varepsilon(v) = (\nabla v + \nabla v^T)/2$  is the infinitesimal strain tensor. The boundary conditions  $\mathbf{g}_D \equiv \mathbf{g}_D(x, t)$ , the velocity  $v_0$  and the stress  $\sigma_0$  are the initial data.

By symmetry and positivity of the tensor  $\mathbf{C}$ , the application  $\varepsilon \mapsto \mathbf{C} \varepsilon$  is an isomorphism in the symmetrical tensor space [18]. Thus, we may consider the corresponding inverse application  $\mathbf{A}$ , verifying the same properties of symmetry and positivity:

$$\begin{cases} \mathbf{A} \partial_t \sigma - \varepsilon(v) = 0 & \text{in } Q, \\ \rho \partial_t v - \operatorname{div} \sigma = 0 & \text{in } Q, \\ v(\cdot, 0) = v_0, \sigma(\cdot, 0) = \sigma_0 & \text{in } \Omega, \\ \sigma = \mathbf{g}_D & \text{in } \partial\Omega \times I. \end{cases} \quad (1)$$

### 1.1 Space-time Trefftz-DG formulation

We choose a Lipschitz sub-domain  $K \subset Q$  such that  $\lambda$ ,  $\mu$  and  $\rho$  are constant in  $K$ . We define  $n_K \equiv (n_K^x, n_K^t)$  as the outward pointing unit normal vector on  $\partial K$  and  $(v, \boldsymbol{\sigma}) \in H^1(K)^d \times H^1(K)^{d^2}$ , where  $d$  is the dimension of the physical space  $\Omega$ .

Multiplying both equations of (1) by the test functions  $(\omega, \boldsymbol{\xi}) \in H^1(K)^d \times H^1(K)^{d^2}$  respectively, and integrating by part in space and time twice, we obtain:

$$\begin{aligned} & - \int_K \left[ \boldsymbol{\sigma}(\mathbf{A}\partial_t \boldsymbol{\xi} - \boldsymbol{\varepsilon}(\omega)) + v \cdot (\rho\partial_t \omega - \operatorname{div} \boldsymbol{\xi}) \right] dv \\ & + \int_{\partial K} \left[ \mathbf{A} \boldsymbol{\sigma} : \boldsymbol{\xi} n_K^t - v \cdot n_K^x \boldsymbol{\xi} + \rho v n_K^t \cdot \omega - \boldsymbol{\sigma} n_K^x \cdot \omega \right] ds = 0. \end{aligned} \quad (2)$$

Without losing generality with respect to the classical space DG methods, we introduce a non-overlapping mesh  $\mathcal{T}_h$  on  $Q$ , whose elements are right prisms, with vertical sides parallel to the time axis. All solid parameters inside the elements  $K$  are supposed to be constant, so that all discontinuities lie on the inter-element boundaries.

The mesh skeleton  $\mathcal{F}_h = \cup_{K \in \mathcal{T}_h} \partial K$  can be decomposed into the families of element faces:

$\mathcal{F}_h^I$	internal $I$ -faces	( $x$ - fixed)
$\mathcal{F}_h^\Omega$	internal $\Omega$ -faces	( $t$ - fixed)
$\mathcal{F}_h^D$	external Dirichlet boundary faces	( $\partial\Omega \times [0, T]$ )
$\mathcal{F}_h^0$	external initial time faces	( $\Omega \times \{0\}$ )
$\mathcal{F}_h^T$	external final time faces	( $\Omega \times \{T\}$ )

The space-time DG formulation for (1) consists in searching  $(v_{hp}, \boldsymbol{\sigma}_{hp}) \in \mathbf{V}(\mathcal{T}_h) \subset H^1(\mathcal{T}_h)^d \times H^1(\mathcal{T}_h)^{d^2}$  such that, for all  $K \in \mathcal{T}_h$  and for all  $(\omega, \boldsymbol{\xi}) \in \mathbf{V}(\mathcal{T}_h)$  the following identity holds true:

$$\begin{aligned} & - \int_K \left[ \boldsymbol{\sigma}_{hp} : (\mathbf{A}\partial_t \boldsymbol{\xi} - \boldsymbol{\varepsilon}(\omega)) + v_{hp} \cdot (\rho\partial_t \omega - \operatorname{div} \boldsymbol{\xi}) \right] dv \\ & + \int_{\partial K} \left[ \mathbf{A} \hat{\boldsymbol{\sigma}}_{hp} : \boldsymbol{\xi} n_K^t - \hat{v}_{hp} \cdot n_K^x \boldsymbol{\xi} + \rho \hat{v}_{hp} n_K^t \cdot \omega - \hat{\boldsymbol{\sigma}}_{hp} n_K^x \cdot \omega \right] ds = 0. \end{aligned} \quad (3)$$

The numerical fluxes  $\hat{v}_{hp}$ ,  $\hat{\boldsymbol{\sigma}}_{hp}$  are defined in the standard DG notations [19] on the mesh skeleton  $\mathcal{F}_h$  as follows:

Here  $\delta \in L^\infty(\mathcal{F}_h^I \cup \mathcal{F}_h^D)$  and  $\gamma \in L^\infty(\mathcal{F}_h^I)$  are positive penalty parameters. This choice is recommended in order to improve the numerical stability of the scheme.

We define the Trefftz approximation space, such that the chosen test functions  $(\omega, \boldsymbol{\xi})$  satisfy the initial elastodynamic system in the homogeneous

---


$$\begin{array}{lll}
\mathcal{F}_h^I & \begin{pmatrix} \hat{v}_{hp} \\ \hat{\boldsymbol{\sigma}}_{hp} \end{pmatrix} & \equiv \begin{pmatrix} \{v_{hp}\} - \delta[\boldsymbol{\sigma}_{hp}]_x \\ \{\boldsymbol{\sigma}_{hp}\} - \gamma[v_{hp}]_x \end{pmatrix} \\
\mathcal{F}_h^\Omega & \begin{pmatrix} \hat{v}_{hp} \\ \hat{\boldsymbol{\sigma}}_{hp} \end{pmatrix} & \equiv \begin{pmatrix} v_{hp}^- \\ \boldsymbol{\sigma}_{hp}^- \end{pmatrix} \\
\mathcal{F}_h^D & \begin{pmatrix} \hat{v}_{hp} \cdot \mathbf{n}_K^x \\ \hat{\boldsymbol{\sigma}}_{hp} \mathbf{n}_K^x \end{pmatrix} & \equiv \begin{pmatrix} v_{hp} \cdot \mathbf{n}_K^x - \delta(\boldsymbol{\sigma}_{hp} - \mathbf{g}_D) \mathbf{n}_K^x \\ \mathbf{g}_D \mathbf{n}_K^x \end{pmatrix} \\
\mathcal{F}_h^T & \begin{pmatrix} \hat{v}_{hp} \\ \hat{\boldsymbol{\sigma}}_{hp} \end{pmatrix} & \equiv \begin{pmatrix} v_{hp} \\ \boldsymbol{\sigma}_{hp} \end{pmatrix} \\
\mathcal{F}_h^0 & \begin{pmatrix} \hat{v}_{hp} \\ \hat{\boldsymbol{\sigma}}_{hp} \end{pmatrix} & \equiv \begin{pmatrix} v_0 \\ \boldsymbol{\sigma}_0 \end{pmatrix}
\end{array}$$


---

sense (without source term and boundary conditions):

$$\mathbf{T}(\mathcal{T}_h) \equiv \left\{ (\omega, \boldsymbol{\xi}) \in \mathbf{V}(\mathcal{T}_h) \text{ s. t. } \rho \partial_t \omega - \operatorname{div} \boldsymbol{\xi} = \mathbf{A} \partial_t \boldsymbol{\xi} - \varepsilon(\omega) = 0 \text{ in all } K \in \mathcal{T}_h \right\}.$$

Thanks to this choice of discrete space we remove a volume integration term in (3). Summing over all elements  $K \in \mathcal{T}_h$ , we obtain a space-time Trefftz-DG formulation for (1):

Seek  $(v_{hp}, \boldsymbol{\sigma}_{hp}) \in \mathbf{V}(\mathcal{T}_h)$  such that, for all  $(\omega, \boldsymbol{\xi}) \in \mathbf{T}(\mathcal{T}_h)$ , it holds true:

$$\begin{aligned}
& - \int_{\mathcal{F}_h^I} \left[ \{\boldsymbol{\sigma}_{hp}\} [\omega]_x + \{v_{hp}\} [\boldsymbol{\xi}]_x - \gamma [v_{hp}]_x [\omega]_x - \delta [\boldsymbol{\sigma}_{hp}]_x [\boldsymbol{\xi}]_x \right] ds \\
& + \int_{\mathcal{F}_h^\Omega} \left[ \mathbf{A} \boldsymbol{\sigma}_{hp}^- : [\boldsymbol{\xi}]_t + \rho v_{hp}^- [\omega]_t \right] ds - \int_{\mathcal{F}_h^D} \left[ v_{hp} \cdot \mathbf{n}_K^x \boldsymbol{\xi} - \delta \boldsymbol{\sigma}_{hp} : \boldsymbol{\xi} \right] ds \\
& + \int_{\mathcal{F}_h^T} \left[ \mathbf{A} \boldsymbol{\sigma}_{hp} : \boldsymbol{\xi} + \rho v_{hp} \cdot \omega \right] ds - \frac{1}{2} \int_{\mathcal{F}_h^0} \left[ \mathbf{A} \boldsymbol{\sigma}_{hp} : \boldsymbol{\xi} + \rho v_{hp} \cdot \omega \right] ds = \\
& \frac{1}{2} \int_{\mathcal{F}_h^0} \left[ \mathbf{A} \boldsymbol{\sigma}_{hp} : \boldsymbol{\xi} + \rho v_{hp} \cdot \omega \right] ds + \int_{\mathcal{F}_h^D} \left[ \mathbf{g}_D \mathbf{n}_K^x \cdot \omega + \delta \mathbf{g}_D : \boldsymbol{\xi} \right] ds,
\end{aligned}$$

or, by introducing bilinear  $\mathcal{A}_{TDG}(\cdot; \cdot)$  and linear  $\ell_{TDG}(\cdot)$  operators:

Seek  $(v_{hp}, \boldsymbol{\sigma}_{hp}) \in \mathbf{V}(\mathcal{T}_h)$  such that, for all  $(\omega, \boldsymbol{\xi}) \in \mathbf{T}(\mathcal{T}_h)$ , it holds true:

$$\mathcal{A}_{TDG}((v_{hp}, \boldsymbol{\sigma}_{hp}); (\omega, \boldsymbol{\xi}_{hp})) = \ell_{TDG}(\omega, \boldsymbol{\xi}_{hp}). \quad (4)$$

It is worth mentioning that in addition to its setting at the boundaries of the elements only, the Trefftz-DG formulation does not involve differential operators. It is thus straightforward to implement.

## 1.2 Well-posedness of Trefftz-DG formulation

In this section we show the coercivity and continuity estimates proving well-posedness of the obtained Trefftz-DG method for ES in mesh-dependent norms. We refer to the Appendix B in [21] for more details. The analysis

is carried out inside the framework developed in [14] for the time-dependent Maxwell problem.

We introduce two mesh-dependent norms in  $\mathbf{T}(\mathcal{T}_h)$ :

$$\begin{aligned} |||(\omega, \boldsymbol{\xi})|||_{TDG}^2 &\equiv \frac{1}{2} \|(\mathbf{A})^{1/2} \llbracket \boldsymbol{\xi} \rrbracket_t\|_{L^2(\mathcal{F}_h^\Omega)}^2 + \frac{1}{2} \|\rho^{1/2} \llbracket \omega \rrbracket_t\|_{L^2(\mathcal{F}_h^\Omega)}^2 + \|\gamma^{1/2} \llbracket \omega \rrbracket_x\|_{L^2(\mathcal{F}_h^I)}^2 \\ &+ \|\delta^{1/2} \llbracket \boldsymbol{\xi} \rrbracket_x\|_{L^2(\mathcal{F}_h^I)}^2 + \frac{1}{2} \|(\mathbf{A})^{1/2} \boldsymbol{\xi}\|_{L^2(\mathcal{F}_h^T)}^2 + \frac{1}{2} \|\rho^{1/2} \omega\|_{L^2(\mathcal{F}_h^T)}^2 + \|\delta^{1/2} \boldsymbol{\xi}\|_{L^2(\mathcal{F}_h^D)}^2, \end{aligned}$$

$$\begin{aligned} |||(\omega, \boldsymbol{\xi})|||_{TDG^*}^2 &\equiv |||(\omega, \boldsymbol{\xi})|||_{TDG}^2 + \|\rho^{1/2} \omega^-\|_{L^2(\mathcal{F}_h^T)\mathcal{F}_h^\Omega}^2 + \|(\mathbf{A})^{1/2} \boldsymbol{\xi}^-\|_{L^2(\mathcal{F}_h^T)\mathcal{F}_h^\Omega}^2 \\ &+ \|\delta^{-1/2} \{\omega\}\|_{L^2(\mathcal{F}_h^I)}^2 + \|\gamma^{-1/2} \{\boldsymbol{\xi}\}\|_{L^2(\mathcal{F}_h^I)}^2 + \|\delta^{-1/2} \boldsymbol{\xi}\|_{L^2(\mathcal{F}_h^T)\mathcal{F}_h^D}^2. \end{aligned}$$

Thus, for the bilinear  $\mathcal{A}_{TDG}(\cdot, \cdot)$  and linear  $\ell_{TDG}(\cdot)$  forms we obtain the following coercivity

$$\mathcal{A}_{TDG}((\omega, \boldsymbol{\xi}); (\omega, \boldsymbol{\xi})) = |||(\omega, \boldsymbol{\xi})|||_{TDG}^2, \quad \forall (\omega, \boldsymbol{\xi}) \in \mathbf{T}(\mathcal{T}_h),$$

and continuity properties with respect to the chosen norms.

$$\begin{aligned} |\mathcal{A}_{TDG}((v, \boldsymbol{\sigma}); (\omega, \boldsymbol{\xi}))| &\leq 2 |||(v, \boldsymbol{\sigma})|||_{TDG^*} |||(\omega, \boldsymbol{\xi})|||_{TDG}, \\ |\ell_{TDG}(\omega, \boldsymbol{\xi})| &\leq \sqrt{2} \left[ \|\rho^{1/2} v_0\|_{L^2(\mathcal{F}_h^0)}^2 + \|\mathbf{A}^{1/2} \boldsymbol{\sigma}_0\|_{L^2(\mathcal{F}_h^0)}^2 \right]^{1/2} \quad (\mathbf{g}_D \equiv 0). \end{aligned}$$

The above estimates confirm the well-posedness of the Trefftz-DG problem for ES, moreover:

$$|||(v - v_{hp}, \boldsymbol{\sigma} - \boldsymbol{\sigma}_{hp})|||_{TDG} \leq 3 \inf_{(\omega, \boldsymbol{\xi}) \in \mathbf{V}(\mathcal{T}_h)} |||(v - \omega, \boldsymbol{\sigma} - \boldsymbol{\xi})|||_{TDG^*}.$$

## 2 Numerical implementation

In this Section we discuss the choice of the discrete approximation space, and provide some numerical tests for 2D + time elastic model.

### 2.1 Polynomial basis

The flexibility in the choice of basis functions is one of the advantages of Trefftz-type methods. The main condition is to satisfy the governing equations inside each element. The natural choice in the case of harmonic problems can be the plane wave trigonometric basis. However, when applied to the space-time formulations, it demands a high number of trigonometric functions of different frequencies, in order to provide a better approximation order. Thus, it increases the number of degrees of freedom, and as a result - the global numerical cost of the algorithm.

We have computed a space-time polynomial basis, using generating exponential functions - local solutions of the initial systems of equations (see [20,21] for more details). Numerically speaking, this basis generates a lower computational bound than the standard trigonometric ones. It contains the couples of polynomial functions for velocity - stress, of degrees less or equal to  $n$  ( $n = 0, 1, 2, 3$ ), satisfying the initial ES, to provide an approximation of order  $n$ .


## 2.2 Numerical results

In order to explore the method and its algorithm in general, and to perform some basic numerical tests for its validation, we have developed a prototype MATLAB® code, which is, technically speaking, quite limited.

We consider the elastic medium, represented by a unit square with the Dirichlet conditions at the boundaries. The final time of propagation is  $T = 1$ . The medium parameters are  $\rho_S = 1$ ,  $\lambda = 1$ ,  $\mu = 2$ . All model parameters are dimensionless quantities. We introduce a source term in the center of the medium. The source signal is represented by the Gaussian function, so that it takes approximately 5 elements per wavelength. Zero initial conditions are imposed for the tests.

Figure 1 shows some results of convergence of the (a)  $P$ -velocity and (b)  $S$ -velocity. The convergence curves have been computed for different approximation orders ( $n = 0, 1, 2, 3$ ), and they represent the numerical error as a function of cell size in logarithmic scale.

**Fig. 1.** Convergence of velocities  $v_P$  and  $v_S$  in function of cell size  $h = \Delta x$ .

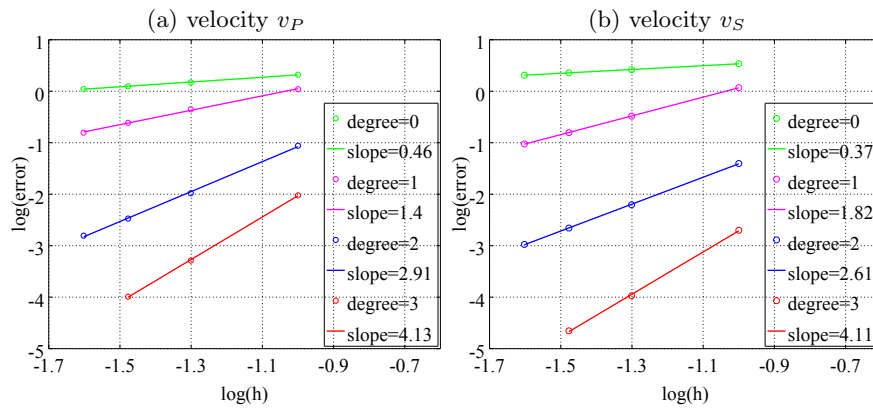

Even though the initial model is limited (large mesh of  $30 \times 30 \times 30$  elements, Dirichlet boundaries, which causes many reflections), the numerics reproduce the expected propagation characteristics quite well, and the convergence in both cases is of order higher than the corresponding approximation order.

## Conclusion

We have applied the theory for Trefftz-DG method to the Elastodynamic System, and we have studied the well-posedness of the problem. The new polynomial basis has been computed for numerical implementation of the

method. The computed numerical solutions have been validated by the analytical ones. The convergence results are of higher order, compared with the classical DG methods.

Even though the obtained results are very promising, from the optimisation point of view, it seems necessary to study the alternative to a global matrix inversion, which brings the main computational cost. We have also in perspective to pass from simple rectangular meshes to more complicate forms (in space domain) - which is one of main advantages of Trefftz-DG methods. It gives the possibility of developing a hybrid method, based on numerical coupling of Trefftz-DG method in Elastics, with less expensive Finite Volume Method (FVM) in Acoustics, in order to create a software able to solve more realistic problems.

## Acknowledgments

This work is supported by the Inria - Total S.A. strategic action "Depth Imaging Partnership" (<http://dip.inria.fr>).

## References

1. E. TREFFTZ. *Ein Gegenstück zum Ritzschen Verfahren*. Proc. 2nd Int. Cong. Appl. Mech., Zurich (1926), 131–137.
2. J. JIROUSEK. *Basis for development of large finite elements locally satisfying all field equations*. Computer Methods in Applied Mechanics and Engineering **14(1)** (1978), 65–92.
3. O. C. ZIENKIEWIC. *Trefftz type approximation and the generalized finite element method - history and development*. Computer Assisted Mechanics and Engineering Sciences **4** (1997), 305–316.
4. C. FARHAT, I. HARARI AND U. HETMANIUK. *A discontinuous Galerkin method with Lagrange multipliers for the solution of Helmholtz problems in the mid-frequency regime*. Computer Methods in Applied Mechanics and Engineering **192(11)** (2003), 1389–1419.
5. R. TEZAUER AND C. FARHAT. *Three-dimensional discontinuous Galerkin elements with plane waves and Lagrange multipliers for the solution of mid-frequency Helmholtz problems*. International journal for numerical methods in engineering **66(5)** (2006), 796–815.
6. G. GABARD. *Discontinuous Galerkin methods with plane waves for time-harmonic problems*. Journal of Computational Physics **225(2)** (2007), 1961–1984.
7. Z. BADICS. *Trefftz-discontinuous Galerkin and finite element multi-solver technique for modeling time-harmonic EM problems with high-conductivity regions*. IEEE Transactions on Magnetics **50(2)** (2014), 401–404.
8. R. HIPTMAIR, A. MOIOLA AND I. PERUGIA. *Plane wave discontinuous Galerkin methods for the 2D Helmholtz equation: analysis of the p-version*. SIAM Journal on Numerical Analysis **49(1)** (2011), 264–284.



9. A. MOIOLA, R. HIPTMAIR AND I. PERUGIA. *Plane wave approximation of homogeneous Helmholtz solutions*. Zeitschrift für Angewandte Mathematik und Physik (ZAMP) **62(5)** (2011), 809–837.
10. R. HIPTMAIR, A. MOIOLA AND I. PERUGIA. *Error analysis of Trefftz-discontinuous Galerkin methods for the time-harmonic Maxwell equations*. Mathematics of Computation **82(281)** (2013), 247–268.
11. S. PETERSEN, C. FARHAT AND R. TEZAUER. *A space-time discontinuous Galerkin method for the solution of the wave equation in the time domain*. International journal for numerical methods in engineering **78(3)** (2009), 275–295.
12. F. KRETZSCHMAR, S. M. SCHNEPP, I. TSUKERMAN AND T. WEILAND. *Discontinuous Galerkin methods with Trefftz approximations*. Journal of Computational and Applied Mathematics **270** (2014), 211–222.
13. H. EGGER, F. KRETZSCHMAR, S. M. SCHNEPP AND T. WEILAND. *A Space-Time Discontinuous Galerkin Trefftz Method for Time Dependent Maxwell's Equations*. SIAM Journal on Scientific Computing **37(5)** (2015), B689–B711.
14. F. KRETZSCHMAR, A. MOIOLA, I. PERUGIA AND S. SCHNEPP. *A priori error analysis of space-time Trefftz discontinuous Galerkin methods for wave problems*. IMA Journal of Numerical Analysis **36(4)** (2015), 1599–1635.
15. D. WANG, R. TEZAUER AND C. FARHAT. *A hybrid discontinuous in space and time Galerkin method for wave propagation problems*. International Journal for Numerical Methods in Engineering **99(4)** (2014), 263–289.
16. L. BANJAI, E. GEORGIOULIS AND O. LIJOKA. *A Trefftz polynomial space-time discontinuous Galerkin method for the second order wave equation*. SIAM Journal on Numerical Analysis **55(1)** (2017), 63–86.
17. A. MOIOLA AND I. PERUGIA. *A space-time Trefftz discontinuous Galerkin method for the acoustic wave equation in first-order formulation*. Numerische Mathematik **138(2)** (2017), 1–47.
18. P. LE TALLEC. *Modélisation et calcul des milieux continus*. Editions Ecole Polytechnique (2009).
19. J. S. HESTHAVEN AND T. WARBURTON. *Nodal discontinuous Galerkin methods: algorithms, analysis, and applications*. Springer Science & Business Media (2007).
20. A. MACIAG AND J. WAUER. *Solution of the two-dimensional wave equation by using wave polynomials*. Journal of Eng Mathematics **51(4)** (2005), 339–350.
21. H. BARUCQ, H. CALANDRA, J. DIAZ AND E. SHISHENINA. *Space-Time Trefftz - Discontinuous Galerkin Approximation for Elasto-Acoustics*. Inria Bordeaux Sud-Ouest, LMAP CNRS, Total EP, **RR-9104** (2017).