

# Deriving Adequate Formulations for Fluid Structure Interaction Problems: from ALE to Transpiration

Thierry Fanion, Miguel Angel Fernández, Patrick Le Tallec

► **To cite this version:**

Thierry Fanion, Miguel Angel Fernández, Patrick Le Tallec. Deriving Adequate Formulations for Fluid Structure Interaction Problems: from ALE to Transpiration. [Research Report] RR-3879, INRIA. 2000. inria-00072774

**HAL Id: inria-00072774**

**<https://hal.inria.fr/inria-00072774>**

Submitted on 24 May 2006

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

*Deriving adequate formulations for fluid structure  
interaction problems: from ALE to transpiration*

Thierry Fanion — Miguel-Angel Fernández — Patrick Le Tallec

**N° 3879**

Février 2000

THÈME 4



*R*  
*apport  
de recherche*



# Deriving adequate formulations for fluid structure interaction problems: from ALE to transpiration

Thierry Fanion\* , Miguel-Angel Fernández†, Patrick Le Tallec‡

Thème 4 — Simulation et optimisation  
de systèmes complexes  
Projet MACS

Rapport de recherche n° 3879 — Février 2000 — 37 pages

**Abstract:** Most formulations describing low speed large displacements fluid structure interaction problems use a totally lagrangian formulation for the structure, and an Arbitrary Euler Lagrange (ALE) formulation for the fluid. The purpose of the present paper is to review the derivation of such formulations, to describe different time discretisation strategies and to explain the type of numerical problems which arise when implementing these techniques. To overcome all technical difficulties arising when dealing with moving grids, we will also explain how an adequate asymptotic expansion can reduce the problem to a standard problem written on a fixed configuration, but using specific transpiration interface boundary conditions. This last formulation is rather popular in the aeronautical community, and will be illustrated by various numerical experiments.

**Key-words:** fluid structure interaction, large deformation, Euler equations, time discretisation, total energy conservation, linearisation, transpiration.

\* Dassault Aviation and INRIA, email: thierry.fanion@dassault-aviation.fr

† INRIA-MACS, email: miguel.fernandez@inria.fr

‡ Ecole Polytechnique and Université Paris-Dauphine, email:  
patrick.letallec@polytechnique.fr

# Obtention de formulations appropriées pour les problèmes d'interaction fluide structure : de l'ALE à la transpiration

**Résumé :** La plus part des formulations de problèmes d'interaction fluide structure en grands déplacements et faible vitesse utilisent une formulation lagrangienne totale pour la structure, et une formulation Arbitrairement Lagrangienne Eulerienne (ALE) pour le fluide. Le but de ce travail est de revoir la dérivation de telles formulations, décrire les différentes stratégies de discrétisation en temps et d'éclaircir le type de problèmes numériques apparaissant dans l'implémentation de ces techniques. Pour surmonter les difficultés techniques provenant de l'utilisation de grilles mobiles, on montrera aussi comment un développement asymptotique adéquat permet de se ramener à un problème standard écrit en configuration fixe, mais avec des conditions de transpiration spécifiques à l'interface. Cette dernière formulation, plutôt en vogue dans le domaine de l'aéronautique, sera illustrée avec quelques expériences numériques.

**Mots-clés :** interaction fluide structure, grandes déformations, équations d'Euler, discrétisation en temps, conservation de l'énergie totale, linéarisation, transpiration.

# 1 Introduction

Low speed large displacement problems where a flexible elastic structure interacts with the flow of an external or internal fluid occur frequently in practice, for example when studying hydraulic shock absorbers, biomedical flows in flexible pipes, aeroelastic instabilities of flexible aircrafts or tall bridges, or ocean flows around very long risers. The numerical challenge is to predict the longterm time evolution and stability of these coupled systems. It turns out that enforcing the kinematic compatibility at the fluid structure interface and updating the geometry of the fluid domain requires a particular care, especially when this must be done within a numerical model which has been discretised in time and space.

The key is to properly respect mass and momentum conservation laws for the coupled fluid structure system considered as a unique continuous medium sticking together because of a kinematic constraint mechanically imposed at the fluid structure interface  $\Gamma^s(t)$ . These conservation laws when transported on a global fixed reference configuration define the mechanical problem to be solved (§2). Consistent time discretisations can then be introduced (§3). The problem is that, as observed in (§4), classical time integration schemes may loose their long term stability properties when used on moving domains, depending on the grid deformation smoothness and on the discretisation error in the equation of mass.

To overcome all technical difficulties arising when dealing with moving grids, we will then explain in §5 how an adequate asymptotic expansion can reduce the problem to a standard problem written on a fixed configuration, but using specific transpiration interface boundary conditions. The efficiency of the resulting formulations will be illustrated by several numerical experiments in three dimensional aeroelasticity. Such transpirations boundary conditions formulations turn out to be quite popular in the engineering community, but up to now they were missing proper mathematical justifications and variational formulations.

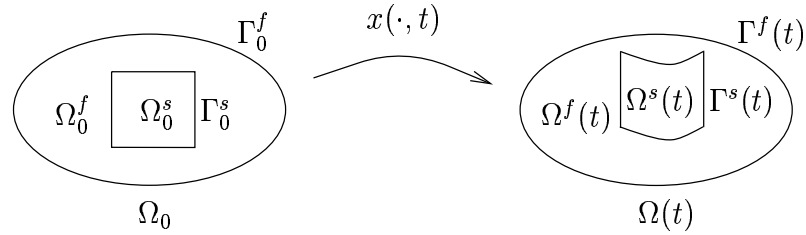


Figure 1: *Geometric configurations: the fixed reference configuration  $\Omega_0$  and the physical configuration  $\Omega(t)$*

## 2 Mechanical problem

The system under study occupies a moving domain  $\Omega(t)$  in its present configuration. It is made of a deformable structure  $\Omega^s(t)$  (plane, civil engineering structure) and of a surrounding fluid in motion in the complement  $\Omega^f(t)$  of  $\Omega^s(t)$  in  $\Omega(t)$  (Figure 1). The problem consists in finding the time evolution of this configuration, of the velocity  $U$  and Cauchy stress tensor  $\sigma$  within the fluid and the structure, and to assess the long term stability of the system. We will suppose here that the fluid is perfect, which means that the normal component of the velocity field must be continuous at the interface. Introducing the velocity field  $U^s = U|_{\Omega^s}$  and  $U^f = U|_{\Omega^f}$  within the structure and the fluid, and the unit normal vector  $n(t)$  to the interface in its present deformed configuration (oriented towards the structure) this kinematic assumption takes the form

$$\text{Tr}(U^s)|_{\Gamma^s} \cdot n(t) = \text{Tr}(U^f)|_{\Gamma^s} \cdot n(t), \quad (1)$$

where  $\text{Tr}$  denotes the kinematic restriction (trace) of the different velocity fields on the interface.

The values of density, velocity and Cauchy stress tensor in the present configuration  $\Omega(t)$  are governed by basic conservation and constitutive laws. Because of the large displacements which are involved, the configuration  $\Omega(t)$  is time dependent. To overcome this difficulty, and to evaluate the strain field or write the elastic constitutive laws inside the structure, one can transport the conservation laws on a fixed reference configuration  $\Omega_0$ , delimited for example

by a given equilibrium configuration of the structure. For this purpose, one must introduce a continuous mapping

$$\begin{aligned} x &: \Omega_0 \times \mathbb{R}^+ \longrightarrow \mathbb{R}^3 \\ (x_0, t) &\longmapsto x(x_0, t) \end{aligned} \quad ,$$

which maps any point  $x_0$  of the fixed configuration  $\Omega_0$  to its image  $x(x_0, t)$  in the present configuration  $\Omega(t)$ . The choice of the configuration  $\Omega_0$  and of the map  $x$  may be arbitrary, hence the name of Arbitrary Lagrangian Eulerian (ALE) formulation which is given to the resulting equations. It is nevertheless more simple [10, 13] to impose that on the structure  $\Omega^s$ , the point  $x(x_0, t)$  corresponds to the present position  $x^s(t)$  of the material point which was located in  $x_0$  at time  $t_0$ . This implies then that the configuration (or grid) velocity  $U^G := \frac{\partial x}{\partial t}|_{x_0}$  (with  $\frac{\partial x}{\partial t}|_{x_0}$  denoting the partial derivative of  $x$  with respect to time at a given fixed position  $x_0$  in the reference configuration) is always equal to the real velocity  $U^s$  of the structure at any point  $x$  of  $\Omega^s$ . On the fluid, the mapping  $x^f$  from  $\Omega_0^f$  onto  $\Omega^f(t)$  is characterised by its nodal values on the discretisation grid and can be any reasonable extension  $x^f = \text{Ext}(x|_{\Gamma_0^s})$  of the material interface deformation

$$x^f = \text{Ext}(x|_{\Gamma_0^s}), \quad \frac{\partial x^f}{\partial t}|_{\Gamma_0^s} = \text{Tr}(U^s)|_{\Gamma_0^s}.$$

The weak form of the conservation laws can now be directly transported on the fixed domain  $\Omega_0$  yielding

$$\begin{aligned} \int_{\Omega_0} \left\{ \frac{\partial J\rho}{\partial t}|_{x_0} + \text{div}_0 [J\rho (U - U^G) F^{-T}] \right\} \hat{q} \, dx_0 &= 0, \quad \forall \hat{q} \in L^2(\Omega_0), \\ &\text{(Mass Conservation)}, \\ \int_{\Omega_0} \left\{ \frac{\partial J\rho U}{\partial t}|_{x_0} + \text{div}_0 [J\rho U \otimes (U - U^G) F^{-T}] \right\} \cdot \hat{U} \, dx_0 \\ + \int_{\Omega_0} J\sigma F^{-T} : \frac{\partial \hat{U}}{\partial x_0} \, dx_0 + \int_{\Gamma_0^s} g_\Gamma \cdot (\hat{U}^s - \hat{U}^f) \frac{da}{da_0} \, da_0 &= \int_{\Omega_0^s} f \cdot \hat{U} \, dx_0 \\ + \int_{\partial\Omega} g \cdot \hat{U} \, da, \quad \forall \hat{U} = (\hat{U}^s, \hat{U}^f) \in V, &\text{(Momentum Conservation)}, \end{aligned}$$



under the notation

$$F = \frac{\partial x}{\partial x_0} = \nabla_0 x, \quad J = \det F, \quad n \, da = J F^{-T} n_0 \, da_0.$$

Above, the velocity test functions are supposed to be arbitrary at the interface, belonging to

$$V = \left\{ \hat{U} = (\hat{U}^s, \hat{U}^f) : \Omega_0 \longrightarrow \mathbb{R}^3; \quad \hat{U}^s \in H^1(\Omega_0^s), \quad \hat{U}^f \in H^1(\Omega_0^f) \right\}.$$

Moreover, the vectors  $f$  and  $g$  represent the external forces applied on the system (we assume for simplicity that there are no body forces on the fluid) and the vector  $g_\Gamma$  denotes the interface stress vector in the present configuration. For an inviscid fluid, the constitutive assumption imposes the stress vector to be normal to the interface

$$g_\Gamma = -p_\Gamma n,$$

the interface pressure being the Lagrange multiplier of the kinematic interface continuity condition (1).

In the above variational formulation, our choice of reference configuration guarantees that we have  $U = U^G$  on the structure. Hence the mass conservation equation reduces there to the identity  $J\rho = \text{constant}$ , and can be omitted in all further calculations. In other words, the conservation of mass is automatically satisfied inside the structure, and must therefore be checked on the fluid domain only.

We must finally specify the different constitutive laws characterizing the materials under study. On the fluid, the constitutive law is more simple to write in the present configuration  $\Omega^f(t) = x^f(\Omega_0^f, t)$

$$\begin{aligned} \int_{\Omega_0^f} \text{div}_0 [J\rho (U^f - U^G) F^{-T}] \hat{q} \, dx_0 &= \int_{\Omega^f(t)} \text{div}_x [\rho (U^f - U^G)] \hat{q} \, dx, \\ &\int_{\Omega_0^f} \text{div}_0 [J\rho U \otimes (U^f - U^G) F^{-T}] \cdot \hat{U} \, dx_0 \\ &= \int_{\Omega^f(t)} \text{div}_x [\rho U^f \otimes (U^f - U^G)] \cdot \hat{U} \, dx, \end{aligned}$$

$$\int_{\Omega_0^f} J \sigma F^{-T} : \frac{\partial \hat{U}}{\partial x_0} dx_0 = \int_{\Omega^f(t)} \{ \mu [\nabla_x U^f + (\nabla_x U^f)^T] - p \mathbf{I} \} : \frac{\partial \hat{U}}{\partial x} dx.$$

The viscosity coefficient  $\mu$  being set to zero when dealing with inviscid fluids.

The integrals on the structure are evaluated on the reference material configuration  $\Omega_0$  and use objective (frame invariant) elastic constitutive laws. When dealing with three dimensional massive hyperelastic structure, the second Piola Kirchhoff stress tensor  $S = J F^{-1} \sigma F^{-T}$  is obtained by differentiating the free energy function with respect to the Green Lagrange strain tensor  $\underline{\underline{E}}$  [10]

$$S(x_0) = \frac{\partial \psi}{\partial \underline{\underline{E}}}(x_0, \frac{\partial x}{\partial x_0}).$$

For such structures, the mass and stiffness integrals take the usual abstract form

$$\begin{aligned} \int_{\Omega_0^s} J \rho \ddot{x}^s \cdot \hat{U} dx_0 &:= m^s(\ddot{x}^s, \hat{U}), \\ \int_{\Omega_0^s} F S : \frac{\partial \hat{U}}{\partial x_0} dx_0 &= \int_{\Omega_0^s} \frac{\partial \psi}{\partial \underline{\underline{E}}}(x_0, \frac{\partial x}{\partial x_0}) : \hat{\underline{\underline{E}}}(\hat{U}) dx_0 := a^s(x^s, \hat{U}), \end{aligned}$$

under the notation

$$\ddot{x}^s = \dot{U}^s = \frac{\partial^2 x^s}{\partial t^2} \Big|_{x_0}, \quad \hat{\underline{\underline{E}}}(\hat{U}) = \frac{1}{2} \left( F^T \frac{\partial \hat{U}}{\partial x_0} + \frac{\partial \hat{U}^T}{\partial x_0} F \right).$$

Similar integrals appear when dealing with more general structures such as elastic beams or shells in large displacements [2]. Altogether, the conservation laws, kinematic constraints and constitutive laws governing the evolution of a fluid structure system take the final form

$$\begin{aligned} \int_{\Omega_0^f} \frac{\partial J \rho}{\partial t} \Big|_{x_0} \hat{q} dx_0 + \int_{x(\Omega_0^f, t)} \operatorname{div}_x [\rho (U^f - U^G)] \hat{q} dx &= 0, \\ \forall \hat{q} : \Omega_0 &\rightarrow \mathbb{R}, \quad (\text{Mass}), \quad (2) \\ \int_{\Omega_0^f} \frac{\partial J \rho U^f}{\partial t} \Big|_{x_0} \cdot \hat{U} dx_0 + \int_{x^f(\Omega_0^f, t)} \left\{ \operatorname{div}_x [\rho U^f \otimes (U^f - U^G)] \cdot \hat{U} \right. & \end{aligned}$$

$$\begin{aligned}
& \left. -p \operatorname{div}_x \hat{U} \right\} dx + m^s(\ddot{x}^s, \hat{U}) + a^s(x^s, \hat{U}) \\
& + \int_{\Gamma_0^s} p_\Gamma J(F^{-T} n_0) \cdot [\operatorname{Tr}(U^f)|_{\Gamma_0^s} - \operatorname{Tr}(U^s)|_{\Gamma_0^s}] da_0 \\
& = \int_{\Omega_0^s} f \cdot \hat{U} dx_0 + \int_{\partial\Omega(t)} g \cdot \hat{U} da, \quad \forall \hat{U} \in V, \quad (\text{Momentum}), \quad (3)
\end{aligned}$$

$$J(F^{-T} n_0) \cdot [\operatorname{Tr}(U^f)|_{\Gamma_0^s} - \operatorname{Tr}(U^s)|_{\Gamma_0^s}] = 0, \quad (\text{kinematic continuity}), \quad (4)$$

$$x^f = \operatorname{Ext}(x^f|_{\Gamma_0}), \quad \frac{\partial x^f|_{\Gamma_0^s}}{\partial t} = \operatorname{Tr}(U^s)|_{\Gamma_0^s}, \quad (\text{fluid configuration map}). \quad (5)$$

These equations completely characterize the evolution of the structural deformation  $x^s \in V^s$ , of the fluid density  $\rho^f J$  in initial configuration, of the pressure  $p \in Q = L^2(\Omega_0^f)$ , of the fluid velocity  $U^f \in V^f$ , of the interface pressure  $p_\Gamma \in W_\Gamma = (H^{1/2}(\Gamma_0))'$ , and of the fluid configuration mapping  $x^f \in V^f$  when complemented by a state law  $p = g(\rho, T)$  relating the pressure  $p$  to the density  $\rho$  and temperature  $T$  inside the fluid, and by adequate initial and boundary conditions. Specific choices of state law or of boundary conditions to be imposed on the external boundary  $\partial\Omega(t)$  will depend of the physical problem under consideration.

Although the above formulation is very general, it reduces the fluid structure interaction to a mathematical minimum: the kinematic condition (4) and the associated kinetic Lagrange multiplier (interface pressure)  $p_\Gamma$  appearing in the global momentum conservation equation when using non kinematically admissible test functions.

**Remark 1** *The above formulation reduces in fact to three coupled subproblems, which are characteristic of fluid structure interaction problems.*

1. *Solving the mass conservation equation, and choosing  $\hat{U}^s = 0$  and  $\hat{U}^f$  arbitrary in the momentum conservation equation (3) while taking into account the kinematic interface boundary condition (4) as specified by the structural problem, we first obtain a standard fluid equation written in ALE form on the moving domain  $\Omega^f(t)$ . The corresponding solution  $U^f$  defines then the interface load  $L_{interface}$  as the residual of these fluid*

equations on the interface

$$\begin{aligned} L_{interface}(\hat{U}|_{\Gamma^s}) &= \int_{\Gamma_0^s} p_\Gamma J(F^{-T} n_0) \cdot \hat{U} \, da_0 \\ &= \int_{\partial\Omega(t) \cap \partial\Omega^f(t)} g \cdot \hat{U}^f \, da - \int_{\Omega_0^f} \frac{\partial J \rho U^f}{\partial t} \Big|_{x_0} \cdot \hat{U}^f \, dx_0 \\ &\quad - \int_{x^f(\Omega_0^f, t)} \left\{ \operatorname{div}_x [\rho U^f \otimes (U^f - U^G)] \cdot \hat{U}^f - p \operatorname{div}_x \hat{U}^f \right\} dx, \end{aligned}$$

where  $\hat{U}$  is any extension of  $\hat{U}|_{\Gamma}$  defined inside  $\Omega^f(t)$ . Since  $U^f$  is solution of the fluid equation, a direct integration by parts reduces this integral to the standard action of the fluid stress vector on the interface

$$L_{interface}(\hat{U}|_{\Gamma^s}) = \int_{\Gamma^s(t)} pn \cdot \hat{U} \, da.$$

The first expression computing the interface load from the fluid equation residual has the major advantage of still making sense after finite element discretisation, and to lead to somewhat more stable numerical results [4].

2. Choosing in (3)  $\hat{U}^f = 0$  and  $\hat{U}^s$  arbitrary in  $V^s$  yields a standard structural problem with imposed traction forces  $L_{interface}$  on the interface (specified by the fluid problem)

$$\begin{aligned} m^s(\ddot{x}^s, \hat{U}^s) + a^s(x^s, \hat{U}^s) &= \int_{\Omega_0^s} f \cdot \hat{U}^s \, dx_0 + \int_{\partial\Omega(t) \cap \partial\Omega^s(t)} g \cdot \hat{U}^s \, da \\ &\quad + L_{interface}(\hat{U}|_{\Gamma^s}), \quad \forall \hat{U}^s \in V^s. \end{aligned}$$

3. The grid configuration map inside the fluid is finally defined by an explicit or implicit equation of the type

$$x^f = \operatorname{Ext}(x|_{\Gamma_0^s}), \quad \frac{\partial x|_{\Gamma_0^s}}{\partial t} = (U^s)|_{\Gamma_0^s},$$

and is coupled to the other subproblems by the condition relating the fluid grid velocity on the interface to the local value of the structural velocity.

**Remark 2** For compressible flows, the above conservation laws must be complemented by an energy equation expressing the conservation of the total energy of the fluid  $E = \rho e + \frac{1}{2}\rho U^2$ . Neglecting any external loads acting on the fluid and any exchange of heat between the fluid and the structure, this equation takes the weak form

$$\begin{aligned} & \int_{\Omega_0^f} \frac{\partial J E}{\partial t} \Big|_{x_0} \hat{q} \, dx_0 - \int_{x^f(\Omega_0^f, t)} [E(U^f - U^G) - \sigma^f U^f + \underline{q}] \cdot \frac{\partial \hat{q}}{\partial x} \, dx \\ & \quad + \int_{\partial\Omega(t) \cap \partial\Omega^f(t)} [E(U^f - U^G) - \sigma^f U^f + \underline{q}] \cdot n \hat{q} \, da \\ & - \int_{\Gamma_0^s} g_\Gamma \cdot \text{Tr}(U^f)|_{\Gamma^s} \hat{q} \, da = 0, \quad \forall \hat{q} : \Omega_0^f \rightarrow \mathbb{R}, \quad (\text{Energy}). \end{aligned} \quad (6)$$

The finite volumes approximation of this equation is then obtained by restricting the test functions  $\hat{q}$  to be piecewise constant.

Total energy conservation is obtained either before or after discretisation by writing this energy equation with  $\hat{q} = 1$ , and by adding to it the structural equation multiplied by the structural velocity  $U^s$ . This cancels the action of the interface force  $g_\Gamma$ , and leads to an energy balance of the type

$$\begin{aligned} & \frac{d}{dt} \left[ \int_{\Omega_0^f} J E \, dx_0 + \int_{\Omega_0^s} \psi(\underline{E}) \, dx_0 + \frac{1}{2} m^s (\dot{x}^s, \dot{x}^s) \right] \\ & = \int_{\Omega_0^s} f \cdot U^s \, dx_0 + \int_{\partial\Omega(t) \cap \partial\Omega^s(t)} g \cdot U^s \, da \\ & \quad + \int_{\partial\Omega(t) \cap \partial\Omega^f(t)} [E(U^f - U^G) - \sigma^f U^f + \underline{q}] \cdot n \, da. \end{aligned}$$

### 3 Time discretisation

We now need to construct a time discretisation scheme respecting the above kinematic compatibility condition at the fluid structure interface, and conserving energy. The simplest choice is to use a first order staggered time integration scheme where the fluid problem is first solved with the explicit kinematic structural interface boundary condition obtained at the previous structural iteration

yielding a new fluid velocity  $U_{n+1}^f$  and interface traction  $L_{n+1}(\hat{U})$ , and where the structural problem is then solved with this imposed traction  $L_{n+1}$  yielding the final prediction of the interface velocity  $(U_{n+1}^s)_{|\Gamma}$  and position  $x_{n+1}^f$ . In this choice, the work developed by the fluid to structure and structure to fluid interface traction forces during the present time step do not cancel because they do not act on the same velocity field. On the fluid side, they act on the structural velocity  $U_{n+1}^f = U_n^s$  at time  $t_n$ ; on the structural side, they act on the present structural velocity  $U_{n+1}^s$ . This error can be reduced to second order by replacing as in [17, 16, 5] the predicted structural velocity  $(\text{Tr } U_{|\Gamma}^s)_n$  by a higher order extrapolation.

An alternate way for getting a better energy conservation [12, 13] is to solve the full system (including the kinematic compatibility condition (4)) at a sequence of discrete times  $t_n, n = 1, \dots$ , using independent finite difference approximations of the various time derivatives. Good accuracy and dissipation properties are obtained by approximating the structural acceleration by a generalised mid point rule (with governing unknown  $x_{n+1/2}^s$ ) [18, 9]

$$\begin{aligned} x_n^s &= \frac{x_{n+1/2}^s + x_{n-1/2}^s}{2}, \\ F_n &= \frac{\partial x_n^s}{\partial x_0}, \quad \hat{\underline{E}}_n(\hat{U}) = \frac{1}{2} \left( F_n^T \frac{\partial \hat{U}}{\partial x_0} + \frac{\partial \hat{U}^T}{\partial x_0} F_n \right), \\ S_n^s &= \frac{1}{2} (S^s(x_{n+1/2}^s) + S^s(x_{n-1/2}^s)), \\ U_n^s &= \frac{x_{n+1/2}^s - x_{n-1/2}^s}{\Delta t_n} = \frac{1}{2} (U_{n+1/2}^s + U_{n-1/2}^s), \\ (\ddot{x}^s)_n &= \frac{U_{n+1/2}^s - U_{n-1/2}^s}{\Delta t_n}. \end{aligned}$$

The acceleration of the fluid on the other hand can be approximated by a wide variety of discretisation schemes such as a standard first order backward Euler scheme

$$\left( \frac{\partial \rho J U^f}{\partial t} \right)_n = \frac{(\rho J U^f)_n - (\rho J U^f)_{n-1}}{\Delta t_n},$$

a second order Gear backward difference [15]

$$\left(\frac{\partial \rho J U^f}{\partial t}\right)_n = \frac{3}{2\Delta t}(\rho J U^f)_n - \frac{2}{\Delta t}(\rho J U^f)_{n-1} + \frac{1}{2\Delta t}(\rho J U^f)_{n-2},$$

or a second order Crank Nicholson formula

$$\left(\frac{\partial \rho J U^f}{\partial t}\right)_n = \frac{(\rho J U^f)_{n+1/2} - (\rho J U^f)_{n-1/2}}{\Delta t_n}.$$

The relevant unknown in this last choice is  $U_{n+1/2}^f$ .

## 4 Energy conservation

Energy conservation is a key point in studying fluid structure interactions. In particular, the evolution of the kinetic energy must be carefully controlled. A time integration of the principle of conservation of momentum taking the real velocity field as test function indicates that the variation of the sum of the kinetic energy of the system and of the elastic energy of the structure must be equal to the difference between the energy introduced by the external boundary conditions and the energy dissipated by viscous effects inside the fluid or developed by the pressure field inside the fluid through compressibility effects. Respecting this energy principle is crucial for preserving stability, and for ensuring the long term accuracy of the numerical predictions. Moreover, this bound on the energy is *the* major tool in the theoretical and numerical analysis of the linearised version of the fluid structure interaction problem [11] following the steps of [3].

Most time integration schemes do violate this principle of energy conservation when dealing with deformable domains. More precisely, for fully coupled schemes using conservative formulations and non volume preserving grid configuration maps  $x^f$ , a small pollution term appears in the kinetic energy conservation principle, which may grow exponentially in time.

To study this energy conservation for the time discrete case, we multiply at each time  $t^n$  the variational equation (3) by  $U_n^f$  on the fluid, and by  $U_n^s$  on

the structure. This choice cancels the action of the interface traction forces  $p_\Gamma$  because the imposed kinematic compatibility condition (4) is exactly satisfied at time  $t_n$  when using totally coupled schemes.

On the structure, the action of  $U_n^s$  on the inertia terms produces the correct variation of kinetic energy

$$\begin{aligned} \left( \frac{\partial U}{\partial t} \right)_n \cdot U_n^s &= \frac{U_{n+1/2}^s - U_{n-1/2}^s}{\Delta t_n} \cdot \frac{U_{n+1/2}^s + U_{n-1/2}^s}{2} \\ &= \frac{|U_{n+1/2}^s|^2 - |U_{n-1/2}^s|^2}{2\Delta t_n}. \end{aligned}$$

On the stiffness terms, it produces the right variation of elastic energy

$$\begin{aligned} &\frac{S^s(x_{n+1/2}^s) + S^s(x_{n-1/2}^s)}{2} \hat{\underline{E}}_n \left( \frac{U_{n+1/2}^s + U_{n-1/2}^s}{2} \right) \\ &= \frac{S^s(x_{n+1/2}^s) + S^s(x_{n-1/2}^s)}{2} \frac{\underline{E}_{n+1/2} - \underline{E}_{n-1/2}}{\Delta t_n} \\ &= \frac{1}{\Delta t_n} \left[ \psi(\underline{E}_{n+1/2}) - \psi(\underline{E}_{n-1/2}) + \frac{\partial^3 \psi}{\partial \underline{E}^3}(\underline{E}_*) (\underline{E}_{n+1/2} - \underline{E}_{n-1/2})^3 \right]. \end{aligned}$$

On the fluid, a direct integration of the inertia terms yields finally

$$I_n^f = \int_{\Omega_0^f} \left( \frac{\partial J \rho U^f}{\partial t} \right)_n \cdot U_n^f + \int_{x^f(\Omega_0, t_n)} \operatorname{div}_x [\rho U^f \otimes (U^f - U^G)]_n \cdot U_n^f.$$

Using direct algebraic manipulations and subtracting the weak equation of mass reduces this integral to

$$\begin{aligned} I_n^f &= \int_{\Omega_0^f} \frac{1}{2} \left( \frac{\partial J \rho |U^f|^2}{\partial t} \right)_n \\ &\quad + \int_{\Omega_0^f} \left[ \left( \frac{\partial J \rho U^f}{\partial t} \right)_n \cdot U_n^f - \frac{1}{2} |U_n^f|^2 \left( \frac{\partial J \rho}{\partial t} \right)_n - \frac{1}{2} \left( \frac{\partial J \rho |U^f|^2}{\partial t} \right)_n \right] \\ &\quad + \int_{x^f(\Omega_0, t_n)} \left( \frac{1}{2} |U_n^f|^2 - \hat{q} \right) \left( \frac{1}{J_n} \left( \frac{\partial J \rho}{\partial t} \right)_n + \operatorname{div}_x [\rho (U^f - U^G)]_n \right). \end{aligned}$$



We do not recover here the exact variation of kinetic energy inside the fluid. Two error terms therefore appear. The last line corresponds to a truncation error

$$e_h = \int_{\Omega^f(t_n)} \frac{\Delta t}{2} \inf_{q_h \in Q_h} \left( \frac{1}{2} |U_n^f|^2 - q_h \right) \left( \frac{1}{J_n} \left( \frac{\partial J \rho}{\partial t} \right)_n + \operatorname{div}_x [\rho(U^f - U_G)]_n \right),$$

which can be made very small by a careful choice of the space of pressure test functions  $Q_h$ . This error disappears for the space continuous problem, and for spatially uniform flows approximated by schemes satisfying the Discrete Geometric Conservation Law (that is exactly satisfying the local conservation of mass for spatially uniform fluids).

The second line is proportional to the truncation error induced by the time discretisation scheme, but the coefficient of proportionality depends on the regularity in time of the map  $\rho J$ , that is in particular on the time regularity of the grid configuration  $x^f$ . In other words, any abrupt changes of  $J$  can lead to large local errors. Actually, this second line can be studied in more details. For a backward Euler scheme, we have

$$\begin{aligned} & \left( \frac{\partial J \rho U^f}{\partial t} \right)_n \cdot U_n^f - \frac{1}{2} |U_n^f|^2 \left( \frac{\partial J \rho}{\partial t} \right)_n - \frac{1}{2} \left( \frac{\partial J \rho |U^f|^2}{\partial t} \right)_n \\ &= \frac{1}{2\Delta t} (\rho J)_{n-1} |U_n^f - U_{n-1}^f|^2. \end{aligned}$$

This term is in fact positive. It can be considered as an additional numerical dissipation and will not affect the stability properties of the scheme. The situation is a bit different for a Crank Nicholson scheme, where the error

$$\begin{aligned} & \left( \frac{\partial J \rho U^f}{\partial t} \right)_n \cdot U_n^f - \frac{1}{2} |U_n^f|^2 \left( \frac{\partial J \rho}{\partial t} \right)_n - \frac{1}{2} \left( \frac{\partial J \rho |U^f|^2}{\partial t} \right)_n \\ &= -\frac{1}{8\Delta t} ((\rho J)_{n+1/2} - (\rho J)_{n-1/2}) |U_{n+1/2}^f - U_{n-1/2}^f|^2. \end{aligned}$$

is of smaller order, but we can no longer control its sign.

**Remark 3** *The time regularity of the grid configuration  $x^f$  also appears in a standard truncation error analysis of the ALE formulation. The map  $x^f$  must satisfy the minimal regularity requirements needed to preserve the accuracy of the time integration scheme.*

## 5 Transpiration

### 5.1 Motivation

The ALE formulations studied up to now has two practical drawbacks. First, at each time step, a new grid  $x^f$  must be built on the fluid domain, and the associated grid velocity  $U^G$  must be computed. We have just seen that both fields must follow the deformation of the structure and be smooth in time and space. Second, the flux vectors  $\phi(W)$  (those appearing inside the divergence terms in the conservation laws) are modified by the ALE formulation, and thus the corresponding flow solvers must be changed in depth.

In order to overcome these drawbacks, and to be able to solve at low cost fluid structure interaction problems at moderate deformation, aeronautical engineers have developed transpiration techniques, from an idea of Lighthill [14], which do not require to update the computational grid or the flux solvers subroutines, but only involve modifications of the interface boundary conditions. These formulations will now be derived and justified mathematically. The main mathematical principle is to write the fluid problem in variational form on the present configuration  $x^f(x_0) = x_0 + \delta x(x_0)$ , working with the fundamental unknown

$$\delta W(x_0) = W(x^f(x_0)) - W_0(x_0) - \nabla_0 W_0(x_0) \delta x(x_0), \quad (7)$$

where  $W_0$  represents the steady state reached by the fluid, when it flows around the structure at rest corresponding to a structural map given by  $x(x_0) = x_0$ . At first order with respect to the interface displacement, this new unknown describes the difference between the reference flow and the present flow at the *same physical point*  $x^f(x_0)$ . More precisely, we are now interested in the linearisation of the coupled problem of fluid structure interaction introduced in section 2, around a steady state corresponding to the reference structural configuration  $x = I$  in  $\Omega_0$ , taking as new unknowns the displacement  $\delta x$  of the domain and the fluctuation  $\delta W$  of the fluid state variables, as defined in (7).

The fluid is supposed to be perfect and compressible and, in order to ensure that the reference configuration is at equilibrium under the action of the

external fluid, we will assume that the residual stress  $\sigma_0^s$  (Piola-Kirchoff's first stress tensor) in this configuration equilibrates the steady state fluid pressure on the interface.

In such a general setting, the unknowns  $x$  and  $W$  satisfy the conservation laws (2), (3) and (6) that we write under the abstract variational form of finding  $W : \Omega_0^f \times \mathbb{R}^+ \rightarrow \mathbb{R}^5$  and  $x : \Omega_0 \times \mathbb{R}^+ \rightarrow \mathbb{R}^3$  such that

$$\begin{aligned} & m^s(\ddot{x}^s, v_2) + \int_{\Omega_0^f} \frac{\partial JW}{\partial t} \Big|_{x_0} \cdot v \, dx_0 \\ & - \int_{\Omega_0^f} J [\phi(W) - W \otimes U^G] F^{-T} : \nabla_0 v \, dx_0 + a^s(x^s, v_2) \\ & = \int_{\Omega_0^s} f \cdot v_2 \, dx_0 + \int_{\Gamma_0^s} U^G \cdot F S n_0^f v_3 \, da_0, \quad \forall v \in \mathcal{D}(\Omega_0)^5, \end{aligned} \quad (8)$$

with boundary conditions

$$\begin{aligned} \phi(W) J F^{-T} n_0^f &= \mathcal{F}(\bar{W}, J F^{-T} n_0^f, W_\infty), \quad \text{on } \Gamma_0^f, \\ W_2 \cdot J F^{-T} n_0^f &= \rho \delta x \cdot J F^{-T} n_0^f, \quad \text{on } \Gamma_0^s. \end{aligned} \quad (9)$$

Here, we have used the notation

$$\begin{aligned} W &= \begin{pmatrix} W_1 \\ W_2 \\ W_3 \end{pmatrix} = \begin{pmatrix} \rho \\ \rho U^f \\ E \end{pmatrix}, \quad v = \begin{pmatrix} v_1 \\ v_2 \\ v_3 \end{pmatrix}, \\ \phi(W) &= \frac{W}{\rho} \otimes W_2 + p \delta_2 + \frac{p}{\rho} \delta_3 \otimes W_2, \end{aligned} \quad (10)$$

with

$$p = (\gamma - 1) \left( E - \frac{W_2 \cdot W_2}{2\rho} \right), \quad \delta_2 = \begin{pmatrix} 0 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & 0 \end{pmatrix}, \quad \delta_3 = \begin{pmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 1 \end{pmatrix},$$

and  $\mathcal{F}(\bar{W}, JF^{-T}n_0^f, W_\infty)$  the imposed flux at infinity, defined by

$$\mathcal{F}(\bar{W}, JF^{-T}n_0^f, W_\infty) = \underbrace{\sum_{\lambda_k > 0} \lambda_k R_k \otimes L_k W}_{A^+} + \underbrace{\sum_{\lambda_k < 0} \lambda_k R_k \otimes L_k W_\infty}_{A^-},$$

where the vectors  $R_k$  and  $L_k$  are respectively the right and left eigenvectors, and  $\lambda_k$  the eigenvalues, of the matrix

$$\frac{\partial \phi}{\partial W}(\bar{W}) JF^{-T}n_0^f,$$

with  $\bar{W} = W_\infty$  or  $\bar{W} = W$  depending on the kind of implementation.

Recall that, in  $\Omega_0^f$ ,  $\delta x$  is arbitrary and can be any reasonable extension of the structural motion inside the fluid domain following the motion of the structure on the interface.

Now we focus on the linearisation of the above problem around the equilibrium steady state corresponding to  $x = I$ . The structure being at equilibrium in this steady state, we have

$$-\int_{\Omega_0^f} \phi(W_0) : \nabla_0 v \, dx_0 + \int_{\Omega_0^s} \sigma_0^s : \nabla_0 v_2 \, dx_0 = \int_{\Omega_0^s} f \cdot v_2 \, dx_0, \quad \forall v \in \mathcal{D}(\Omega_0)^5, \quad (11)$$

together with the kinematic boundary conditions

$$\begin{aligned} \phi(W_0)n_0^f &= \mathcal{F}(\bar{W}, n_0^f, W_\infty), & \text{on } \Gamma_0^f, \\ W_{0,2} \cdot n_0^f &= 0, & \text{on } \Gamma_0^s. \end{aligned} \quad (12)$$

In this linearisation process, the unknowns are the fluctuations  $(\delta W, \delta x)$  of the fluid and of the structure around the reference state  $(W_0, 0)$ , which are produced by given small perturbations of the datas. Such fluctuations are defined as in (7) by

$$\begin{aligned} x &= I + \delta x, & \text{in } \Omega_0, \\ W(I + \delta x) &= W_0 + \nabla_0 W_0 \delta x + \delta W, & \text{in } \Omega_0^f. \end{aligned} \quad (13)$$

and consider the variation of state variables taken at the same frozen physical point  $x_0 + \delta x$ , and hence at two different lagrangian points  $(I + \delta x)^{-1}(x_0) \neq x_0$ .

## 5.2 The steady state problem after transport

The variation being taken at lagrangian point  $(I + \delta x)^{-1}(x_0)$ , we first need to transport the steady state equation

$$\int_{\Omega_0^f} \phi(W_0) : \nabla_0 w \, dx_0 = 0, \quad \forall w \in \mathcal{D}(\Omega_0^f)^5 \quad (14)$$

back to this auxiliary configuration. This is the purpose of the next lemma.

**Lemma 1** *For any smooth displacement  $\delta x \in \mathcal{C}^1(\Omega_0^f)^3$  and solution  $W_0 \in \mathcal{C}^1(\Omega_0^f)^5$  of the equilibrium steady state problem (14), we have*

$$\int_{\Omega_0^f} \underbrace{\left[ \phi(W_0) (\text{I div}_0 \delta x - \nabla_0 \delta x^T) + \frac{\partial \phi}{\partial W}(W_0) (\nabla_0 W_0 \delta x) \right]}_G : \nabla_0 w \, dx_0 = 0, \quad \forall w \in \mathcal{D}(\Omega_0^f)^5. \quad (15)$$

**Proof:** Consider a given test function  $w \in \mathcal{D}(\Omega_0^f)^5$  with support  $K = \text{supp } w$ . We can then construct a compact set  $K_0 \subset \Omega_0^f$ , and a bound  $\varepsilon_0$ , such that the map  $x^\varepsilon = I + \varepsilon \delta x$  is one to one when  $\varepsilon$  is sufficiently small, and satisfies

$$Q^\varepsilon = (x^\varepsilon)^{-1}(K) \subset K_0, \quad x^\varepsilon(K_0) \subset \Omega_0^f, \quad \forall 0 < \varepsilon < \varepsilon_0.$$

By changing variables in the different integrals, we have from (11)

$$\begin{aligned} 0 &= \int_K \phi(W_0) : \nabla_x w \, dx \\ &= \int_{x^\varepsilon(Q^\varepsilon)} \phi(W_0) : \nabla_x w \, dx^\varepsilon \\ &= \int_{Q^\varepsilon} \phi(W_0(x^\varepsilon(x_0))) : \nabla_x w(x^\varepsilon) \frac{dx^\varepsilon}{dx_0} \, dx_0 \end{aligned}$$

$$\begin{aligned}
&= \int_{Q^\varepsilon} \phi(W_0(x^\varepsilon(x_0))) : \nabla_0 w(x^\varepsilon(x_0)) (\nabla_0 x^\varepsilon)^{-1} \frac{dx^\varepsilon}{dx_0} dx_0 \\
&= \int_{Q^\varepsilon} \phi(W_0(x^\varepsilon(x_0))) (\nabla_0 x^\varepsilon)^{-T} : \nabla_0 w(x^\varepsilon(x_0)) \frac{dx^\varepsilon}{dx_0} dx_0 \\
&= \int_{K_0} [\phi(W_0(I + \varepsilon \delta x)) \nabla_0 (I + \varepsilon \delta x)^{-T} : \nabla_0 w(I + \varepsilon \delta x) \\
&\quad \det \nabla_0 (I + \varepsilon \delta x)] dx_0,
\end{aligned}$$

the last equality coming from the fact that  $w(x^\varepsilon(x_0))$  is identically equal to zero outside  $(x^\varepsilon)^{-1}(K)$  since the support of  $w$  is included in  $K$ . At first order in  $\varepsilon$ , the above expression takes the form

$$\begin{aligned}
0 &= \int_{K_0} \phi(W_0) : \nabla_0 w dx_0 + \varepsilon \int_{K_0} \phi(W_0) : \nabla_0 (\nabla_0 w \delta x) dx_0 \\
&\quad + \varepsilon \int_{K_0} \left[ \phi(W_0) (\mathbf{I} \operatorname{div}_0 \delta x - \nabla_0 \delta x^T) + \frac{\partial \phi}{\partial W}(W_0) (\nabla_0 W_0 \delta x) \right] : \nabla_0 w dx_0 \\
&\quad + o(\varepsilon).
\end{aligned}$$

In this expression, the first and second terms correspond to (14) written with test functions  $w$  and  $\nabla_0 w \delta x$  respectively, and therefore cancel. The lemma (15) then follows after division by  $\varepsilon$  and by making  $\varepsilon$  tend to zero.  $\blacksquare$

After integration by parts, the above lemma can also be written under the strong form

$$\operatorname{div}_0 G = 0, \text{ in } \Omega_0^f.$$

By multiplying now this expression by  $v \in \mathcal{D}(\Omega_0)^5$  and by integrating by parts on  $\Omega_0^f$ , we finally obtain

$$\int_{\Omega_0^f} G : \nabla_0 v dx_0 = \int_{\Gamma_0^s} G n_0^f \cdot v da_0, \quad \forall v \in \mathcal{D}(\Omega_0)^5.$$

In other words, after transport, the solution of the steady state problem satisfies the linearised convected problem

$$\int_{\Omega_0^f} \left[ \phi(W_0) (\mathbf{I} \operatorname{div}_0 \delta x - \nabla_0 \delta x^T) + \frac{\partial \phi}{\partial W}(W_0) (\nabla_0 W_0 \delta x) \right] : \nabla_0 v dx_0$$

$$\begin{aligned}
&= \int_{\Gamma_0^s} \left[ \phi(W_0) (\text{I div}_0 \delta x - \nabla_0 \delta x^T) + \frac{\partial \phi}{\partial W}(W_0)(\nabla_0 W_0 \delta x) \right] n_0^f \cdot v \, da_0 \\
&= - \int_{\Gamma_0^s} \left[ \phi(W_0) \eta(\delta x) + \frac{\partial \phi}{\partial W}(W_0)(\nabla_0 W_0 \delta x) n_0^s \right] \cdot v \, da_0, \quad \forall v \in \mathcal{D}(\Omega_0)^5. \quad (16)
\end{aligned}$$

Here  $n_0^s$  denotes the unit normal vector to  $\Gamma_0^s$  (pointing towards the fluid domain) and

$$\eta(\delta x) = (\text{I div}_0 \delta x - \nabla_0 \delta x^T) n_0^s$$

represents at first order the variation  $\eta \, da_0 = n^s \, da - n_0^s \, da_0$  of surface vector  $n_0^s \, da_0$ . In two dimensions, we have simply

$$\eta(\delta x) = \begin{pmatrix} \partial_\tau \delta x_2 \\ -\partial_\tau \delta x_1 \end{pmatrix},$$

with  $\partial_\tau$  representing the tangential derivative along  $\Gamma_0^s$ .

### 5.3 Linearisation method

The linearisation is performed with respect to the fluctuations (7) by subtracting the steady state problem [11] and the linearised convected problem (16) from the initial problem (8) and by neglecting high order terms,

$$(8) - (11) - (16).$$

Let us first consider the time derivatives. Taking into account the definition (7) of the fluctuations, we get

$$\int_{\Omega_0^f} \frac{\partial JW}{\partial t} \Big|_{x_0} \cdot v \, dx_0 = \int_{\Omega_0^f} \frac{\partial J(W_0 + \nabla_0 W_0 \delta x + \delta W)}{\partial t} \cdot v \, dx_0.$$

At first order in  $\delta x$ , the jacobian  $J$  reduces to  $J = 1 + \text{div}_0 \delta x$ , and the above expression becomes

$$\begin{aligned}
\int_{\Omega_0^f} \frac{\partial JW}{\partial t} \Big|_{x_0} \cdot v \, dx_0 &= \int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 + \int_{\Omega_0^f} \left( \text{div}_0 \delta x W_0 + \nabla_0 W_0 \delta x \right) \cdot v \, dx_0 \\
&= \int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 + \int_{\Omega_0^f} \text{div}_0 \left( W_0 \otimes \delta x \right) \cdot v \, dx_0
\end{aligned}$$

$$\begin{aligned}
&= \int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 - \int_{\Omega_0^f} W_0 \otimes \dot{\delta x} : \nabla_0 v \, dx_0 \\
&\quad + \int_{\Gamma_0^s} W_0 \otimes \dot{\delta x} n_0^f \cdot v \, da_0.
\end{aligned}$$

Plugging this expression into the variational problem (8), and using the definition of  $U^G = \delta x$ , we get at first order

$$\begin{aligned}
&\int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 + \int_{\Gamma_0^s} W_0 \otimes \dot{\delta x} n_0^f \cdot v \, da_0 + m^s(\delta \ddot{x}^s, v_2) \\
&- \int_{\Omega_0^f} J \left[ \phi(W_0) + \frac{\partial \phi}{\partial W}(W_0)(\nabla_0 W_0 \delta x) + \frac{\partial \phi}{\partial W}(W_0) \delta W \right] F^{-T} : \nabla_0 v \, dx_0 \\
&\quad + a^s(I + \delta x^s, v_2) = \int_{\Omega_0^s} f \cdot v_2 \, dx_0 + \int_{\Gamma_0^s} \dot{\delta x}^s \cdot F S n_0^f v_3 \, da_0, \\
&\qquad \qquad \qquad \forall v \in \mathcal{D}(\Omega_0)^5. \quad (17)
\end{aligned}$$

By subtracting the steady state problem (11) from this, and by developing the expressions for  $F$  and  $J$ , we get simply at first order

$$\begin{aligned}
&\int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 - \int_{\Omega_0^f} \frac{\partial \phi}{\partial W}(W_0) \delta W : \nabla_0 v \, dx_0 \\
&- \int_{\Omega_0^f} \left[ \phi(W_0) (I \operatorname{div}_0 \delta x - \nabla_0 \delta x^T) + \frac{\partial \phi}{\partial W}(W_0)(\nabla_0 W_0 \delta x) \right] : \nabla_0 v \, dx_0 \\
&\quad + \int_{\Gamma_0^s} W_0 \otimes \dot{\delta x} n_0^f \cdot v \, da_0 + m^s(\delta \ddot{x}^s, v_2) + \delta a^s(\delta x^s, v_2) \\
&\qquad \qquad \qquad = \int_{\Gamma_0^s} \dot{\delta x}^s \cdot \sigma_0^s n_0^f v_3 \, da_0, \quad \forall v \in \mathcal{D}(\Omega_0)^5. \quad (18)
\end{aligned}$$

where

$$\delta a^s(\delta x^s, v_2) = \int_{\Omega_0^s} \left( \frac{\partial FS}{\partial x}(I) \delta x^s \right) : \nabla_0 v_2 \, dx_0,$$

corresponds to the linearisation of the structural elastic constitutive law.

Subtracting now the linearised convected problem (16) satisfied by the steady state  $W_0$ , and using the interface kinetic relation at equilibrium  $\sigma_0^s n_0^f =$



$-p_0 n_0^f$ , we obtain that the perturbation field  $(\delta W, \delta x)$  satisfies the following variational problem:

$$\begin{aligned} & \int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 - \int_{\Omega_0^f} \frac{\partial \phi}{\partial W}(W_0) \delta W : \nabla_0 v \, dx_0 + m^s(\delta \ddot{x}^s, v_2) + \delta a^s(\delta x^s, v_2) \\ & + \int_{\Gamma_0^s} \left[ \delta \dot{x}^s \cdot n_0^f W_0 + \phi(W_0) \eta(\delta x) + \frac{\partial \phi}{\partial W}(W_0) (\nabla_0 W_0 \delta x) n_0^s \right] \cdot v \, da_0 \\ & + \int_{\Gamma_0^s} p_0 \delta \dot{x}^s \cdot n_0^f v_3 \, da_0 = 0, \quad \forall v \in \mathcal{D}(\Omega_0)^5. \end{aligned} \quad (19)$$

In addition, the kinematic boundary conditions (9), once written at first order in terms of  $\delta W$  and  $\delta x$ , reduce to

$$\begin{aligned} \frac{\partial \phi}{\partial W}(W_0) \delta W n_0^f &= \phi(W_0) \eta(\delta x) - \frac{\partial \mathcal{F}}{\partial n}(W_0, n_0^f, W_\infty) \eta(\delta x) \\ -\nabla_0 \phi(W_0) \delta x n_0^f &+ \frac{\partial \mathcal{F}}{\partial W}(W_0, n_0^f, W_\infty) (\delta W + \nabla_0 W_0 \delta x), \quad \text{on } \Gamma_0^f, \end{aligned} \quad (20)$$

$$\delta W_2 \cdot n_0^f = \rho_0 \delta \dot{x}^s \cdot n_0^f - \nabla_0 W_{0,2} \delta x^s \cdot n_0^f + W_{0,2} \cdot \eta(\delta x^s), \quad \text{on } \Gamma_0^s. \quad (21)$$

In the particular case where  $\bar{W} = W_\infty$  and the extension map has no effect on the exterior edge (it means  $\delta x = 0$  on  $\Gamma_0^f$ ) the boundary condition (20) is more simple, in fact we get

$$\frac{\partial \phi}{\partial W}(W_0) \delta W n_0^f = A^+ \delta W, \quad \text{on } \Gamma_0^f,$$

in other words, there is no added incoming flux at infinity.

The kinematic condition (21) and the specific form (10) of the flux function enable us to greatly simplify the interface integrals in (19). Replacing  $\delta \dot{x}^s \cdot n_0^f$  by its expression obtained from (21), and using the explicit form (10) of the flux function first yield

$$\begin{aligned} & \int_{\Gamma_0^s} \left[ \delta \dot{x}^s \cdot n_0^f W_0 + \phi(W_0) \eta(\delta x^s) + (\nabla_0 \phi(W_0) \delta x^s) n_0^s \right] \cdot v \, da_0 \\ & + \int_{\Gamma_0^s} p_0 \delta \dot{x}^s \cdot n_0^f v_3 \, da_0 \end{aligned}$$

$$\begin{aligned}
&= \int_{\Gamma_0^s} \left\{ \frac{W_0}{\rho_0} \left[ \delta W_2 \cdot n_0^f + \nabla_0 W_{0,2} \delta x^s \cdot n_0^f - W_{0,2} \cdot \eta(\delta x^s) \right] \right. \\
&\quad + \left( \frac{W_0}{\rho_0} \otimes W_{0,2} + p_0 \delta_2 + \frac{p_0}{\rho_0} \delta_3 \otimes W_{0,2} \right) \eta(\delta x^s) \\
&\quad \left. - (\nabla_0 \phi(W_0) \delta x^s) n_0^f \right\} \cdot v \, da_0 \\
&\quad + \int_{\Gamma_0^s} \frac{p_0}{\rho_0} \left[ \delta W_2 \cdot n_0^f + \nabla_0 W_{0,2} \delta x^s \cdot n_0^f - W_{0,2} \cdot \eta(\delta x^s) \right] v_3 \, da_0.
\end{aligned}$$

After simplification, and development of  $\nabla_0 \phi(W_0) \delta x^s$ , this integral reduces to

$$\begin{aligned}
&\int_{\Gamma_0^s} \left\{ \frac{W_0}{\rho_0} \left( \delta W_2 \cdot n_0^f + \nabla_0 W_{0,2} \delta x^s \cdot n_0^f \right) + p_0 \delta_2 \eta(\delta x^s) \right. \\
&\quad - \left[ \nabla_0 \left( \frac{W_0}{\rho_0} \right) \cdot \delta x^s \right] \otimes W_{0,2} n_0^f - \frac{W_0}{\rho_0} \otimes (\nabla_0 W_{0,2} \delta x^s) n_0^f \\
&\quad - \nabla_0 p_0 \cdot \delta x^s \delta_2 n_0^f - \nabla_0 \left( \frac{p_0}{\rho_0} \right) \cdot \delta x^s \delta_3 \otimes W_{0,2} n_0^f \\
&\quad \left. - \frac{p_0}{\rho_0} \delta_3 \otimes (\nabla_0 W_{0,2} \delta x^s) n_0^f \right\} \cdot v \, da_0 \\
&\quad + \int_{\Gamma_0^s} \frac{p_0}{\rho_0} \left( \delta W_2 \cdot n_0^f + \nabla_0 W_{0,2} \delta x^s \cdot n_0^f \right) v_3 \, da_0,
\end{aligned}$$

or equivalently, due to cancellation of terms with opposite sign, and due to the interface condition at rest  $W_{0,2} \cdot n_0^f = 0$  on  $\Gamma_0^s$ ,

$$\int_{\Gamma_0^s} \left[ \delta W_2 \cdot n_0^f \frac{W_0}{\rho_0} \cdot v + p_0 \eta(\delta x^s) \cdot v_2 - \nabla_0 p_0 \cdot \delta x^s n_0^f \cdot v_2 + \frac{p_0}{\rho_0} \delta W_2 \cdot n_0^f v_3 \right] da_0.$$

Therefore, the linearised variational problem (19) describing the perturbations  $(\delta W, \delta x)$  of the coupled fluid structured problem finally reduces to the unique variational equation

$$\begin{aligned}
&\int_{\Omega_0^f} \delta \dot{W} \cdot v \, dx_0 - \int_{\Omega_0^f} \frac{\partial \phi}{\partial W}(W_0) \delta W : \nabla_0 v \, dx_0 + \int_{\Gamma_0^s} \left[ \delta W_2 \cdot n_0^f \frac{W_0}{\rho_0} \cdot v \right. \\
&\quad \left. + p_0 \eta(\delta x^s) \cdot v_2 - \nabla_0 p_0 \cdot \delta x^s n_0^f \cdot v_2 + \frac{p_0}{\rho_0} \delta W_2 \cdot n_0^f v_3 \right] da_0 \\
&\quad + m^s(\delta \ddot{x}^s, v_2) + \delta a^s(\delta x^s, v_2) = 0, \quad \forall v \in \mathcal{D}(\Omega_0)^5, \quad (22)
\end{aligned}$$

complemented with the kinematic boundary conditions (20)-(21).

This linearisation leads to a coupled problem written on a fixed configuration  $\Omega_0$ , using standard flux functions  $\phi$ , and totally independent of the extension  $\delta x$  used inside the fluid domain  $\Omega_0^f$ . Therefore, the problem obtained allows us to take into account the effects of the structure, keeping a fixed fluid domain but using non-standard boundary conditions on the fixed interface  $\Gamma_0^s$ . On the one hand, the kinematic condition of continuity of the normal velocity (9) is replaced by a condition of transpiration (21), and on the other hand, the kinetic continuity of traction forces on the interface is modified by the introduction of a correcting term which appear in (16) as a surface integral.

Our method's underlying idea comes from the definition of fluctuations, (13), which leads to the transpiration condition (21), and from the transported problem (16), which enables us to transform the volume integral, with dependencies in  $\delta x$ , into a surface integral on the fixed interface.

## 5.4 Coupled fluid and solid subproblems

The variational formulation (22) is now equivalent to two subproblems coupled along the fixed interface,  $\Gamma_0^s$  (see remark 1). If we take, in (22) a test function  $v$  such that  $v = 0$  in  $\Omega_0^s$ , we recover the standard linearised Euler equations

$$\delta \dot{W} + \text{div}_0 \left( \frac{\partial \phi}{\partial W} (W_0) \delta W \right) = 0, \text{ in } \Omega_0^f, \quad (23)$$

completed with the kinematic condition of transpiration

$$\begin{aligned} \frac{\partial \phi}{\partial W} (W_0) \delta W n_0^f &= \phi(W_0) \eta(\delta x) - \frac{\partial \mathcal{F}}{\partial n} (W_0, n_0^f, W_\infty) \eta(\delta x) \\ -\nabla_0 \phi(W_0) \delta x n_0^f + \frac{\partial \mathcal{F}}{\partial W} (W_0, n_0^f, W_\infty) (\delta W + \nabla_0 W_0 \delta x), &\text{ on } \Gamma_0^f, \\ \delta W_2 \cdot n_0^f &= \rho_0 \delta \dot{x}^s \cdot n_0^f - \nabla_0 W_{0,2} \delta x^s \cdot n_0^f + W_{0,2} \cdot \eta(\delta x^s), \text{ on } \Gamma_0^s. \end{aligned}$$

Alternatively, and this will be the case in the section to come, the fluid subproblem can be replaced at first order by its nonlinear equivalent by adding to

(23) the equation,  $\operatorname{div}_0 \phi(W_0) = 0$ , satisfied in initial state,

$$\begin{aligned} \dot{W} + \operatorname{div}_0 [\phi(W)] &= 0, \quad \text{in } \Omega_0^f, \\ \phi(W)n_0^f &= \phi(W_0)\eta(\delta x) + \mathcal{F}(\bar{W}, JF^{-T}n_0^f, W_\infty) \\ -\nabla_0 \phi(W_0)\delta x n_0^f + \frac{\partial \mathcal{F}}{\partial \bar{W}}(W_0, n_0^f, W_\infty)(\nabla_0 W_0 \delta x), &\quad \text{on } \Gamma_0^f, \\ W_2 \cdot n_0^f &= \rho_0 \delta \dot{x}^s \cdot n_0^f - \nabla_0 W_{0,2} \delta x^s + W_{0,2} \cdot \eta(\delta x^s), \quad \text{on } \Gamma_0^s. \end{aligned}$$

It is easy to prove that the non-standard interface terms which appear in the interface integrals in (22), do not introduce additional boundary conditions in the linear equation of mass or of energy. Moreover, the solution  $\delta W$  defines the interface load as the residual of the fluid equations (see remark 1),

$$\begin{aligned} L_{interface}(v_2|_{\Gamma_0^s}) &= - \int_{\Omega_0^f} \delta \dot{W}_2 \cdot v_2 \, dx_0 + \int_{\Omega_0^f} (-\delta \rho U_0 \otimes U_0 + \delta W_2 \otimes U_0 \\ &\quad + U_0 \otimes \delta W_2 + \delta p \mathbf{I}) : \nabla_0 v_2 \, dx_0. \end{aligned}$$

Since by construction,  $\delta W$  is the solution of the linearised fluid equations, a direct integration by parts reduces this load to the more explicit form

$$L_{interface}(v_2|_{\Gamma_0^s}) = \int_{\Gamma_0^s} \left( U_0 \otimes \delta W_2 n_0^f + \delta p n_0^f \right) \cdot v_2 \, da_0,$$

with

$$\delta p = \frac{\partial p}{\partial W}(W_0) \delta W.$$

The structural subproblem is then simply obtained by using this expression of the residual in the variational problem (22), which yields

$$\begin{aligned} &m^s(\delta \ddot{x}^s, v_2) + \delta a^s(\delta x^s, v_2) \\ &= L_{interface}(v_2|_{\Gamma_0^s}) - \int_{\Gamma_0^s} \left[ \delta W_2 \cdot n_0^f U_0 + p_0 \eta(\delta x^s) - \nabla_0 p_0 \cdot \delta x^s n_0^f \right] \cdot v_2 \, da_0 \\ &= \int_{\Gamma_0^s} \left[ -p_0 \eta(\delta x^s) + \nabla_0 p_0 \cdot \delta x^s n_0^f + \delta p n_0^f \right] \cdot v_2 \, da_0, \quad \forall v_2 \in \mathcal{D}(\Omega_0)^3. \end{aligned}$$

This is the right formulation to be used in any given numerical experiment. Equivalently, after integration by parts, this structural problem can be written

$$\begin{aligned} \delta \ddot{x}^s - \operatorname{div}_0 \left( \frac{\partial FS}{\partial x}(I) \delta x^s \right) &= 0, & \text{in } \Omega_0^s, \\ \left( \frac{\partial FS}{\partial x}(I) \delta x^s \right) n_0^s &= -\delta p n_0^s - \nabla_0 p_0 \cdot \delta x^s n_0^s - p_0 \eta(\delta x^s), & \text{on } \Gamma_0^s. \end{aligned}$$

The coupling with the fluid subproblem appears here on the interface by means of non-standard boundary conditions.

Finally, the configuration subproblem defining the extension of  $\delta x$  inside the fluid domain is no longer needed and therefore disappears from the problem.

## 6 Numerical tests

We will first describe, in the main outlines, the Euler code that validated the ALE and transpiration techniques, then we will present the numerical tests.

We have used the *Dassault Aviation* code "Eugenie" with its three-dimensional steady and unsteady capabilities. This industrial Euler code working on unstructured mono or multi-domain meshes can deal with complex configurations, such as a complete aircraft with its engines. The finite volume cell vertex formulation (see [7]) uses space-centered schemes, especially for transonic flows. Two numerical fluxes are available: the first one is a predictor-corrector flux based on a Lax-Wendroff scheme, and the second is a Peraire flux with second and fourth order artificial viscosity. A dual time stepping technique allows unsteady computations, with a Gear (second order) scheme for the physical time steps and an implicit strategy for the resolution of the local time-stepping unsteady problem.

Comparing to its description in the former section, the practical implementation of the kinematic boundary condition is slightly relaxed in most Euler codes, including Eugenie. More precisely, in the kinematic boundary condition (4), the velocity after transport  $U^f(x^f(x_0))$  is approximated by its value before

transport  $U^f(x_0)$ :

$$U^f(x^f(x_0)) \cdot n(x^f(x_0)) = U^s(x^s) \cdot n(x^s).$$

In other words, the gradient term  $\nabla_0 W_{0,2}$  is neglected. Then, the transpiration kinematic boundary condition reduces to:

$$\begin{aligned} U^f(x^f(x_0)) \cdot n(x^f(x_0)) &= U^f(x_0) \cdot n_0(x_0) + U^f(x_0) \cdot (n(x^f(x_0)) - n_0(x_0)) \\ &= U^s(x^s(x_0)) \cdot n(x^s(x_0)) \end{aligned}$$

This means that in the numerical solver the usual boundary term  $U^f(x_0) \cdot n_0(x_0) = g(x_0)$  will be given by the modified expression

$$g(x_0) = U^f(x_0) \cdot n_0(x_0) - (U^f(x_0) - U^s(x^s)) \cdot n(x^f(x_0)),$$

prescribing weakly the interface transpiration boundary condition.

The Eugenie code has been linearised using the automatic differentiation tool *Odyssée* developed by I.N.R.I.A. (see [6]). Fortran routines corresponding to numerical flux and boundary conditions have been carefully differentiated with respect to the fluid state  $W$  and to a set of input conditions (for instance incidence or slip angles, motion of the body, ...) and were gathered to compute either steady or harmonic solutions. The linear system arising is solved using iterative solvers such as preconditioned G.M.Res., without any local time stepping technique. This approach leads to smaller computation times but requires more memory, especially to store the preconditioner.

This linear code can be interesting in many domains in aerodynamics such as:

1. flight control and stabilisation methods, by predicting sensitivities of some coefficients such as (lift, ...) to variations of aerodynamic parameters (incidence, ...)
2. aerodynamic shape design, by computing the sensitivity of a cost function to a given deformation of a body
3. stability analysis for flutter prediction, which needs generalised aerodynamic forces that can be computed by a harmonic linearised Euler code.

## 6.1 Euler code, steady case

The first test validates the transpiration technique in a transonic steady case. We will compare the pressure coefficients on a Naca64a010 wing (with a supposed infinite span) for a Mach number of 0.796. We compute these coefficients for an incidence of  $-0.21$  degrees (inflow condition) with a transpiration condition which corresponds to an incidence increase of 1 degree. The reference test is the computation of the same coefficients for an incidence angle of  $0.79$  degrees (figure 2). The same strategy is used for an incidence increase of  $0.5$  degrees by transpiration around an incidence of  $-0.21$  degrees, compared to the results obtained with a  $0.29$  incidence angle (figure 3).

We can see that the results obtained by the transpiration method are very good for small variations of incidence, and deteriorate for larger ones.

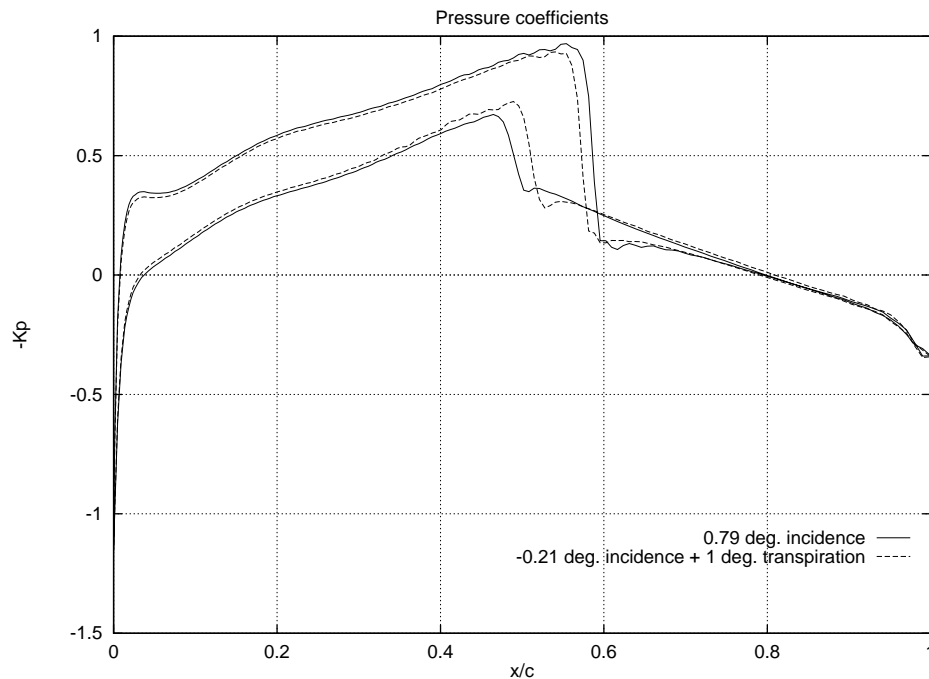


Figure 2: 1 degree by transpiration

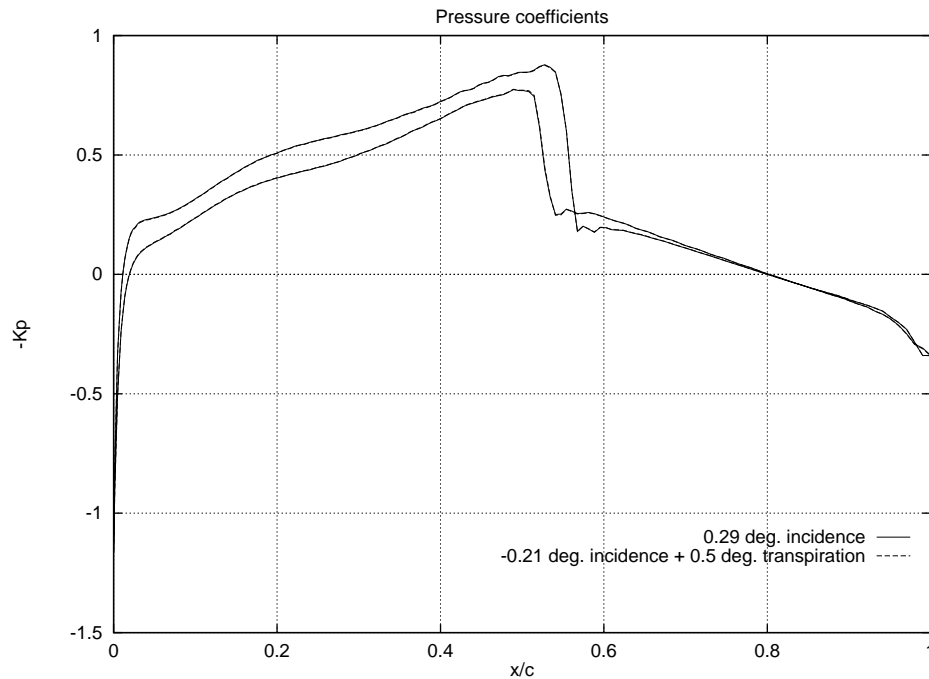


Figure 3: 0.5 degree by transpiration

## 6.2 Euler code, unsteady case

The second test validates both transpiration and ALE techniques. We consider an oscillatory pitch of the Naca64a010 wing in a transonic unsteady flow. We compare, in figures 4 and 5, the real and imaginary parts of the pressure coefficients for different methods: transpiration, ALE with a solid rotation of the mesh and ALE with mesh deformation. Both ALE techniques were used with an second order geometric conservation law (see [8]). For these computations, the oscillatory pitch amplitude chosen was 0.1 degree, the rotation axis was located at  $x/c = 0.24$  (where  $c$  denotes the chord) and the frequency was 17.2 hertz. We have also plotted the experimental datas ([1]) to validate the computational results.

We can see that the three computational methods match quite well the experimental datas. Especially, the shock displacement is well located, even if



the amplitudes are not the same.

From a CPU point of view, the ALE method with a global rotation is nearly thirty percent more expensive than the transpiration technique, while ALE with mesh deformation is much more expensive, due to the huge amount of time spent in the deformation processes.

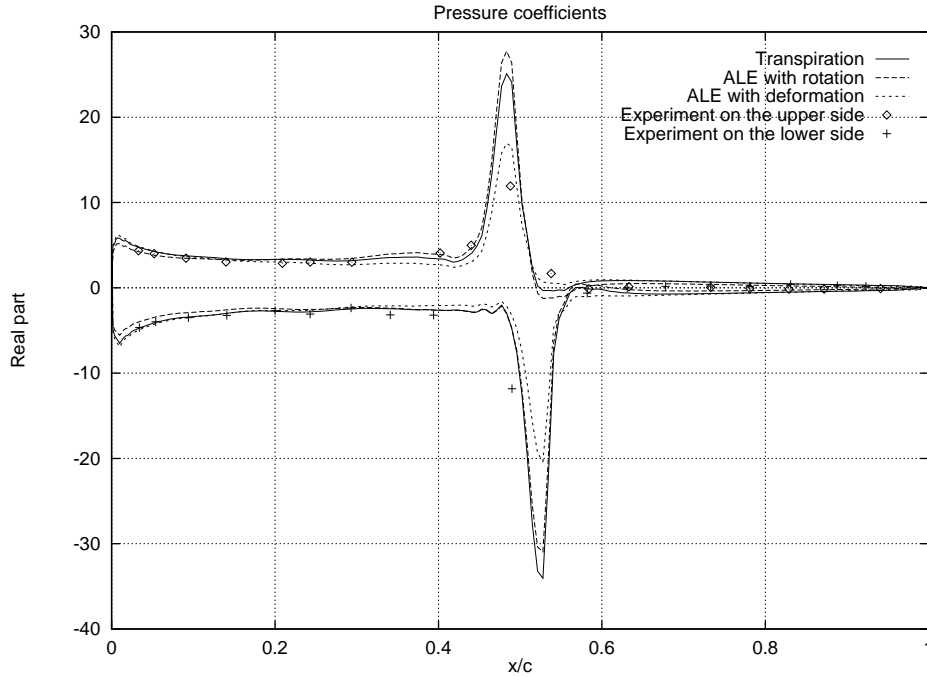


Figure 4: *Real part of the pressure coefficients*

### 6.3 Linearised code, harmonic case

The last computation validates the linearised harmonic code with transpiration conditions in the case of an imposed structural motion. We consider the three dimensional RAE wing with an oscillating flap (see figure 6 and [1] for experimental datas) for a transonic Mach number of 0.9 and a flap frequency of 90 hertz. The mesh contains 228000 tetrahedra and 40000 nodes.

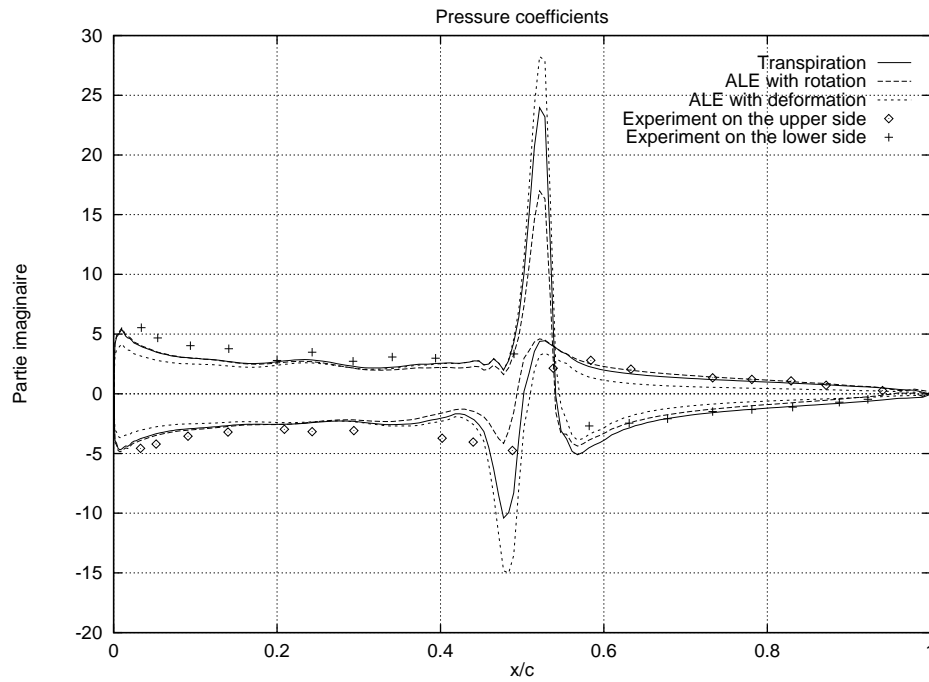


Figure 5: *Imaginary part of the pressure coefficients*

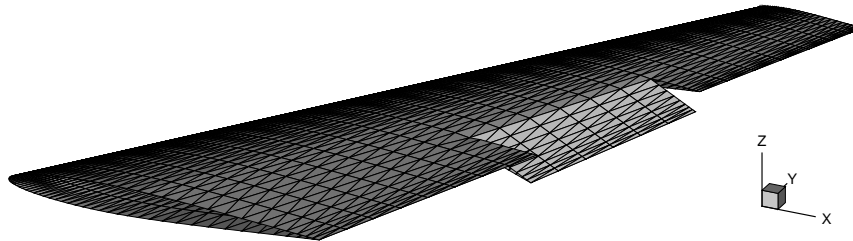


Figure 6: *RAE wing with its flap pulled down*

We present on figures 7 and 8 the real and imaginary parts of the first harmonic of the pressure coefficients on a cutter of the wing (at 45 % of the span) obtained by the linearised Euler code, by the unsteady nonlinear code and by the experiments.

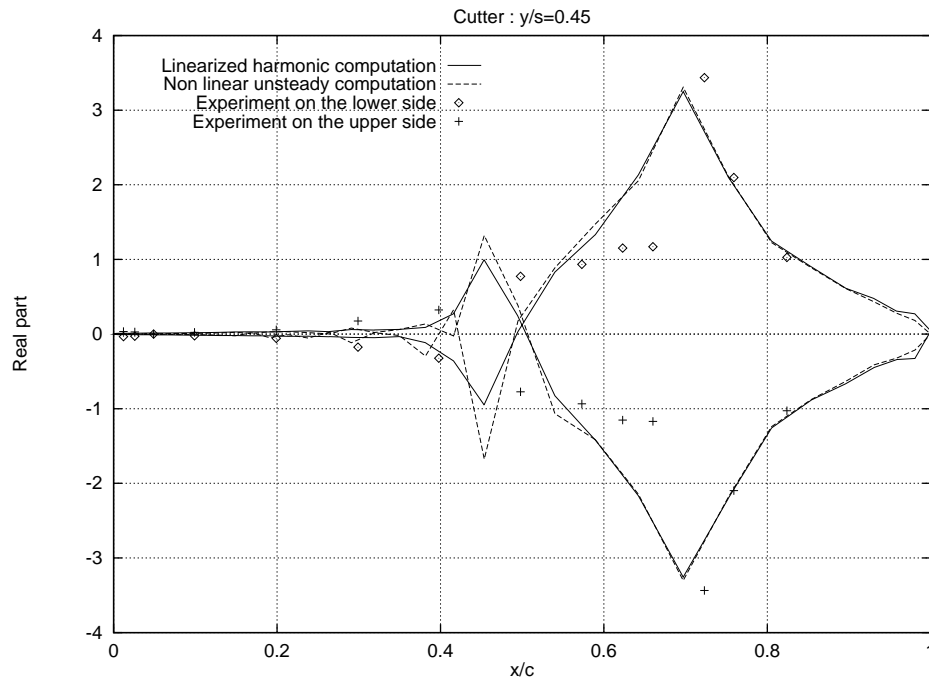


Figure 7: *Real part of the pressure coefficients*

We can see that the linearised harmonic results agree with the unsteady computation. Nevertheless, the mesh seems to be insufficiently refined to obtain a good comparison between computations and experiments.

The CPU gain of the linearised approach depends on the numerical flux used in both linearised and non linear computation. The Lax-Wendroff flux was chosen for the non linear cases, because of its speed and of the quality of its results. Using the same flux in the linearised approach leads to a gain of a factor 2. But if we take the Peraire flux to solve the linearised problem, the CPU time reduces by a factor of 13. Computations on a refined mesh will be required to evaluate the quality of both fluxes, but we can't yet consider bigger geometries for memory requirements reasons (the linearised code has not been parallelised).

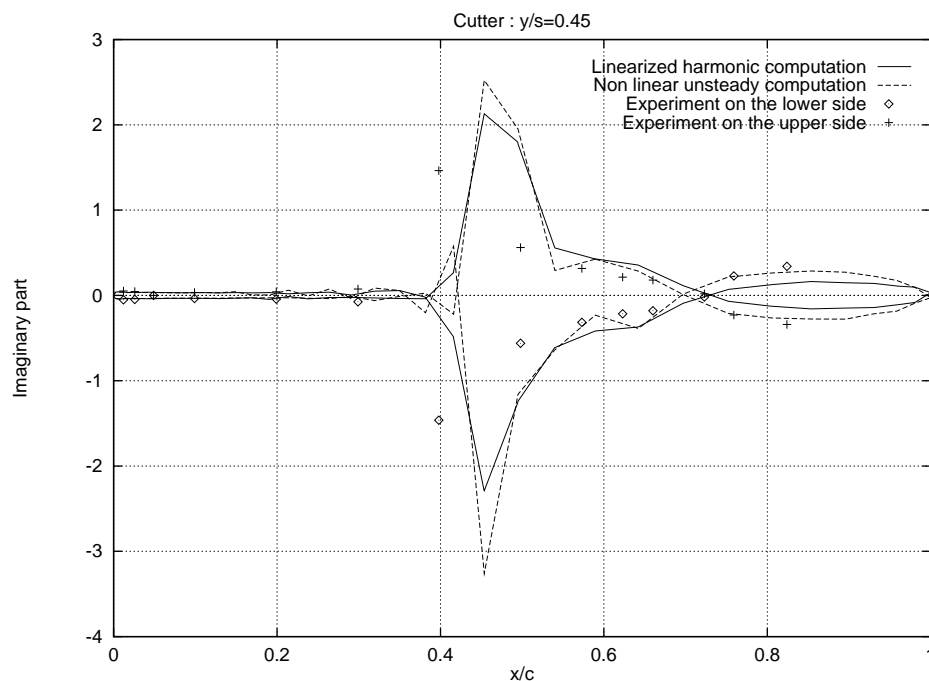


Figure 8: *Imaginary part of the pressure coefficients*

## 7 Conclusion

The analysis presented in this paper may give a better insight on the different formulations used in fluid structure interaction, and on the stability properties of the different time integration schemes used in such problems. We have seen there the importance of using smooth grid deformation maps inside the fluid to preserve long term stability properties.

We also have proposed a mathematical derivation of the so called transpiration interface boundary conditions which seem to be efficient candidates for solving fluid structure interaction problems while keeping a fixed grid and configuration on the fluid domain.

The real numerical issue is in any case to be able to obtain reliable numerical predictions of the physical stability of the coupled problem under study. This can either be carried out by a direct numerical integration in time of the full coupled problem using time accurate schemes with good energy conservation properties, or by computing the harmonic solutions of the linearised variational problem (22).

## References

- [1] AGARD, editor. *Compendium of unsteady aerodynamic measurements*, number 702. Advisory Group for Aerospace Research and Development, North Atlantic Treaty Organization, 1982.
- [2] M. Carrive-Bédouani, P. Le Tallec, and J. Mouro. Approximations par éléments finis d'un modèle de coques minces géométriquement exact. *Rev. Européenne Élé. Finis*, 4(5-6):633–661, 1995.
- [3] R. Dautray and J. L. Lions. *Analyse mathématique et calcul numérique pour les sciences et les techniques*. Collection du Commissariat à l'Energie Atomique. Masson, 1984.
- [4] C. Farhat, M. Lesoinne, and P. Le Tallec. Load and motion transfer algorithms for fluid/structure interaction problems with non-matching discrete interfaces: momentum and energy conservation, optimal discretization and application to aeroelasticity. *Comput. Methods Appl. Mech. Engrg.*, 157(1-2):95–114, 1998.
- [5] C. Farhat and M. Lesoinne. Higher-order staggered and subiteration free algorithm for coupled dynamic aeroelasticity problems. In *AIAA Paper 98-0516, 36th Aerospace Sciences Meeting and Exhibit*, Reno, Nevada, January 1998.
- [6] C. Faure and Y. Papegay. *Odyssée* user's guide version 1.7. Technical Report RT0224, INRIA, 1998.

- 
- [7] L. Fezoui and B. Stoufflet. A class of implicit upwind schemes for Euler simulations with unstructured meshes. *J. Comput. Phys.*, 84(1):174–206, 1989.
- [8] B. Koobus and C. Farhat. Second order implicit schemes that satisfy the gcl for flow computations on dynamic grids. In *AIAA Paper 98-0113, 36th Aerospace Sciences Meeting and Exhibit*, Reno, Nevada, January 1998.
- [9] D. Kuhl and E. Ramm. Generalized energy-momentum method for non-linear adaptive shell dynamics. *Comput. Methods Appl. Mech. Engrg.*, 178(3-4):343–366, 1999.
- [10] P. Le Tallec. *Numerical methods for nonlinear three-dimensional elasticity*, volume III of *Handbook of Numerical Analysis*. North Holland, 1994.
- [11] P. Le Tallec and S. Mani. Analysis of a linearised fluid structure interaction problem. Technical Report 9917, CEREMADE Université de Paris Dauphine, May 1999. To appear in *Numerische Mathematik*.
- [12] P. Le Tallec and J. Mouro. Structures en grands déplacements couplées à des fluides en mouvement. Technical Report RR2961, INRIA, August 1996.
- [13] P. Le Tallec and J. Mouro. Fluid structure interaction with large structural displacements. 1999. To appear in *Computer Methods in Applied Mechanics and Engineering*.
- [14] M. J. Lighthill. On displacement thickness. *J. Comput. Phys.*, 4:383–392, 1958.
- [15] R. Martin and H. Guillard. Second-order defect-correction scheme for unsteady problems. *Computer Fluids*, 25(1):9–27, 1996.
- [16] S. Piperno. *Simulation numérique de phénomènes d'interaction fluide structure*. PhD thesis, Ecole Nationale des Ponts et Chaussées, 1995.
- [17] S. Piperno, C. Farhat, and B. Larrouturou. Partitioned procedures for the transient solution of coupled aeroelastic problems. *Comput. Methods Appl. Mech. Engrg.*, 124:79–111, 1995.

- [18] J. C. Simo and N. Tarnow. The discrete energy-momentum method. conserving algorithms for nonlinear elastodynamics. *Z. Angew. Math. Phys.*, 43(5):757–792, 1992.

---

## Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Introduction</b>                                | <b>3</b>  |
| <b>2</b> | <b>Mechanical problem</b>                          | <b>4</b>  |
| <b>3</b> | <b>Time discretisation</b>                         | <b>10</b> |
| <b>4</b> | <b>Energy conservation</b>                         | <b>12</b> |
| <b>5</b> | <b>Transpiration</b>                               | <b>15</b> |
| 5.1      | Motivation . . . . .                               | 15        |
| 5.2      | The steady state problem after transport . . . . . | 18        |
| 5.3      | Linearisation method . . . . .                     | 20        |
| 5.4      | Coupled fluid and solid subproblems . . . . .      | 24        |
| <b>6</b> | <b>Numerical tests</b>                             | <b>26</b> |
| 6.1      | Euler code, steady case . . . . .                  | 28        |
| 6.2      | Euler code, unsteady case . . . . .                | 29        |
| 6.3      | Linearised code, harmonic case . . . . .           | 30        |
| <b>7</b> | <b>Conclusion</b>                                  | <b>33</b> |





---

Unité de recherche INRIA Rocquencourt

Domaine de Voluceau - Rocquencourt - BP 105 - 78153 Le Chesnay Cedex (France)

Unité de recherche INRIA Lorraine : LORIA, Technopôle de Nancy-Brabois - Campus scientifique  
615, rue du Jardin Botanique - BP 101 - 54602 Villers-lès-Nancy Cedex (France)

Unité de recherche INRIA Rennes : IRISA, Campus universitaire de Beaulieu - 35042 Rennes Cedex (France)

Unité de recherche INRIA Rhône-Alpes : 655, avenue de l'Europe - 38330 Montbonnot-St-Martin (France)

Unité de recherche INRIA Sophia Antipolis : 2004, route des Lucioles - BP 93 - 06902 Sophia Antipolis Cedex (France)

---

Éditeur

INRIA - Domaine de Voluceau - Rocquencourt, BP 105 - 78153 Le Chesnay Cedex (France)

<http://www.inria.fr>

ISSN 0249-6399