



# Flooding Techniques in Mobile Ad Hoc Networks

Emmanuel Baccelli, Philippe Jacquet

► **To cite this version:**

Emmanuel Baccelli, Philippe Jacquet. Flooding Techniques in Mobile Ad Hoc Networks. [Research Report] RR-5002, INRIA. 2003. inria-00077040

**HAL Id: inria-00077040**

**<https://hal.inria.fr/inria-00077040>**

Submitted on 29 May 2006

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



INSTITUT NATIONAL DE RECHERCHE EN INFORMATIQUE ET EN AUTOMATIQUE

# *Flooding Techniques in Mobile Ad Hoc Networks*

Emmanuel Baccelli — Philippe Jacquet

**N° 5002**

November 2003

THÈME 1

A large blue rectangle occupies the lower half of the page. On the left side of this rectangle is a large, light grey 'R' logo. To the right of the 'R', the words 'Rapport de recherche' are written in a white serif font. A horizontal grey brushstroke is positioned below the text.

*Rapport  
de recherche*





## Flooding Techniques in Mobile Ad Hoc Networks

Emmanuel Baccelli\*, Philippe Jacquet †

Thème 1 — Réseaux et systèmes  
Projet Hipercom

Rapport de recherche n° 5002 — November 2003 — 12 pages

**Abstract:** Scarce bandwidth and interferences in mobile ad-hoc networks yield the need for more efficient flooding techniques than these used on usual wired networks. In this paper, we compare some new flooding mechanisms that were proposed. We namely present multi-point relay (MPR) flooding and gateway flooding. We investigate the matter theoretically via mathematical modelling, as well as practically via simulations. It is shown that when the network is dense, more than  $2/3$  of the gateway nodes participate in the retransmissions, while on the other hand the density of multi-point relay retransmitters is  $1/\nu$ , where  $\nu$  is the node density.

**Key-words:** ad hoc networks, wireless networks, broadcast, flooding, optimization

\* Emmanuel.Baccelli@inria.fr

† Philippe.Jacquet@inria.fr

## Optimisations du broadcast dans les réseaux mobiles ad hoc

**Résumé :** Le manque de bande passante et les interférences inhérentes aux réseaux mobiles ad hoc rendent leur approche très différente de celle des réseaux filaires classiques, notamment pour ce qui est du broadcast et de l'inondation. Les techniques classiques, utilisées par exemple dans OSPF, doivent être reconsidérées dans cet environnement particulier. Dans cet article, nous présentons deux nouvelles techniques proposées récemment, et nous les comparons.

**Mots-clés :** réseaux ad hoc, réseaux sans fils, broadcast, inondation, optimisation

## 1 Introduction

Mobile ad hoc networking is the emergent concept in view to interconnect wireless devices from computers to mobile phones, and from sensors to vehicles. Since higher radio link capacity implies shorter radio ranges in ground communications, the routing protocol used between mobile nodes is the key network feature. Still, radio bandwidth is limited compared to that of wired networks and therefore the reduction of routing overhead is an essential issue. Flooding (*i.e.* distributing some information to each and every node in the network) is a big part of the routing overhead, and the techniques used in wired networks are rather brutal: basically, from the source, each node redistributes the information to all its neighbours and so on until the entire network is inundated. This is namely the case with classic protocols like OSPF or IS-IS (see [5] [6]).

When the network is dense, this approach leads to too much overhead: not only are most retransmissions actually unnecessary, but even a single broadcast could break the network down in an ad-hoc environment, where the scarce bandwidth and the radio interferences between users will jam the traffic. This leaves room for optimization, which is absolutely needed in view to develop efficient ad-hoc networking (see [3]), and which might also be of some use on usual wired networks.

There are many proposals as far as ad-hoc routing protocols are concerned, many of them in the IETF framework within the MANET Working Group [2]. Most of these protocols depend on a flooding mechanism at some point in their algorithm. In the present paper we focus on the broadcast performances of two techniques: multi-point relays (MPR) and gateway nodes. These are extracted from two different routing protocols that were proposed: OLSR (Optimized Link State Routing [1]) and DDR (Distributed Dynamic Routing [4]).

The paper is organized as follows : we will first describe simply each of the two flooding mechanisms in Section 2 and 3, before comparing their abilities via mathematical modelling in Section 4. Section 5 will present the results we obtained via simulation before we conclude on the matter.

## 2 Gateway Flooding Mechanism

Gateway node flooding is a broadcast technique which is extracted from the ad-hoc routing protocol DDR. The protocol uses a forest of logical trees interconnected between them via a set of gateway nodes as foundation for its broadcast mechanism.

More precisely, the protocol initially forms trees in the following way: each node selects as parent its preferred neighbour, *i.e.* the neighbour which has itself the maximum number of neighbours, in other words, the maximum degree. A node which is a local maximum degree-wise (all its neighbours have lower degree) is then the root of its tree. Inside a tree

a node is either a leaf or an internal node. A leaf is a node which is parent of none of its neighbours. On the other hand, an internal node is a node which is parent of at least one of its neighbours.

Under such considerations, the network can be viewed as a so-called forest, *i.e.* a collection of disconnected logical trees, each of them being identified by a random identifier which is flooded from root to leaves via the logical links. In order to interconnect those trees, one considers the gateway nodes between them, a gateway node being a node which has neighbours in its range that are in a different tree than its own.

Therefore, the broadcast mechanism can be summed up as follows:

*A node retransmits a broadcast packet if it is either a gateway node or an internal node in the tree it belongs to.*

### 3 MPR Flooding Technique

Multipoint relay (MPR) flooding is a broadcast mechanism which is extracted from the ad-hoc routing protocol OLSR. We will describe it now: the principle is that each node features a multipoint relay set (*i.e.* a subset of its neighbours), and only these selected neighbours, the so-called multipoint relays of the node, will retransmit a packet broadcasted by the node. Obviously, the smallest this set is, the more efficient the optimization will be.

More precisely, this is done in a distributed fashion as follows. Let  $A$  be a given node in the graph. Let the neighbourhood of  $A$  be the set of nodes which have an adjacent link to  $A$ . And let the two-hop neighbourhood of  $A$  be the set of nodes which don't have a valid link to  $A$  but that have a valid link to the neighbourhood of  $A$ . Note that the information about the two-hop neighbourhood and the two-hop links can be made available simply via hello packets, like in OLSR for instance, with every neighbour of  $A$  periodically broadcasts information about their adjacent links in order to continuously cross-check them as valid or invalid, as well as discover new ones.

The multipoint relay set of  $A$ ,  $\text{MPR}(A)$ , is then a subset of the neighbourhood of  $A$  which satisfies the following condition: every node in the two-hop neighbourhood of  $A$  must have a valid link toward  $\text{MPR}(A)$ . As we already stated, the smaller the multipoint relay set (*i.e.* MPR set), the more the broadcast mechanism is optimized.

In a nutshell, the MPR flooding mechanism works as follows, in a distributed fashion, on each node:

*A node retransmits a broadcast packet only if it receives its first copy from a neighbour that has chosen the node as multipoint relay.*

## 4 Performance Evaluation via Mathematical Modelling

The comparison parameter we consider is the number of retransmissions of a single packet via each broadcast technique. The model under which we investigate the performance of these flooding mechanisms is the unit disk model, *i.e.* nodes are randomly dispatched uniformly on a map and the network graph is then the network obtained by connecting nodes which are at a distance smaller than or equal to the unit. The density of nodes is  $\nu$ , which is the average number of nodes contained in an unit disk. In other words,  $\nu$  is the average number of neighbours of a random node. This model is a classic in the field of performance analysis of wireless networks, although not fully realistic since it omits interferences with obstacles and between simultaneous transmitters. Notice that the number of nodes that is contained in an region of size  $a$  is a Poisson distribution of mean  $a\nu$ . We investigate dense networks, *i.e.* mathematically when  $\nu \rightarrow \infty$ .

In the present analysis we will restrict our mathematical model to the linear map, *i.e.* the model addresses networks with geographic locations that mainly stretch on a single geometric dimension, *e.g.* a road. Note that the simulation results presented in Section 5 show figures for both the linear map and the planar map, where the network can stretch in two dimensions, therefore interpolating to most of the real cases.

### 4.1 Gateway Flooding

Our aim is to find the probability for a random node to be a gateway node. Gateway flooding introduces the so-called preferred neighbour of a given node, which is its neighbour with largest degree, *i.e.* the neighbour that has itself the largest number of neighbours. When several neighbours attain this maximum, the node selects the one with largest ID. The selection criterion is thus said to be (degree, ID). A node selecting itself as its preferred neighbour corresponds to it being a local maximum with respect to the selection criterion. Such a local maximum is therefore the root of its region tree.

In the following subsections we gather some mathematical results about the density of trees and the proportion of gateway nodes via the analysis of local maxima distribution with various selection criteria (degree and ID).

#### 4.1.1 Density of Trees

In this section we evaluate the tree density, which corresponds to the distribution of local maxima for the selection criterion. As mentioned earlier, there are two distinct criteria: ID and degree. Note that the local maxima distributions vary depending on the criterion.

**Theorem 1** *The probability that a node is a local maximum for the ID selection criterion is  $\frac{1}{\nu} + O(e^{-\nu})$  in the case of the unit disk graph model in dimension 1.*



**Proof** - Without loss of generality we can assume that IDs are uniformly distributed in the interval  $(0, 1)$ . The probability that a node with ID equal to  $x$  is a local maximum is  $\exp(-(1-x)\nu)$ . Therefore the unconditional probability that a node is local maximum is  $\int_0^1 \exp(-(1-x)\nu) dx = \frac{1-e^{-\nu}}{\nu}$ . This is exponentially close to  $1/\nu$ . From this result we can say that the density of trees is in this case close to 1 per neighbourhood area, in other words the average interval covered by a tree is 1.

**Theorem 2** *The probability that a node is a local maximum for the degree selection criterion is equivalent to  $\frac{2}{\pi\nu}$  when  $\nu$  increases.*

A corollary of the previous theorem is that the average density trees in this case is close to  $\frac{2}{\pi}$  per neighbourhood area, which is less than with the ID criterion.

**Lemma 1** *Right maxima and left maxima are independent events.*

**Proof** - Let  $N(x)$  be the number of neighbours of a node at location  $x$  on the segment map. Let  $I([a, b])$  be the number of nodes contained by interval  $[a, b]$ . Therefore  $N(x) = I([x-1, x+1])$ . Let  $\delta(x) = N(x) - N(0)$ . If  $x \in [0, 1]$ , then we have  $\Delta(x) = I([-1, -1+x]) - I([1, 1+x])$ . If  $x \in [-1, 0]$  then  $\Delta(x) = I([-1+x, -1]) - I([1+x, 1])$ . Since the intervals don't overlap then  $\Delta(x)$  and  $\Delta(y)$  are independent when  $x$  and  $y$  have different signs.

**Theorem 3** *The probability that a node is a right maxima is equivalent to  $\sqrt{\frac{2}{\pi\nu}}$  when  $\nu$  increases.*

**Lemma 2** *Let  $P(\nu)$  be the probability that a node is a right maxima, we have*

$$\int_0^\infty P(\nu)e^{-\omega\nu} d\nu = \frac{\sqrt{(1+\omega)^2 - 1}}{\omega} - 2. \quad (1)$$

**Proof** - Having  $\Delta(x) \geq 0$  for all  $x \in [0, 1]$  is equivalent to an M/M/1 system with service rate and arrival rate equal to 1, starting with one customer, and that does not empty its queue during a time interval of  $\nu/2$ . Let  $f(\omega)$  be the Laplace transform of the distribution of the time  $T$  needed to empty the queue  $f(\omega) = E[e^{-\omega T}]$ . Let  $\theta$  be the time needed for the exit of the first customer, we have from classic queuing theory:

$$T = \theta + N_\theta \times T \quad (2)$$

where  $N_\theta$  is a Poisson random variable of mean  $\theta$  and  $N \times T$  means the addition of  $N$  independent copies of  $T$  ( $N$  i.i.d. variables distributed as  $T$ ). Therefore:

$$f(\omega) = \int_0^\infty P(\theta = x)e^{-x\omega} e^{xf(\omega)-x} dx \quad (3)$$

$$= \frac{1}{2 + \omega - f(\omega)}. \quad (4)$$

**Lemma 3** *Quantity*  $P(\nu) \sim \sqrt{\frac{2}{\pi\nu}}$ .

**Proof** - We have:

$$P(\nu) = \frac{1}{2i\pi} \int_{-i\infty}^{+i\infty} \frac{(1-f(\omega))}{\omega} e^{\omega\nu/2} d\omega. \quad (5)$$

Using the fact that  $f(\omega) \sim \sqrt{\omega} + O(\omega)$  when  $\omega \rightarrow 0$  we have from Flajolet and Odlyzko [7]:

$$\frac{1}{2i\pi} \int_{-i\infty}^{+i\infty} \frac{(1-f(\omega))}{\omega} e^{\omega y} d\omega \sim \frac{\Gamma(1/2)}{\pi} y^{-1/2}. \quad (6)$$

#### 4.1.2 Density of Gateway Nodes

In this section we evaluate the density of gateway nodes in a forest of trees formed with the ID selection criterion. As seen in the previous section, this criterion yields more trees and likely, more gateways nodes than the (degree, ID) selection criteria used in gateway flooding. However, we believe that this gives a good idea of what kind of density we can expect, and we confirm this with the simulations in section 5.

Once again, without loss of generality we will assume that the identifiers of the nodes are randomly uniformly distributed between 0 and 1.

**Theorem 4** *When the preferred neighbour is the one with highest ID, the probability that a randomly picked node is a gateway node is larger than  $\frac{2}{3} + O(\frac{1}{\nu})$ , when the network follows the unit disk model in dimension 1.*

**Proof** - If a node is not root for its tree, then its preferred node is either in the left part of its neighbourhood or in the right part. Let us call a node with preferred neighbour on its left, a leftist node. Conversely, we will call a node with preferred neighbour on its right, a rightist node. A centrist node, which is a node that is both leftist and rightist, is then root for its tree. Note that when a node is leftist, then the root of its tree is in the left part of the network, but not necessarily in its neighbourhood.

A sufficient condition for a leftist node to be a gateway node is to have a rightist node in the right part of its neighbourhood. Indeed, if all the right neighbours belonged to the same tree, then they would all be leftist.

Let us consider a random node  $A$  at a position  $y$  on the network map. We split the interval  $[y-1, y+1]$  into four parts of equal size:  $I_1 = [y-1, y-\frac{1}{2}]$ ,  $I_2 = [y-\frac{1}{2}, y]$ ,  $I_3 = [y, y+\frac{1}{2}]$ ,  $I_4 = [y+\frac{1}{2}, y+1]$ . Let  $x_k$  be the greatest identifier in the interval  $I_k$ .

Neglecting the cases when these numbers are not all different (with probability  $O(\frac{1}{\nu})$ ) we consider the order of the sequence  $(x_1, x_2, x_3, x_4)$ . If  $x_2 > x_3$  then the node  $A$  is leftist. If  $x_3 < x_4$  then the rightmost node which has a position smallest to  $y + \frac{1}{2}$  is rightist, excepted

if it is not neighbour of the node that has identifier  $x_4$ , which occurs with probability  $O(\frac{1}{\nu})$ . Therefore all orders such that either  $x_2 > x_3 < x_4$  (right case) or  $x_1 > x_2 < x_3$  (left case) imply with probability  $1 - O(\frac{1}{\nu})$  that the node  $A$  is a gateway node.

Let  $s_k$  be the order of  $x_k$  in sequence  $(x_1, x_2, x_3, x_4)$ . If  $x_k$  is the largest number then  $s_k = 1$ , if it is the second largest number then  $s_k = 2$ , etc. We call  $T$  the order tuple  $(s_1, s_2, s_3, s_4)$ . If  $x_1 > x_2 > x_3 > x_4$  then  $T = (1, 2, 3, 4)$ . The tuples that correspond to the right case are:

$(1, 2, 4, 3), (1, 3, 4, 2)$
$(2, 1, 4, 3), (2, 3, 4, 1)$
$(3, 1, 4, 2), (3, 2, 4, 1)$
$(4, 1, 3, 2), (4, 2, 3, 1)$

The left case is symmetric, therefore there are 16 order tuples that lead node  $A$  to be a gateway node with probability  $1 - O(\frac{1}{\nu})$ . Given that there are  $4! = 24$  order tuples and that they are all equiprobable, the node  $A$  is a gateway node with probability greater than  $\frac{2}{3} + O(\frac{1}{\nu})$ .

## 4.2 MPR Flooding

Conversely, our goal is now to find the probability for a random node to be used as a multi-point relay during a flooding.

**Theorem 5** *The probability for a random node to retransmit during an MPR flooding is  $\frac{1}{\nu} + O(\frac{1}{\nu^2})$ , when the network follows the unit disk model in dimension 1.*

In the linear map case, the number of MPR per any given node is exactly 2: one at each end of its neighbourhood segment, right and left. When a flooding occurs, a packet is retransmitted via MPR on the right side and on the left side of the segment: retransmissions jump from one MPR to another MPR, with hops of length equal to the radio range. Therefore, the number of retransmitters that participate in an MPR flooding sums up to exactly 2 nodes per neighbour segment length (*i.e.* radio range).

## 5 Performance Evaluation via Simulation

In parallel with the theoretical modelling, we have also carried out simulations to evaluate the density of broadcast retransmitters in the case of MPR flooding on the one hand and gateway flooding on the other hand. The simulations implement the unit disk model, as in the analysis in Section 4. However, we have simulated both the one-dimensional road map and the two-dimensional planar map cases, in view to validate our theoretical results for the road map, as well as further, to extrapolate to the two-dimensional case.

## 5.1 Gateway Simulations

The simulations for the road map confirm the predictions of the mathematical models of section 4.1. Roughly, when the density is such that on average, a given node has more than a dozen neighbours, more than half of the nodes are retransmitting broadcasts in the end, *i.e.* counting retransmissions inside the trees (the internal nodes) and retransmissions *between* trees (the gateway nodes). This is shown in Figure 1, where the total percentage of retransmitters as well as the percentage of gateway nodes alone (dashed) are plotted.

Though we didn't prove anything mathematically in the two dimensions, we can anticipate intuitively that it will turn out to be even worse than with one dimension in terms of number of retransmissions. The simulations for the planar map are consistent with this intuition as they show that when the density is such that on average, a given node has more than a dozen neighbours, more than  $2/3$  of the nodes participate in the broadcast retransmissions. And when the density is higher, up to  $3/4$  of the nodes turn out to be retransmitters. Once again, as with only one dimension, the vast majority of these are gateway nodes as shown in Figure 2, where the total percentage of retransmitters as well as the percentage of gateway nodes alone are plotted.

It is obvious that retransmissions within a tree are pretty much optimized, as the protocol specifically designed it to be. The simulations confirm this point, with very reasonable numbers for internal retransmitters. On the other hand, as we have already stated, the number of gateway retransmitters between trees is very substantial and this because not at all optimized in the flooding mechanism specifications. There is indeed a vacuum here, and the protocol would very much benefit from further specifications on this point, if possible.

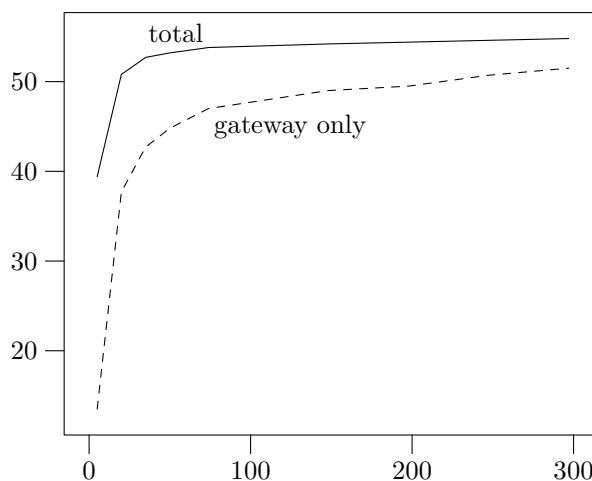


Figure 1: Percentage of gateway retransmitters in the one-dimension case

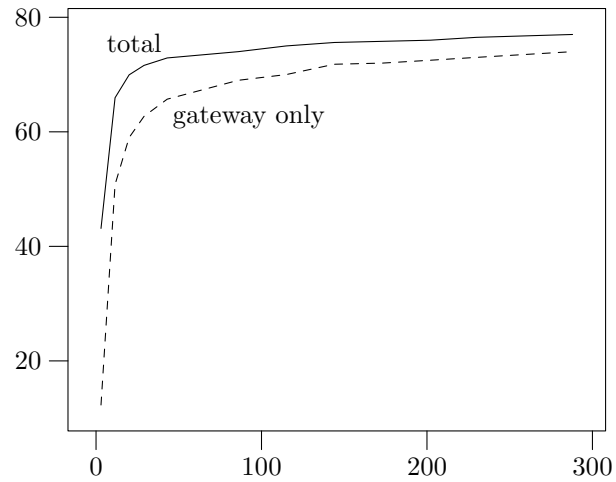


Figure 2: Percentage of gateway retransmitters in the two-dimensional case

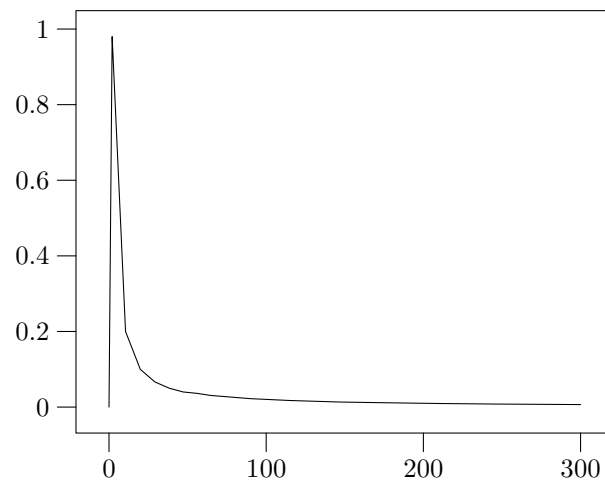


Figure 3: Percentage of MPR retransmitters in the one-dimension case

## 5.2 MPR Simulations

The simulations for the road map confirm the mathematical model of section 4.2. The percentage of retransmitters decreases when the density increases in a way that is roughly proportional to  $1/\nu$ . This is shown in Figure 3.

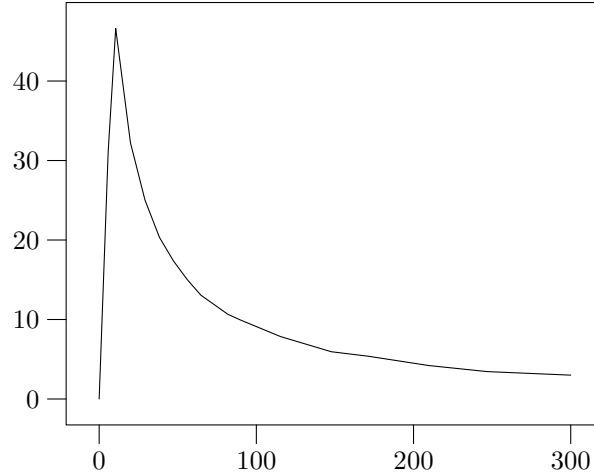


Figure 4: Percentage of MPR retransmitters in the two-dimensional case

Once again, we didn't prove anything mathematically for the planar map, but we anticipate that the behaviour will roughly hold. Indeed, the simulations for the planar map show that the highest percentage of retransmitters is about 45%, which coincides with a density of a dozen neighbours. On the other hand, for higher densities, the model seems to be confirmed with once again a percentage of retransmitters that drastically decreases when the density increases, and such in a hyperbolic fashion. This is shown in Figure 4.

## 6 Conclusions

In this paper we have analysed and compared two recently proposed flooding algorithms (*i.e.* MPR flooding and gateway flooding), in view to improve the usual broadcast technique - like OSPF's - that has been in use for years on wired networks. The flooding algorithm is an essential part of most network protocols, and this usual mechanism is namely too brutal to work efficiently enough in an ad-hoc environment, where the bandwidth is limited and the interferences between users a big issue when a lot of retransmissions occur. Via mathematical analysis and simulations we have shown that MPR flooding presents a much better optimization than Gateway nodes flooding, and we have also pointed out why the latter is not as fully optimized as it may perhaps be.

## References

- [1] T. Clausen, P. Jacquet, A. Laouiti, P. Minet, P. Muhlethaler, A. Qayyum, L. Viennot, "Optimized Link State Routing Protocol," RFC 3626, <http://ietf.org/rfc/rfc3626.txt>, 2003.
- [2] S. Corson, J. Macker, "Mobile Ad hoc Networking (MANET): Routing Protocol Performance Issues and Evaluation Considerations," RFC 2501, <http://ietf.org/rfc/rfc2501.txt>, 1999.
- [3] F. Baker, M. Chandra, R. White, J. Macker, T. Henderson, E. Baccelli, "MANET OSPF Problem Statement," Internet-Draft: draft-baker-manet-ospf-problem-statement-00.txt, Oct. 2003.
- [4] Navod Nikaein, Houda Labiod, Christian Bonnet, "DDR - Distributed Dynamic Routing Algorithm for Mobile Ad hoc Networks," MobiHOC Proceedings, 2000 .
- [5] J. Moy, "OSPF version 2," RFC 2328, <http://ietf.org/rfc/rfc2328.txt>, 1998.
- [6] D. Oran, "OSI IS-IS Intra-domain Routing Protocol," RFC 1142, <http://ietf.org/rfc/rfc1142.txt>, 1990.
- [7] P. Flajolet, A. Odlyzko, "Singularity analysis of generating functions," SIAM J. of Discrete Math. 3, 1990.



---

Unité de recherche INRIA Rocquencourt  
Domaine de Voluceau - Rocquencourt - BP 105 - 78153 Le Chesnay Cedex (France)

Unité de recherche INRIA Futurs : Parc Club Orsay Université - ZAC des Vignes  
4, rue Jacques Monod - 91893 ORSAY Cedex (France)

Unité de recherche INRIA Lorraine : LORIA, Technopôle de Nancy-Brabois - Campus scientifique  
615, rue du Jardin Botanique - BP 101 - 54602 Villers-lès-Nancy Cedex (France)

Unité de recherche INRIA Rennes : IRISA, Campus universitaire de Beaulieu - 35042 Rennes Cedex (France)

Unité de recherche INRIA Rhône-Alpes : 655, avenue de l'Europe - 38334 Montbonnot Saint-Ismier (France)

Unité de recherche INRIA Sophia Antipolis : 2004, route des Lucioles - BP 93 - 06902 Sophia Antipolis Cedex (France)

---

Éditeur  
INRIA - Domaine de Voluceau - Rocquencourt, BP 105 - 78153 Le Chesnay Cedex (France)  
<http://www.inria.fr>  
ISSN 0249-6399