

Estimation of longitudinal and lateral vehicle velocities: an algebraic approach

Jorge Villagra, Brigitte D'Andréa-Novel, Michel Fliess, Hugues Mounier

► **To cite this version:**

Jorge Villagra, Brigitte D'Andréa-Novel, Michel Fliess, Hugues Mounier. Estimation of longitudinal and lateral vehicle velocities: an algebraic approach. 2008 American Control Conference, Jun 2008, Seattle, United States. 2008. <inria-00263844>

HAL Id: inria-00263844

<https://hal.inria.fr/inria-00263844>

Submitted on 13 Mar 2008

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Estimation of longitudinal and lateral vehicle velocities: an algebraic approach

Jorge VILLAGRA*, Brigitte d'ANDRÉA-NOVEL*, Michel FLIESS†, Hugues MOUNIER‡

*Centre de Robotique, École des Mines de Paris

60 boulevard Saint-Michel, 75272 Paris cedex 06, France

jvillagr@ing.uc3m.es & brigitte.dandrea-novel@ensmp.fr

†INRIA-ALIEN & LIX (CNRS, UMR 7161)

École polytechnique, 91128 Palaiseau, France

Michel.Fliess@polytechnique.edu

‡Institut d'Électronique Fondamentale (CNRS, UMR 8622)

Université Paris-Sud, 91405 Orsay, France

Hugues.Mounier@ief.u-psud.fr

Abstract— This paper presents a new approach for estimating vehicle velocities at its gravity center. The proposed strategy relies on recent algebraic techniques for numerical differentiation and diagnosis. We do not use any tire model in order to obtain an estimation, which is robust with respect to model uncertainties (friction, ...). All available measurements in a mass-production car are however exploited.

I. INTRODUCTION

A. Generalities

Active security systems like ESP, lane keeping, ABS or even Stop&Go strongly depend on tire/road interaction forces. A good knowledge of the vehicle velocities at the center of gravity is also very important. Hence several tire model¹ based estimation methods have been developed in recent years.

A single track model, linear or not according to the tire models, has been often employed (see [26] and the references therein). In [3] and [21], the authors propose different versions of the extended Kalman filter. A H_∞ filter is suggested in [16]; [15] proposes a neural network approach and [6] a recursive least squares method; [23] uses sliding modes techniques; [2] implements a high gain observer; [4], [5], [10], [11], [12], [13], [24], [25] exploit a Lyapunov function in order to synthesize asymptotic nonlinear observers of tire forces or vehicle velocities. Those approaches are only valid under very favorable conditions, such as small steering angles or slowly variable velocities. Thus, in many situations they are extremely sensitive to friction conditions. Some other authors (see, e.g., [18], [20]) have tried to incorporate some kind of cornering stiffness variability using relaxation models, where parameters are identified online. In all those methods, tire models are hard to exploit because their parameters are too numerous and/or not easily identifiable. We have therefore preferred to use simple dynamical models,

¹See, e.g., [13], [19] and the references therein for details on vehicle dynamics.

with a minimal number of parameters, and to exploit at best the information coming from vehicle's sensors.

The wheel rotation obviously satisfies

$$I_r \dot{\omega} = -rF_x + C \quad (1)$$

where I_r and r are, respectively, the inertia momentum and the wheel radius, ω is the wheel rotation speed, F_x is the longitudinal tire force at ground/tire contact point, and C is the motor/brake torque. Since ω can be measured, I_r and r values can be approximately known, and if we suppose that C can be somehow estimated, Eq. (1) provides a first estimation of F_x . Besides, a good estimation of F_z can be obtained (see, e.g., [22]), so that an acceptable friction estimator could be synthesized. However, such an estimator would not be very robust with respect to imprecisions on torque estimation and wheel radius value. Thus, improving the estimation requires a good knowledge of the vehicle longitudinal velocity. Therefore, obtaining velocities on the center of gravity is the first step towards reliable vehicle onboard control laws and diagnosis.

Besides, slip ratio knowledge requires a precise estimation of longitudinal velocity, which is obtained by expressing longitudinal acceleration with respect to a rotating frame:

$$\begin{cases} \gamma_x(t) = \dot{V}_x(t) - \dot{\psi}(t)V_y(t) \\ \gamma_y(t) = \dot{V}_y(t) + \dot{\psi}(t)V_x(t) \end{cases} \quad (2)$$

where V_y is the lateral velocity, $\dot{\psi}$ the yaw rate, γ_x the longitudinal acceleration and γ_y the lateral acceleration. Even if vertical, pitch and roll dynamics are neglected in this model, it remains very realistic in most situations. Furthermore, it is completely independent of the considered vehicle, and therefore on its parameters. No parameter is then required; only the three previous measurements (plus odometer informations) will be necessary. Let us note that, contrarily to most of the previous approaches, we will not use the steering angle input, usually accessible on the CAN bus.

B. Outline of the article

Section II presents the general approach in order to estimate longitudinal and lateral velocities. Some tools from diagnosis will be introduced and we shall explain how to tackle the unobservability problems associated to Eq. (2). In a real automotive context, low cost sensors are generally used, so that measurements are usually highly noise-corrupted. Filtering these signals is the object of Section III, where a summary on numerical differentiation is presented. Section IV is devoted to a precise explanation of the implemented estimation algorithms. Section V provides convincing numerical results of very realistic simulations. The conclusion in Section VI is sketching some future works.

II. DIAGNOSIS FOR VELOCITIES ESTIMATION

As previously mentioned, Eq. (2) and the available measurements of γ_x , γ_y and $\dot{\psi}$ on high-end cars will be used to precisely estimate V_x and V_y . The next proposition shows the mathematical impossibility of estimating simultaneously V_x and V_y from the previous three measurements².

Proposition 1: Longitudinal and lateral velocities (V_x , V_y) cannot be simultaneously estimated from equations:

$$\gamma_x(t) = \dot{V}_x(t) - \dot{\psi}(t)V_y(t) \quad (3)$$

$$\gamma_y(t) = \dot{V}_y(t) + \dot{\psi}(t)V_x(t) \quad (4)$$

except if values $V_{x_{t_0}}$ and $V_{y_{t_0}}$ at initial time t_0 are known.

Proof: Eq. (2) can be rewritten as a single equation in the complex domain if the linear combination (3)+ i (4), where $i = \sqrt{-1}$, is considered:

$$\dot{V}_x(t) + i\dot{V}_y(t) = \gamma_x(t) + i\gamma_y(t) + \dot{\psi}(-iV_x(t) + V_y(t))$$

which is equivalent to the complex differential equation

$$\dot{V} = -i\dot{\psi}(t)V(t) + \gamma(t), \quad V(t_0) = V_0 \quad (5)$$

where $V(t) = V_x(t) + iV_y(t)$ and $\gamma(t) = \gamma_x(t) + i\gamma_y(t)$. Eq. (5) has a unique solution if, and only if, the initial condition $V_0 = V_x(t_0) + iV_y(t_0)$ is known. ■

It hardly seems possible to have good estimators of longitudinal and lateral velocities using only Eq. (2). Indeed, a good estimation would require the precise knowledge of initial conditions at every sample (in order to avoid increasing offsets due to integration).

Our strategy allows to use at best Eq. (2) by means of diagnosis tools (see, e.g., [9] and the references therein). Let us consider the velocities (V_x, V_y) as the sum of an ideal term (R_x, R_y) and a "disturbing" one³ (G_x, G_y)

$$\begin{cases} V_x(t) = R_x(t) + G_x(t) \\ V_y(t) = R_y(t) + G_y(t) \end{cases} \quad (6)$$

where

- $R_x = r\omega_t$,

²This property may be related to a lack of observability (see [9] and the references therein).

³Those disturbing terms are nothing else than "poorly known" effects. See [8] for the control of poorly known systems.

- r is the static wheel radius,
- $\omega_t = \frac{1}{4} \sum_{i=1}^4 \omega_i$ is the mean rotation speed of the four wheels,
- $R_y = -L_1 \dot{\psi}$,
- L_1 is the vehicle front wheelbase.

Remark 1: The difference between faultless and faulty behavior appears in a quite natural way in longitudinal dynamics. Concerning lateral dynamics, sideslip angle expression on the front axle's center β_1 can be used to obtain an equation similar to Eq. (6):

$$\beta_1 = \arctan\left(\frac{V_y + L_1 \dot{\psi}}{V_x}\right) \Rightarrow V_y = -L_1 \dot{\psi} + V_x \tan(\beta_1).$$

Differentiating both sides of Eq. (6) and replacing \dot{V}_x and \dot{V}_y by their corresponding expressions in Eq. (2) yields:

$$\begin{aligned} \dot{R}_x &= \dot{\psi}R_y - \dot{G}_x + \dot{\psi}G_y + \gamma_x \\ \dot{R}_y &= -\dot{\psi}R_x - \dot{G}_y - \dot{\psi}G_x + \gamma_y \end{aligned}$$

It yields for G_x and G_y :

$$\begin{aligned} \dot{G}_x(t) &= \dot{\psi}(t)G_y(t) - L_1 \dot{\psi}^2(t) - r\dot{\omega}_t(t) + \gamma_x(t) \\ \dot{G}_y(t) &= -\dot{\psi}(t)G_x(t) - \dot{\psi}(t)r\omega_t(t) + L_1 \dot{\psi}(t) + \gamma_y(t) \end{aligned} \quad (7)$$

and if we consider initial conditions

$$G_x(t_0) = 0, \quad G_y(t_0) = 0$$

then the integration of this system provides the necessary information about the instants where the assumption $V_x = r\omega_t$ is no more valid. If values coming from this numerical integration were precise, they could be sufficient to get a good estimation of longitudinal velocity (details will be presented in Section IV). However, highly corrupted signals provided by the vehicle sensors (especially accelerometers, see Fig. 1) and fixed integration step determined by signals sampling rate impose a signal pre-treatment. In addition, robust and real-time efficient numerical differentiators are also needed to render this approach feasible. It will be implemented on one hand to filter γ_x , γ_y , $\dot{\psi}$, and on the other hand to estimate the derivatives $\dot{\omega}$ and $\dot{\psi}$.

III. ALGEBRAIC NUMERICAL DIFFERENTIATION⁴

Replace the convergent Taylor expansion $x(t) = \sum_{n \geq 0} a_n \frac{t^n}{n!}$, $a_n \in \mathbb{C}$, by its truncated Taylor expansion $x_N(t) = \sum_{n=0}^N a_n \frac{t^n}{n!}$. It reads in the operational domain as (see, e.g., [27]):

$$s^{N+1}x_N - s^N x_N(0) - s^{N-1} \dot{x}_N(0) \dots - x_N^{(N)}(0) = 0$$

The derivatives at the origin $t = 0$ are directly obtained from the linear system of equations

$$s^{-v} \frac{d^m}{ds^m} \left\{ x_N^{(N)}(0) + x_N^{(N-1)}(0)s + \dots + x_N(0)s^N \right\} = s^{-v} \frac{d^m}{ds^m} \left\{ s^{N+1}x_N \right\} \quad (8)$$

⁴See [9] for more details and various application to nonlinear systems, such as state and parameter estimation, diagnosis, and perturbation attenuation. Let us add moreover that the engineering literature on numerical differentiation is a huge one; see, e.g., the references in [9].

$m = 0, \dots, N$, $v \geq N + 1$. This system is a triangular one with non-zero diagonal elements: it implies that the parameters $x_N^{(i)}(0)$, and therefore the coefficients a_0, \dots, a_N are *linearly identifiable*. Replace x_N by x in Eq. (8) to obtain the *operational estimator* $[x^{(i)}(0)]_{e_N}$ of $x^{(i)}(0)$.

Write the numerical estimates by expressing Eq. (8) back in the time domain, using the classical rules of operational calculus [27]:

- $\frac{c}{s^\alpha}$, $\alpha \geq 1$, $c \in \mathbb{C}$, by $c \frac{t^{\alpha-1}}{(\alpha-1)!}$, $t \geq 0$;
- $\frac{1}{s^\alpha} \frac{d^n x}{ds^n}$ by the iterated integral of order α

$$\int_0^t \int_0^{t_1} \dots \int_0^{t_{\alpha-1}} (-1)^n \tau^n x(\tau) dt_{\alpha-1} \dots dt_1 d\tau = \frac{(-1)^n}{(\alpha-1)!} \int_0^t (t-\tau)^{\alpha-1} \tau^n x(\tau) d\tau \quad (9)$$

Remark 2: Iterated integrals have an averaging effect, and therefore act as low-pass filters, which attenuate noises, when viewed as highly fluctuating phenomena⁵.

Remark 3: A feasible real-time implementation is achieved thanks to a short time window.

A general expression of the n^{th} -derivative estimators can be written, in a window of size T , as follows [14]:

$$\mathcal{P}_v(T) \begin{bmatrix} x_N(0) \\ \dot{x}_N(0) \\ \vdots \\ x_N^{(N)} \end{bmatrix} = \int_0^T \mathcal{Q}_v(\tau) y(\tau) d\tau \quad (10)$$

where the elements of the triangular matrix $\mathcal{P}_v(T)$ are, for $i = 0, \dots, N$, $j = 0, \dots, N - i$:

$$\{\mathcal{P}_v(T)\}_{ij} = \frac{(N-j)!}{(N-1-j)!} \frac{T^{v-N+i+j-1}}{(v-N+i+j-1)}$$

The elements of the integral term are

$$\{\mathcal{Q}_v(\tau)\}_i = \sum_{l=0}^i q_{i,l} (T-\tau)^{v-N-1-l} \tau^{i-l}$$

with

$$q_{i,l} = \binom{i}{l} \frac{(N+1)!}{(N+1-l)!} \frac{(-1)^{i-l}}{(v-N-1-l)!}$$

Let us show as an example the particular expression of Eq. (10) for filtering the longitudinal acceleration and differentiating the yaw rate.

In both cases, the signal can be locally approximated by polynomials of degree 1, i.e., $N = 1$. Thus, $\gamma_y(t) = a_0 + a_1 t$, $t \geq 0$, $a_0, a_1 \in \mathbb{R}$, and $\dot{\psi}(t) = b_0 + b_1 t$, $t \geq 0$, $b_0, b_1 \in \mathbb{R}$. It yields, if we take for instance $v = 2$, the following estimators:

$$\hat{\gamma}_y = \hat{a}_0 = \frac{2}{T^2} \int_0^T (2T - 3\tau) \gamma_y(\tau) d\tau$$

$$\hat{\dot{\psi}} = \hat{b}_1 = \frac{-3!}{T^3} \int_0^T (T - 2\tau) \dot{\psi}(\tau) d\tau$$

Observe in Fig. 1 that the noise attenuation is obviously related to the size of the estimation window.

⁵See [7] for details.

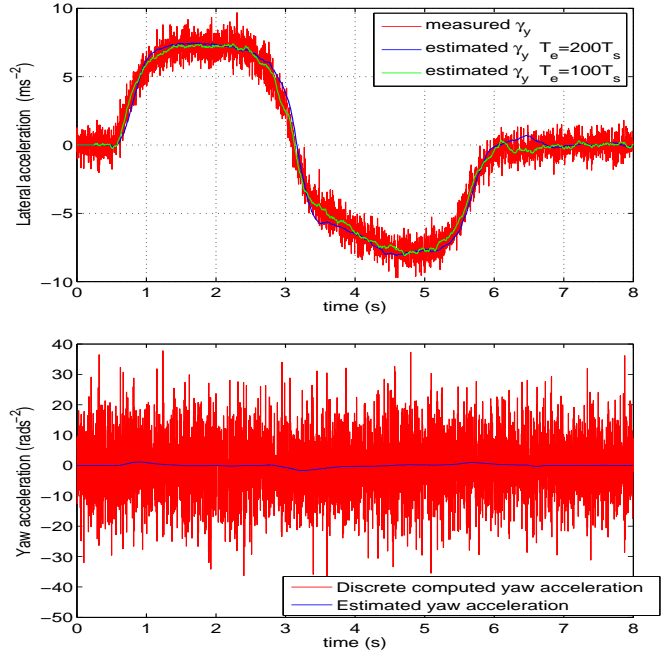


Fig. 1. Lateral acceleration filtering with 2 different window sizes (top). Comparison between a standard numerical differentiation of $\dot{\psi}$ and the one obtained with the algebraic methods (bottom)

IV. ESTIMATION ALGORITHMS

From Eq. (2) and (7) the estimates of V_x and V_y can be obtained via the algorithms 1 and 2.

Algorithm 1 Estimation of V_x

Require: Yaw rate $\dot{\psi}(t)$, longitudinal and lateral acceleration ($\gamma_x(t)$ and $\gamma_y(t)$), 4 wheel's rotation speed $\omega_i(t)$, lateral velocity estimator $\hat{V}_y(t)$

Ensure: Longitudinal velocity estimator $\hat{V}_x(t_i)$, $\forall t_i \in [0, T]$

- 1: Use algebraic methods described in Section III to obtain $\hat{\psi}$, $\hat{\dot{\psi}}$, $\hat{\gamma}_x$, $\hat{\gamma}_y$, $\hat{\omega}_t$ and $\hat{\dot{\omega}}_t$
 - 2: Integrate numerically system (7) with previous estimated signals
 - 3: **if** $|\hat{G}_x(t)| < \varepsilon_1$, $\forall t \in [t_i - \alpha T_s, t_i]$ **then**
 - 4: $\hat{V}_x(t_i) = r\omega_t(t_i)$
 - 5: **else**
 - 6: $\hat{V}_x(t_i) = \hat{V}_x(t_{i-1}) + \left(\int_{t_i}^t \gamma_x + \dot{\psi} \hat{V}_y \right) dt$
 - 7: **end if**
-

We see at the bottom of Fig. 2 that the obtained estimation is excellent and differs significantly from the crude estimate $r\omega_t$. Indeed, when slipping becomes significant, the algorithm does not rely on wheel speed (line 4 of algorithm 1), but also on accelerometer's measure (line 6 of algorithm 1). The switch between these two modes, bearing some resemblance with diagnosis techniques, relies on the significance of some residual related terms.

Note that these switching conditions (line 3 in algorithms 1 & 2) between integration modes are not solely obtained

Algorithm 2 Estimation of V_y

Require: Yaw rate $\dot{\psi}(t)$, longitudinal and lateral acceleration ($\gamma_x(t)$ and $\gamma_y(t)$), 4 wheel's rotation speed $\omega_i(t)$, longitudinal velocity estimator $\hat{V}_y(t)$, initial lateral velocity $\hat{V}_y(t_0) = V_{y0}$

Ensure: Lateral velocity estimator $\hat{V}_y(t_i)$, $\forall t_i \in [0, T]$

- 1: Use algebraic methods described in Section III to obtain $\hat{\psi}$, $\hat{\dot{\psi}}$, $\hat{\gamma}_x$, $\hat{\gamma}_y$, $\hat{\omega}_i$ and $\hat{\omega}_t$
 - 2: Integrate numerically system (7) with previous estimated signals
 - 3: **if** $|\hat{\dot{\psi}}(t)| < \varepsilon_2$, $\forall t \in [t_i - \beta T_s, t_i]$ **then**
 - 4: $\hat{V}_y(t_i) = 0$
 - 5: **else**
 - 6: $\hat{V}_y(t_i) = \hat{V}_y(t_{i-1}) + \int_{t_i}^t (\gamma_y - \dot{\psi} \hat{V}_x) dt$
 - 7: **end if**
-

from G_x and G_y values. Hence, remark in Fig. 2 that, even if the evolution of G_x is naturally linked to the validity of equation $V_x = r\omega_t$, G_x does not stabilize around the origin for time instants $t \geq 7s$. This phenomenon can be explained by two facts: measurements are highly corrupted by noise and integration step is fixed and constrained by the sampling rate.

G_x has been chosen as the switching variable in line 3 of algorithm 1 because, even if it is slightly noisy, it remains close to zero when $V_x = r\omega_t$. Note that the threshold condition established in algorithms 1 and 2 must be fulfilled all over a window of a user-predefined size αT_s . The aim of this kind of constraint is to avoid sudden changes in estimation modes (line 4, resp. 5, in the algorithms 1 & 2) each time the noisy \dot{G}_x passes through zero. However, we see in Fig. 2 (middle graph, final zone) that the response time to stabilization around $\dot{G}_x = 0$ is quite significant⁶.

The previous analysis concerning the switching variable for longitudinal dynamics is not valid anymore for lateral dynamics. Note in Fig. 3 that \dot{G}_y is much more noisy than \dot{G}_x . This fact is probably due to remanent noise on yaw rate derivative estimation. Therefore, it seems much more convenient to use a noiseless estimate of the yaw rate to decide whether the lateral velocity is zero or if it is given by Eq. (4).

Remark 4: If the working horizon is quite long, it is preferable to reset Eq. (7) when the derivatives of the residuals R_x and R_y get close to zero.

V. NUMERICAL EXPERIMENTS

Our scenario (see steering angle and motor/brake torque in Fig. 4) leads to maximal longitudinal and lateral accelerations γ_x and γ_y which are approximately equal to $0.8g$ (see the last graph in Fig. 4).

Our numerical experiments are very realistic. We are employing a simulator of a vehicle with 14 degrees of freedom, and with complete drive-train and tire models (see [17]). The white Gaussian noises, which have been added

⁶A good trade-off between noisy or reactive estimation will be the engineers task.

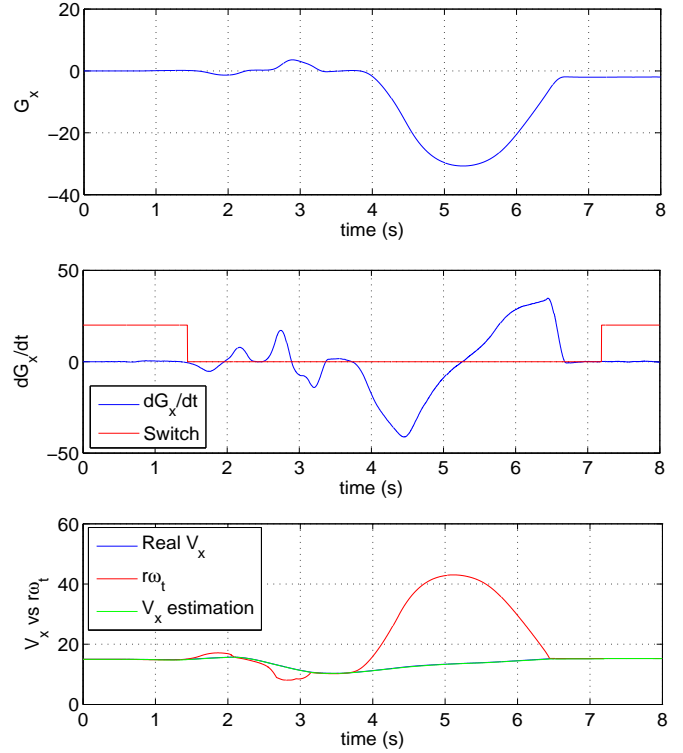


Fig. 2. $G_x(t)$ (top); $\dot{G}_x(t)$ and switching variable on longitudinal velocity estimation (middle); real and estimated longitudinal velocities and $r\omega_t$ (bottom)

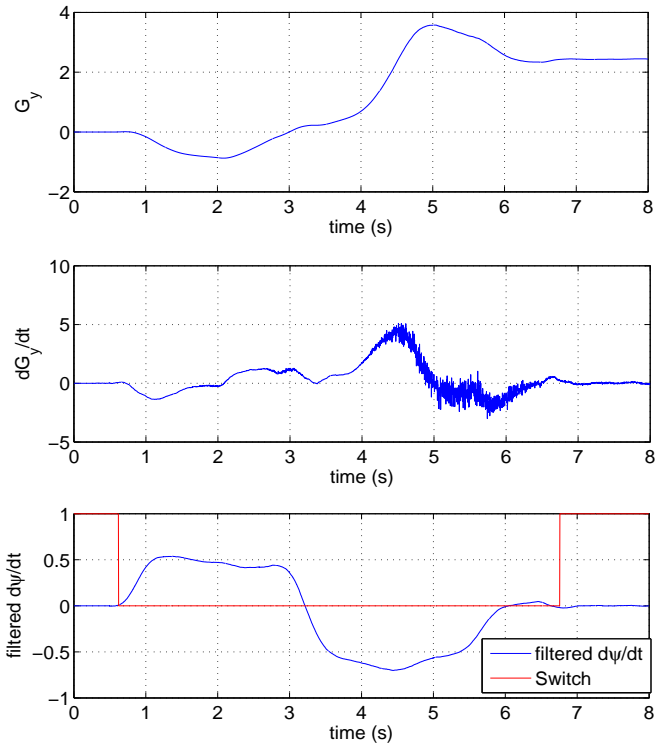


Fig. 3. $G_y(t)$ (top), $\dot{G}_y(t)$ (middle), and filtered $\dot{\psi}$ and switching variable on lateral velocity estimation (bottom)

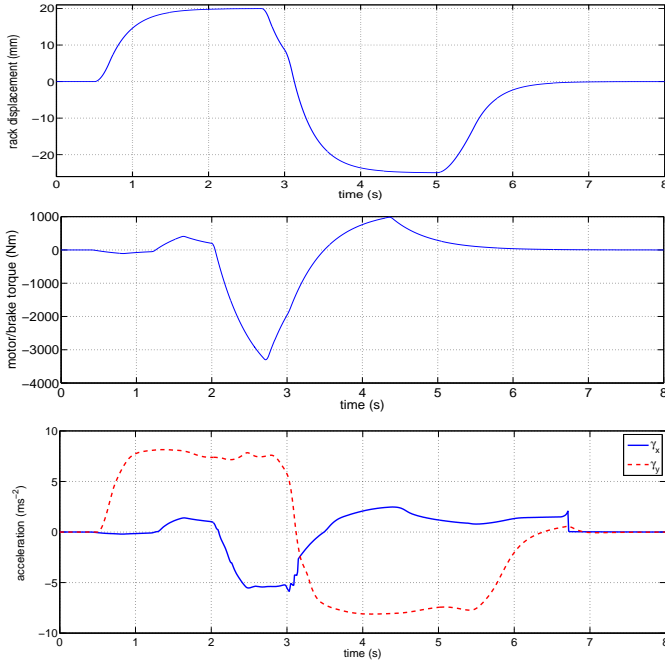


Fig. 4. Steering angle (rack displacement), motor/brake torque, and longitudinal/lateral accelerations of the vehicle.

to every measured signal, are stronger than those corrupting real onboard sensors. All necessary parameters to implement the previous algorithms are detailed in table I.

Parameter	Value
T_s	0.0025 s
ε_1	0.01
ε_2	0.01
α	200
β	100
T_e	200

TABLE I
PARAMETER VALUES

Fig. 5 shows the simulation results on a quite normal road, where the friction coefficient is $\mu = 0.7$. The estimators perform pretty well. Fig. 6 and 7 show their behaviors when the driver actions are identical, but the friction coefficient is, respectively, higher ($\mu = 0.9$) and lower ($\mu = 0.5$).

Remark that the global behavior is very similar to the previous case. Thus, longitudinal velocity is rather well estimated and lateral velocity respects the trends previously shown. Nevertheless, note that estimation errors on V_x have a larger influence on V_y estimation than conversely.

VI. CONCLUSION

A new estimation approach for vehicle velocities at its center of gravity is proposed. It is based on algebraic estimation techniques and diagnosis tools. A new strategy is presented, where only acceleration equations with respect to a rotating frame is used. Since this system of equations does

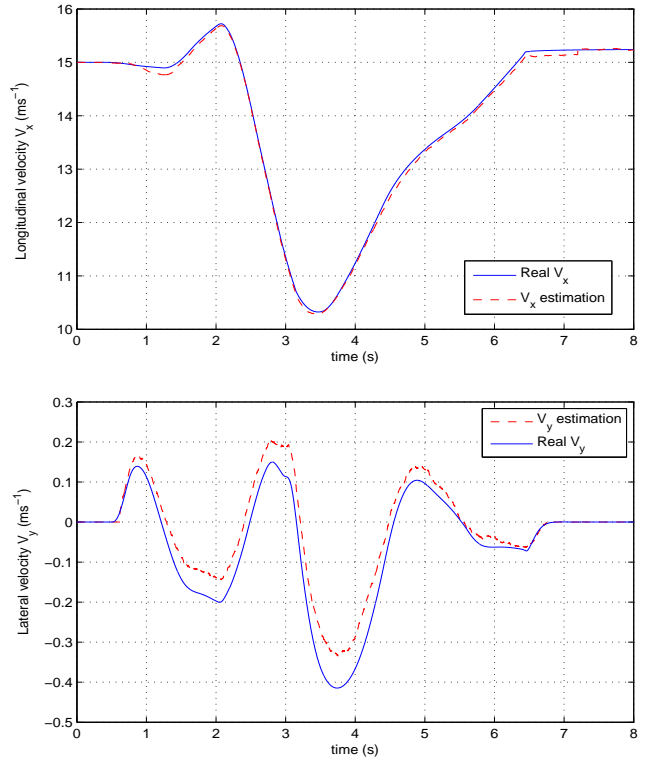


Fig. 5. Real and estimated longitudinal (top) and lateral (bottom) velocities with a friction coefficient $\mu = 0.7$

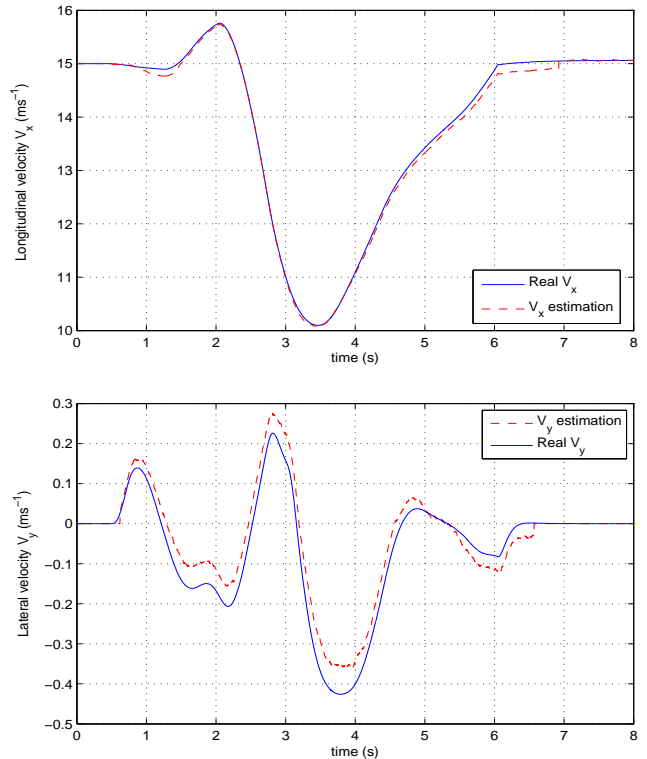


Fig. 6. Real and estimated longitudinal (top) and lateral (bottom) velocities with a friction coefficient $\mu = 0.9$

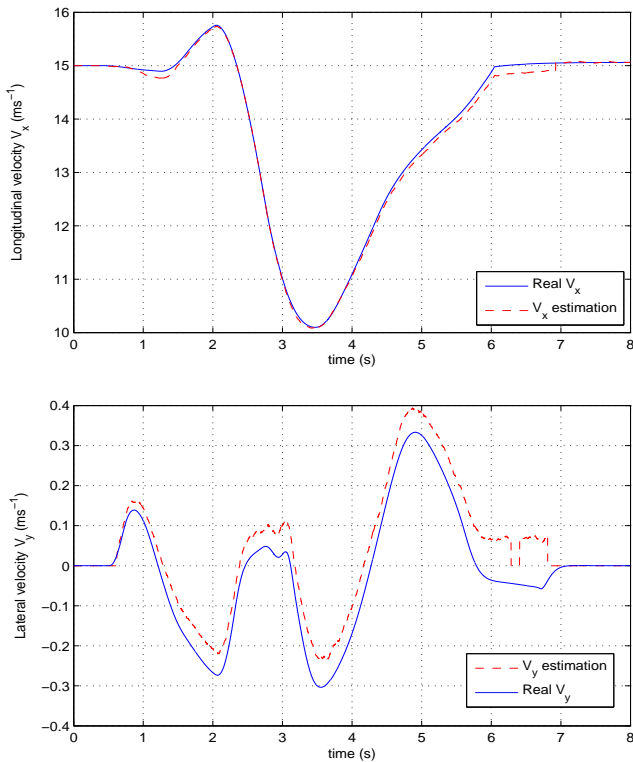


Fig. 7. Real and estimated longitudinal (top) and lateral (bottom) velocities with a friction coefficient $\mu = 0.5$

not contain any vehicle parameter, the obtained estimators are remarkably robust.

Our first results not only exhibit excellent tracking quality, but also demonstrate good robustness with respect to noisy measurements and to road friction coefficient variations. Even if our simulations are accurately reproducing realistic situations, an experimental validation on a large range of scenarios (including banked roads) is necessary, and is under development on a prototype vehicle. Besides, similar techniques will be tested on tire forces and friction coefficient estimation.

See [1] for a preliminary application of our algebraic estimation techniques to traffic control.

Acknowledgments: This work was partially supported by the project *Méthodes algébriques pour l'estimation temps réel : le cas des coefficients d'adhérence des efforts pneumatiques* of the French GdR MACS (CNRS). The authors want also to express their gratitude to C. Join (INRIA-ALIEN & CRAN, CNRS – Nancy-Université) and M. Mboup (INRIA-ALIEN & Université René-Descartes (Paris V)) for helping them to implement the numerical differentiators.

REFERENCES

[1] H. Abouaïssa, M. Fliess, C. Join, "Fast parametric estimation for macroscopic traffic flow model", *Proc. 17th IFAC World Congress*, Seoul, 2008 (online <http://hal.inria.fr/inria-00259032/en/>).

[2] B. d'Andréa-Novet, H. Chou, J.-M. Coron, M. Ellouze, E. Fenaux, M. Pengov, F. Zarka, "An optimal control methodology for braking in corner with stability", *Europ. Control Conf.*, Porto, 2001.

[3] G. Baffet, A. Charara, J. Stéphant, "Sideslip angle, lateral tire force and road friction estimation in simulations and experiments", *Proc. IEEE Internat. Conf. Control Appl.*, Munich, pp. 903-908, 2006.

[4] M. Börner, R. Isermann, "Adaptive one-track model for critical lateral driving situations", *Proc. Internat. Symp. Advanced Vehicle Control*, Hiroshima, 2002.

[5] H. Cherouat, M. Braci, S. Diop, "Vehicle velocity, side slip angles and yaw rate estimation", *Proc. IEEE Internat. Symp. Industrial Electronics*, Dubrovnik, pp. 349-354, 2005.

[6] W. Deng, H. Zhang, "RLS-Based online estimation on vehicle linear sideslip", *Proc. Amer. Control Conf.*, Minneapolis, 2006.

[7] M. Fliess, "Analyse non standard du bruit", *C.R Acad. Sc. Paris, ser. I*, vol. 342, pp. 797-802, 2006.

[8] M. Fliess, C. Join, "Commande sans modèle et commande à modèle restreint", *e-STA*, vol. 5, 2008 (soon online <http://hal.inria.fr/>).

[9] M. Fliess, C. Join, H. Sira-Ramírez, "Non-linear estimation is easy", *Int. J. Modelling Identification Control*, vol. 3, 2008 (online <http://hal.inria.fr/inria-00158855/en/>).

[10] Y. Fukada, "Slip-Angle Estimation for Vehicle Stability Control", *Vehicle System Dynamics*, vol. 32, p. 375-388, 1999.

[11] A. Hac, M.D. Simpson, "Estimation of vehicle side slip angle and yaw rate", *Proc. SAE World Congress*, Detroit, 2000.

[12] H.F. Grip, L. Imstrand, T.A. Johansen, T. I. Fossen, J. C. Kalkkuhl, A. Suissa, "Nonlinear vehicle side-slip estimation with friction adaptation", *Automatica*, vol. 44, pp. 611-622, 2008.

[13] U. Kiencke, L. Nielsen, *Automotive Control Systems for Engine, Driveline and Vehicle*, Springer, 2005.

[14] M. Mboup, C. Join, M. Fliess, "A revised look at numerical differentiation with an application to nonlinear feedback control", *Proc. 15th Medit. Conf. Control Automat.*, Athens, 2007 (online <http://hal.inria.fr/inria-00142588/en/>).

[15] J. Matusko, I. Petrovic, N. Peric, "Neural Network based tire/road friction force estimation", *Engineering Applic. Artif. Intelligence*, vol. 21, 2008.

[16] R.T. O'Brien Jr, K. Kiriakidis, "A comparison of H_∞ with Kalman Filtering in vehicle state and parameter identification", *Proc. Amer. Control Conf.*, Minneapolis, 2006.

[17] H. Pacejka, E. Baker, "The magic formula tyre mode 1", *1st Internat. Coll. Tyre Models Vehicle System Analysis*, pp. 1-18, 1991.

[18] A. Rahbi, N.K. M'Sirdi, N. Zbiri, Y. Delanne, "Vehicle-road interaction modelling for estimation of contact forces", *Vehicle System Dynamics*, vol. 43, pp. 403-411, 2005.

[19] R. Rajamani, *Vehicle Dynamics And Control*, Springer, 2005.

[20] L. Ray, "Nonlinear tire force estimation and road friction identification: simulation and experiments", *Automatica*, vol. 33, pp. 1819-1833, 1997.

[21] B. Samadi, R. Kazemi K. Y. Nikraves, M. Kabganian, "Real-Time estimation of vehicle state and tire-road friction forces", *American Control Conf.*, Arlington, pp. 3318-3323, 2001.

[22] T. Shim, D. Margolis, "Model-Based Road Friction Estimation", *Vehicle System Dynamics*, Vol. 41, pp. 249-276, 2004.

[23] J. Stéphant, A. Charara, D. Meizel, "Evaluation of sliding mode observer for vehicle sideslip angle", *Proc. 16th IFAC World Congress*, Prague, 2005.

[24] A.Y. Ungoren, H. Peng, H.E. Tseng "A study on lateral speed estimation methods", *Int. J. Vehicle Autonomous Systems*, Vol. 2, 2004.

[25] A. von Vietinghoff, M. Hiemer, U. Kiencke, "Nonlinear observer design for lateral vehicle dynamics", *Proc. 16th IFAC World Congress*, Prague, 2005.

[26] J. Villagra, *Conception optimisée de lois de commande et de paramètres pour les organes de liaison au sol*, Thèse, École des Mines de Paris, 2006.

[27] K. Yosida, *Operational Calculus: A Theory of Hyperfunctions*, Springer, 1984 (translated from the Japanese).