

A global method for coupling transport with chemistry in heterogeneous porous media

Amir Laila, Michel Kern

► **To cite this version:**

Amir Laila, Michel Kern. A global method for coupling transport with chemistry in heterogeneous porous media. Computational Geosciences, Springer Verlag, 2010, 14 (3), pp.465-481. <<http://www.springerlink.com/content/933p55085742m203/?p=9daa7a95481344afbc491cb216fa1d3e&pi=14>> <10.1007/s10596-009-9162-x>. <inria-00442243>

HAL Id: inria-00442243

<https://hal.inria.fr/inria-00442243>

Submitted on 18 Dec 2009

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A global method for coupling transport with chemistry in heterogeneous porous media

Laila AMIR · Michel KERN

Received: date / Accepted: date

Abstract Modeling reactive transport in porous media, using a local chemical equilibrium assumption, leads to a system of advection-diffusion PDE's coupled with algebraic equations. When solving this coupled system, the algebraic equations have to be solved at each grid point for each chemical species and at each time step. This leads to a coupled non-linear system. In this paper a global solution approach that enables to keep the software codes for transport and chemistry distinct is proposed. The method applies the Newton-Krylov framework to the formulation for reactive transport used in operator splitting. The method is formulated in terms of total mobile and total fixed concentrations and uses the chemical solver as a black box, as it only requires that one be able to solve chemical equilibrium problems (and compute derivatives), without having to know the solution method. An additional advantage of the Newton-Krylov method is that the Jacobian is only needed as an operator in a Jacobian matrix times vector product. The proposed method is tested on the MoMaS reactive transport benchmark.

Keywords Geochemistry · transport in porous media · Newton-Krylov methods · advection–diffusion–reaction equations

Mathematics Subject Classification (2000) 76V05 · 65M99

1 Introduction

The simulation of multi-species reacting systems in porous media is of importance in several different fields: for computing the near field in nuclear waste simulations, in the treatment of bio-remediation, in CO₂ sequestration simulations and in the evaluation of underground water quality.

This work deals with numerical methods for solving coupled transport and chemistry problems. The transport of solutes in porous media is described by partial differential equations of advection–diffusion type, whereas multi-species chemistry involves the solution of ordinary differential equations (if the reactions are kinetic) or nonlinear algebraic equations (if local equilibrium is assumed). After discretization, one is led to a system of nonlinear equations, coupled the unknowns for all chemical species at all grid points.

Laila AMIR · Michel KERN
INRIA-Rocquencourt, B.P. 105, F-78153 Le Chesnay Cedex, France.
E-mail: Michel.kern@inria.fr

Laila AMIR
ITASCA Consultants, S.A, 64, Chemin des Mouilles 69134 - Ecully, France,
E-mail: Laila.Amir@inria.fr

After the influential paper by Yeh and Tripathi [47], operator splitting methods, where transport and chemistry are solved for separately at each time step (possibly iterating to convergence), became the methods of choice. Some representative papers where operator splitting methods are used are [39], [38], [4], [21], [29], [41]. Operator splitting methods are easy to implement, and the splitting errors can be controlled by carefully restricting the time step. On the other hand, the time-step restriction can become their main drawback, as it can be difficult to get the fixed point iteration to converge for more difficult problems.

More recently, global methods have become popular, due to the increase in computing power now available. In this approach, the full non-linear system is solved in one step, usually by some form of Newton’s method. Most papers use the Direct Substitution Approach (see [17], [14]), where one *substitutes* the chemical equations in the transport equations. On the other hand, the problem can also be put in the form of a Differential Algebraic Equations (DAE), enabling the use of powerful software (see [11]). Finally, the chemical equations can be eliminated locally, and a system involving transport equations, with a source term coming from the reactions has to be solved. This approach is taken in [25, 26], where additionally a reduction method leads to a smaller system. Most of the papers quoted above employ a Newton method for solving the nonlinear system at each time step, with the difficulty that the Jacobian matrix has to be computed, stored and factored. This can become problematic for large problems, and Hammond et al. [17] have used the Jacobian-Free Newton–Krylov method, where the Newton correction is solved for by an iterative method. The Jacobian is only needed through the computation of a directional derivative. The method keeps the fast convergence of Newton’s method, while only requiring Jacobian matrix–vector products, and these can be approximated by finite differences.

The method presented in this paper is a global method where the chemical equations are eliminated locally, leading to a nonlinear system where the transport and chemistry subsystems remain separated. Thus the residual can be evaluated by calling separately written transport and chemistry modules. The system is then solved by a Newton-Krylov method, and it will be shown how the Jacobian matrix–vector product can also be computed by the same module. Thus the main contribution of this paper is to show that a global method can be implemented while still keeping transport and chemistry modules separated. This property will be referred to as using “black–box solvers”. As the chemical equilibrium equations are not substituted in the transport equations, the transport and chemistry parts of the nonlinear residual are easily identified, and can each be computed by calling on standard solution modules.

An outline of the paper is as follows. In section 2 the chosen model is explained, and the methods used for solving the (non-reactive) transport part, and the chemical equilibrium system are detailed. Section 2.3 shows how we obtain the coupled model. Couple formulations and coupling algorithms are the subject of section 3, beginning with a review of existing methods, while our approach is presented in section 3.2. Numerical results, in particular experience with the MoMaS benchmark, are shown in section 4.

2 Reactive transport equations

In this work, the transport of several reacting species in a single phase flow through a porous medium is considered. The species can react both between themselves and with the porous matrix. In this section the numerical methods used to solve the individual subsystems of the coupled problem will be described.

2.1 Transport model

The transport of a single species through a porous medium (a domain $\Omega \subset \mathbf{R}^d$, with $d = 1, 2$ or 3), with porosity ϕ , in a known Darcy field u , subject to dispersion and molecular diffusion, follows the linear advection–dispersion equation

$$\phi \frac{\partial c}{\partial t} + L(c) = q, \quad \text{in } \Omega \quad (1)$$

where

$$L(c) = \nabla \cdot (uc) - \nabla \cdot (D\nabla c),$$

is the transport operator, and q is a source term. The diffusion–dispersion tensor D is given by

$$D = d_e I + |u| (\alpha_L E(u) + \alpha_t (I - E(u))), \quad E_{ij}(u) = \frac{u_i u_j}{|u|^2},$$

where d_e is the molecular diffusion coefficient, and α_L (resp. α_t) is the longitudinal (resp. transverse) dispersivity coefficient.

In this work, we restrict to a one dimensional problem, so that the transport equation over a bounded interval $\Omega =]0, L[$ can be written as

$$\phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x} \left(-D \frac{\partial c}{\partial x} + uc \right) = q, \quad 0 < x < L, \quad 0 < t < T, \quad (2)$$

where the porosity ϕ and the diffusion–dispersion coefficient D can both depend on space. Because the flow is assumed compressible, the velocity u is taken to be a constant.

The initial condition is $c(x, 0) = c_0(x)$ and, in view of the applications, the boundary conditions are a Dirichlet condition (given concentration) $c(0, t) = c_d(t)$ at the left boundary ($x = 0$) and zero diffusive flux $\frac{\partial c}{\partial x} = 0$ at the right boundary ($x = L$). More general boundary conditions could easily be accommodated.

2.1.1 Discretization in space

We treat the space and time discretization separately, as we will use different time discretizations for the different parts of the transport operator.

For space discretization a cell-centered finite volume scheme will be used, see for instance [13]. The interval $[0, L]$ is divided into N_g intervals $[x_{i-\frac{1}{2}}, x_{i+\frac{1}{2}}]$ of length h_i , where $x_{\frac{1}{2}} = 0, x_{N_g+\frac{1}{2}} = L$. For $i = 1, \dots, N_g$, denote by x_i the center and $x_{i+1/2}$ the right end of element i . Finally, denote by $c_i, i = 1, \dots, N_g$ the approximate solution in cell i .

Equation (2) is written in the form

$$\phi \frac{\partial c}{\partial t} + \frac{\partial \varphi}{\partial x} = q, \quad (3)$$

where the flux $\varphi(x, t) = -D \frac{\partial c}{\partial x} + uc$ has been split as the sum of a diffusive flux $\varphi_d = -D \frac{\partial c}{\partial x}$ and an advective flux $\varphi_a = uc$.

Equation (3) is integrated over a cell $]x_{i-1/2}, x_{i+1/2}[$ giving

$$\phi_i h_i \frac{dc_i}{dt} + \varphi_{d,i+\frac{1}{2}} + \varphi_{a,i+\frac{1}{2}} - \varphi_{d,i-\frac{1}{2}} - \varphi_{a,i-\frac{1}{2}} = h_i q_i, \quad i = 2, \dots, N_g. \quad (4)$$

The flux approximations required to close the system are provided by finite differences. The diffusive flux needs a value for the diffusion coefficient, which is taken as the harmonic average (as done in mixed finite element methods):

$$\varphi_{d,i+\frac{1}{2}} = -D_{i+\frac{1}{2}} \left(\frac{c_{i+1} - c_i}{h_{i+\frac{1}{2}}} \right) \quad (5)$$

with

$$D_{i+\frac{1}{2}} = \frac{2D_i D_{i+1}}{D_i + D_{i+1}}, \quad D_{\frac{1}{2}} = D_1, \quad D_{N_g+\frac{1}{2}} = D_{N_g} \quad \text{and} \quad h_{i+\frac{1}{2}} = \frac{h_i + h_{i+1}}{2}$$

For the advective flux, an upwind approximation is used, so that (assuming $u > 0$), $\varphi_{a,i+\frac{1}{2}} = uc_i$

These approximations are corrected to take into account the boundary conditions, both at $x = 0$ and at $x = L$. The semi-discrete system can be summarized by the finite dimensional system

$$M \frac{dc}{dt} + Lc = q + g, \quad (6)$$

where $c \in \mathbf{R}^{N_g}$ now represents the vector of cell concentrations, $L \in \mathbf{R}^{N_g, N_g}$ is the matrix form of the transport operator, $M \in \mathbf{R}^{N_g, N_g}$ is a mass matrix accounting for variable porosity and mesh size, $q \in \mathbf{R}^{N_g}$ is a give source term and $g \in \mathbf{R}^{N_g}$ represents the effects of the boundary conditions.

2.1.2 Time discretization

Let denote by Δt the time step (taken constant for simplicity) used to discretize the time interval $[0, T]$ and denote by c_i^n the (approximate) value of $c_i(n\Delta t)$. The first and most straightforward alternative is to discretize equation (6) by the backward Euler method, see for instance [3]. This is the method that is used in section 3 to keep the description simple, but is not the recommended method, as it leads to an overly diffusive scheme.

Better alternatives are obtained by exploiting the structure of the transport operator, and by using different time discretizations for the advective and for the diffusive parts. Specifically, the diffusive terms should be treated implicitly, and the advective terms are better handled explicitly.

If this idea is applied directly to equation (6), the resulting fully discrete scheme is only stable under a CFL (Courant–Friedrichs–Lewy) condition $u\Delta t \leq \max_i h_i$. As this may be too severe a restriction (some of our applications require integration over a very large time interval), an alternative is to use an operator splitting scheme, as proposed by Siegel et al. [43] (see also [20, 31]). In this work, splitting is used only within the (linear) transport step, but recent papers by Kačur et al. [16, 22] apply splitting directly to a transport with sorption model by solving (analytically) a nonlinear advection step, followed by a nonlinear diffusion step. This is different from operator splitting as used in geochemical models, as the chemistry terms are solved for together with the transport terms.

The splitting scheme works by taking several small time steps of advection, controlled by a CFL condition, within a large time step of diffusion. The scheme has been shown to be unconditionally stable, and has a good behavior in advection dominated situations.

More precisely, the time step Δt will be used as the diffusion time step, it is divided into M time steps of advection Δt_c such that $\Delta t = M\Delta t_c$ where $M \geq 1$, the advection time step will be controlled by CFL condition. Equation (3) will be solved over the time step $[t^n, t^{n+1}]$ by first solving the advection equation $\phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x}(uc) = 0$ over M steps of size Δt_c each, and then solving the diffusion equation $\phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x}(-D \frac{\partial c}{\partial x}) = q$ starting from the value at the end of the advection step.

Advection step The interval $[t^n, t^{n+1}]$ is divided into M intervals $[t^{n,m}, t^{n,m+1}]$, $m = 0, \dots, M-1$, where $t^{n,0} = t^n$, $t^{n,M} = t^{n+1}$. Denote $c_i^{n,m}$ the approximate concentration c at time $t^{n,m}$ and $c^{n,0} = c^n$. The advection equation is discretized in time using the explicit Euler method to obtain

$$\begin{cases} \phi_i \left(\frac{c_i^{n,m+1} - c_i^{n,m}}{\Delta t_c} \right) + u \left(\frac{c_i^{n,m} - c_{i-1}^{n,m}}{h_{i-1/2}} \right) = 0, & i = 2, \dots, N_g, \quad m = 0, \dots, M-1. \\ c_1^{n,m+1} = c_g(t^{n,m+1}) \end{cases} \quad (7)$$

Diffusion step The diffusion part is discretized by an implicit Euler scheme, starting from $c_i^{n,M}$:

$$-\frac{D_{i-\frac{1}{2}}}{h_{i-\frac{1}{2}}} \Delta t c_{i-1}^{n+1} + \left(\phi_i h_i + \frac{D_{i+\frac{1}{2}}}{h_{i+\frac{1}{2}}} \Delta t + \frac{D_{i-\frac{1}{2}}}{h_{i-\frac{1}{2}}} \Delta t \right) c_i^{n+1} - \frac{D_{i+\frac{1}{2}}}{h_{i+\frac{1}{2}}} \Delta t c_{i+1}^{n+1} = \phi_i h_i c_i^{n,M} + q_i h_i \Delta t, \quad i = 2, \dots, N_g - 1 \quad (8)$$

As above, 2 equations accounting for the boundary conditions must be added.

2.2 Chemical equations

The chemical model is described in this section. In this study, we assume a local chemical equilibrium at every point, which means that the chemical phenomena occur on much faster scale than transport phenomena. This is a common modeling assumption for reactive transport in porous media, at least when the only reactions

considered are aqueous phase and sorption reactions (these are “sufficiently fast” reactions according to Rubin [34]). This would not be the case if mineral dissolution was taken into account, as these reactions typically need kinetic models.

Consider a set of N_e chemical species $(X_j)_{j=1,\dots,N_e}$ linked by N_r reactions

$$\sum_{j=1}^{N_e} \nu_{ij} X_j \rightleftharpoons 0, \quad i = 1, \dots, N_r$$

where ν is the stoichiometric matrix. Following Morel [32], we distinguish between *component* and *secondary* species by extracting a full rank matrix from ν . Component species are a minimal subset of the species such that the other secondary species can be written in terms of them (in a unique way). Each secondary species gives rise to a reaction that expresses how it is formed in terms of the components, and to a mass action law that gives the value of its *activity* in terms of the component activities. Similarly, each component gives rise to a conservation equation, expressing how the given total concentration of such a component is distributed among the component itself and the secondary species.

Additionally, in the context of reactive transport, it is required to know how the species are split between those that are in solution, and those that have been adsorbed on the solid matrix (in this paper we do not take precipitation into account). We thus introduce (with obviously $N_e = N_c + N_s + N_x + N_y$)

- mobile components c_j , $j = 1, \dots, N_c$,
- fixed components s_j , $j = 1, \dots, N_s$,
- mobile secondary species x_j , $i = 1, \dots, N_x$,
- fixed secondary species y_j , $i = 1, \dots, N_y$.

We have identified the name of the species with their concentrations, and we assume an ideal solution (activities and concentrations are identified). Mobile secondary species x can be expressed as linear combinations of mobile components while secondary fixed species depend on both mobile and fixed components. Therefore the mass action laws are written as

$$x_i = K_{xi} \prod_{j=1}^{N_c} c_j^{S_{ij}}, \quad i = 1, \dots, N_x, \quad y_i = K_{yi} \prod_{j=1}^{N_c} c_j^{A_{ij}} \prod_{j=1}^{N_s} s_j^{B_{ij}}, \quad i = 1, \dots, N_y, \quad (9)$$

where K_{xi} and K_{yi} are the equilibrium constants, and S_{ij} , A_{ij} and B_{ij} are the entries of the stoichiometric matrices $S \in \mathbf{R}^{N_c \times N_x}$, $A \in \mathbf{R}^{N_c \times N_y}$ and $B \in \mathbf{R}^{N_s \times N_y}$.

Mass conservation for each component is expressed in the form

$$c + S^T x + A^T y = T, \quad s + B^T y = W, \quad (10)$$

where T_j is the total concentration of the mobile component j , and W_j is the total concentration of the fixed component j (T and W are vectors of size N_c and N_s respectively). In the case of ion exchange, the second mass conservation equation is simply $B^T y = W$, and W is the Cationic Exchange Capacity of the porous matrix (see Appelo and Postma [2]). As will be seen later, in the context of coupled transport and chemistry, T_j is given by the transport model and W is constant. In a closed chemical system, T_j would be part of the data (total concentration of the components).

Due to the wildly different orders of magnitude of the concentrations that are commonly encountered, the chemical problem is reformulated by using as main unknowns the logarithms of the concentrations. This has the added advantage that concentrations are automatically positive, and has become the standard way to solve the problem [28]. An additional advantage has been pointed out by Samper et al. [41]: by taking the logarithms of the concentrations as unknowns, the Jacobian of the nonlinear system is symmetric, and with a proper choice of the component species, it can be shown to be diagonally dominant, and thus nonsingular. The symmetry can also be seen on equation (16) below. Let $\log u$ be the vector with entries $\log u_i$, where u_i are the entries of vector u . Equations (9) can then be rewritten as a linear system

$$\begin{aligned} \log x &= \log K_x + S \log c \\ \log y &= \log K_y + A \log c + B \log s \end{aligned} \quad (11)$$

The nonlinear system of equations (10) and (11) forms what will be called the *chemical problem*. In the sequel, it will be assumed that this problem always has a (positive) solution (c, s) , for all feasible values of the data T and W . This is true in our simplified settings because the chemical equilibrium problem is a consequence of the minimization of the Gibbs free energy, which can be shown to be convex in the absence of minerals (see [42]).

To solve the chemical problem, a variant of Newton's method is used. As is well known, Newton's method is not always convergent, unless the initial point is sufficiently close to the solution. However, and this is especially true in the context of a coupled code where the chemical problem will be solved repeatedly, it is essential to ensure that the solver "never" fails. We have found that using a globalized version of Newton's method (using a line search, cf. [23]) was effective in making the algorithm converge from an arbitrary initial guess. In order to get a smaller system, the secondary concentrations are eliminated, and the system to be solved involves only $lc = \log c \in \mathbf{R}^{N_c}$ and $ls = \log s \in \mathbf{R}^{N_s}$. Define the function $H : \mathbf{R}^{N_c+N_s} \rightarrow \mathbf{R}^{N_c+N_s}$ by

$$H \begin{pmatrix} lc \\ ls \end{pmatrix} = \begin{pmatrix} \exp(lc) + S^T \exp(\log K_x + Slc) + A^T \exp(\log K_y + Alc + Bls) \\ \exp(ls) + B^T \exp(\log K_y + Alc + Bls) \end{pmatrix} \quad (12)$$

where the notation $\exp(v)$ for a vector v means the vector with elements $\exp(v_j)$, then equations (10) and (11) are equivalent to:

$$H \begin{pmatrix} lc \\ ls \end{pmatrix} = \begin{pmatrix} T \\ W \end{pmatrix}. \quad (13)$$

This is the nonlinear system that to be solved for lc and ls , given T and W . The secondary concentrations can then be computed from equation (11).

When solving the coupled problem, the distribution of the species between their mobile form and their fixed form will be needed. The individual concentrations must still be solved for, but they are intermediate quantities. Once the component concentrations have been computed as described in the previous paragraph, one can compute for each species its mobile part C_j and its fixed part F_j by

$$C = c + S^T x, \quad F = A^T y. \quad (14)$$

Note that, by definition, the relationship $T = C + F$ holds.

In the formulation to be presented below, it will be convenient to represent the mapping from the vector of total concentrations to the vector of fixed concentrations. This mapping, denoted by Ψ , is defined by first solving the chemical problem (13), then computing F by (14). More precisely

$$\begin{aligned} \psi : \mathbf{R}^{N_c} &\rightarrow \mathbf{R}^{N_c} \\ T &\mapsto \psi(T) = A^T y, \end{aligned} \quad (15)$$

where equation (13) is first solved for lc and ls , then y is computed by (11).

It is important to keep in mind that computing $\Psi(T)$ means solving the chemical system (plus some simple computations), as this will be the most expensive part when evaluating the residual of the coupled system (see eq.(26) in section 3.2).

As this will be useful later on, the computation of the Jacobian of Ψ is outlined here. Assume $\Psi(T)$ itself has been computed, so that the nonlinear system (13) has been solved. First, the Jacobian matrix of H should also be computed as part of the solution process. This is almost certainly needed for solving the chemical problem, if Newton's method is used. Differentiating equation (12) leads to:

$$H' \begin{pmatrix} lc \\ ls \end{pmatrix} = \begin{pmatrix} \text{diag}(\exp(lc)) & 0 \\ 0 & \text{diag}(\exp(ls)) \end{pmatrix} + \begin{pmatrix} S^T & A^T \\ 0 & B^T \end{pmatrix} \begin{pmatrix} \text{diag}(x) & 0 \\ 0 & \text{diag}(y) \end{pmatrix} \begin{pmatrix} S & 0 \\ A & B \end{pmatrix}, \quad (16)$$

where $\text{diag}(v)$ is the diagonal matrix with vector v along the diagonal. Then, by an application of the implicit function theorem (see for instance [35]), and by differentiating equation (11), there comes

$$\psi'(T) = A^T \text{diag}(y) (A \ B) \left(H' \begin{pmatrix} lc \\ ls \end{pmatrix} \right)^{-1} \begin{pmatrix} I \\ 0 \end{pmatrix}. \quad (17)$$

It should be stressed that the Jacobian of H is needed to compute the Jacobian of Ψ (inverting it is straightforward, as this will usually be a small matrix). This may prove problematic in practice for several reasons. First, the chemical solver may not give access to the Jacobian, even if it is used internally. This is a limitation to the “black-box” approach. Second, for more realistic chemical models, including non-ideal chemistry, and taking minerals into account, computing the Jacobian may be much more difficult than the fairly simple computation outlined above. As a last resort, one could compute the Jacobian by finite differences, but it will be argued in section 3.2 that, for this particular problem, the analytical computation is more efficient.

2.3 Coupled transport and chemistry

The starting point for the coupled model is the following set of equations for the total, mobile and fixed concentrations of each component

$$\begin{cases} \phi \frac{\partial C_j}{\partial t} + \phi \frac{\partial F_j}{\partial t} + L(C_j) = 0 & j = 1, \dots, N_c \\ \frac{\partial W_j}{\partial t} = 0, & j = 1, \dots, N_s \end{cases} \quad (18)$$

These equations can be derived from the individual conservation equations by standard algebraic manipulations, see for instance Yeh and Tripathi [47]. It is the formulation given in the benchmark definition [6], see also [37], [11]. The second equation is obvious, as W_j was taken as a constant (at each point in space).

Taking into account the relation $T_j = C_j + F_j$, $j = 1, \dots, N_c$ noted above, the first equation of the system is equivalent to

$$\phi \frac{\partial T_j}{\partial t} + L(C_j) = 0 \quad j = 1, \dots, N_c, \quad (19)$$

where T_j is the total concentration, C_j the total mobile concentration, and F_j the total fixed concentration for component j .

From now on, L will denote the discretized transport operator, as defined in equation (6). Each unknown concentration depends on both the grid point index, and the chemical species index. We will use a notation inspired from Matlab. For a concentration u_{ij} , where $i \in [1, N_g]$ represents the spatial index and $j \in [1, N_c]$ represents the chemical index, we shall denote by

- $u_{:,j}$ the column vector of concentrations of species j at all grid points;
- $u_{i,:}$ the row vector of concentrations of all chemical species in grid cell x_i .

The unknowns will be numbered first by chemical species, then by grid points. Thus all the unknowns for a single grid point are numbered contiguously.

The coupled problem is obtained by putting together equation (19) above with the definition of the chemical solution operator ψ , defined in eq. (15) (the subscript T denotes transposition):

$$\begin{cases} M \frac{\partial C_{:,j}}{\partial t} + M \frac{\partial F_{:,j}}{\partial t} + L(C_{:,j}) = g_{:,j} & j = 1, \dots, N_c \\ T_{ij} = C_{ij} + F_{ij}, & i = 1, \dots, N_g, j = 1, \dots, N_c \\ F_{i,:} = \psi((T_{i,:}^T)^T), & i = 1, \dots, N_g \end{cases} \quad (20)$$

This system is then discretized in time to obtain the fully discrete coupled nonlinear system. In this work we restrict to a simple backward Euler scheme with constant step-size, noting that other more sophisticated strategies are obviously possible (in particular, an adaptive step-size is essential for efficiency). Denoting time indexes by a superscript, the following system is obtained

$$\begin{cases} M \frac{C_{:,j}^{n+1} - C_{:,j}^n}{\Delta t} + M \frac{F_{:,j}^{n+1} - F_{:,j}^n}{\Delta t} + L(C_{:,j}^{n+1}) = g_{:,j} & j = 1, \dots, N_c \\ T_{ij}^{n+1} = C_{ij}^{n+1} + F_{ij}^{n+1} & i = 1, \dots, N_g, j = 1, \dots, N_c \\ F_{i,:}^{n+1} = \psi((T_{i,:}^{n+1})^T)^T & i = 1, \dots, N_g \end{cases} \quad (21)$$

This is the system to be solved at each time step.

3 Formulation and coupling algorithms

The formulation of reactive transport seen above gives rise to a large system of nonlinear equations. For complex problems, its solution will require a large amount of computer time, which makes it important to choose an appropriate method. In this section, several formulations and approaches that have appeared in the literature will be reviewed.

Thanks to the relationship $T = C + F$, it is easy to eliminate one of the 3 variables, and this leads to different formulations for the coupled problem, depending on which variables are kept in the transport equation. We keep the system continuous in time, as it makes the notation somewhat lighter, but the same manipulations can obviously be done at the discrete level too.

According to Saaltink et al. [37], see also Salignac [40], one can derive three main formulations from the system given in (20):

- formulation (TC) where T is the principal variable, C the transported variable

$$M \frac{\partial T_{:j}}{\partial t} + L(C_{:j}) = g_{:,j} \quad (22)$$

This is the formulation used by Erhel et al. in [9, 11], as it lends itself best to a DAE type algorithm. It is not convenient for our purpose, as the transport equation then involves both T and C , and is thus not easily used with an existing transport solver.

- formulation (TT) where T is the principal variable, T transported variable

$$M \frac{\partial T_{:j}}{\partial t} + L(T_{:j}) + L(F_{:j}) = g_{:,j} \quad (23)$$

This seems to be the least satisfactory formulation, as the transport operates on the fixed species, and for this reason it will not be considered further.

- formulation (CC) where C is the principal variable, C transported variable

$$M \frac{\partial C_{:j}}{\partial t} + M \frac{\partial F_{:j}}{\partial t} + L(C_{:j}) = g_{:,j} \quad (24)$$

This is formulation 4 in Saaltink et al. [37], and is the formulation chosen below. It has been reported that this formulation is the least suitable for use in an operator split algorithm, because C and F are used at different time levels (to compute the data for the chemical problem). When this formulation is used in a global method this should not matter as much, as the iterations are ran to convergence, and both values should eventually get close to their limits.

Formulation (CC) will be used in the rest of the paper, because it takes the form of a standard transport operator, with a source term coming from the chemical part. Its structure is closely related to the system describing single species transport with sorption, as seen for instance in [16], or [21], with the main differences that the unknown is a vector of concentration, and mostly that what plays the role of the sorption isotherm is the implicitly defined function Ψ introduced in (15).

3.1 Review of former approaches

At each time step, the system given by (21) (one transport equation for each component and one chemical system for each grid point) forms a large nonlinear system, whose size is the number of components times the number of grid points. This system has traditionally been solved by a sequential two-steps approach, as reviewed below (cf. [47]). However, this method suffers from several defects: it may severely restrict the step

size to ensure convergence, and if used non-iteratively it is only first order in time, which may introduce additional errors (cf. [4]). Due to its quadratic convergence rate, Newton's method would be an ideal candidate for solving the system. On the other hand, a practical difficulty has to be reckoned with: Newton's method requires the solution of a linear system with the Jacobian matrix at each iteration step. In realistic situations, it will not be possible to store, much less factor, the Jacobian matrix. As will be seen in section 3.2, this difficulty can be overcome by resorting to an iterative method for solving the linear system.

3.1.1 Sequential approach

The sequential approach consists of separately solving the chemical equations and the transport equations. The method has been used in numerous papers: see for instance [47], and also [21], [29], [37], [4] or [30]. At each iteration, a transport equation for each component is solved first, with a source term given by the (change in) fixed concentration at the previous iteration. This total mobile concentrations will be added to a total fixed concentration computed in the previous iteration, to obtain the total used as data for solving a chemical problem at each grid point. These steps are then iterated until convergence.

In the geochemical literature, this is known as an operator splitting approach (usually called Standard Iterative Approach, or SIA), but it is more properly a block Gauss-Seidel methods on the coupled system, as each subsystem is solved alternatively. The method is quite appealing, as it is easy to implement starting from separate transport and chemistry codes, and can provide good accuracy if implemented carefully, as shown in the references above). As will be seen below, these advantages can be retained in the Newton–Krylov framework.

The Standard Non-Iterative Approach (SNIA) is the case where only one iteration of the method is carried out at each time step. In that case, splitting errors can become important, and the method is not really suitable for difficult problems.

The SIA approach does not suffer from splitting errors if the tolerance is small enough, but it may require a small time step to obtain convergence in the case of stiff problems. The main drawback of the method is thus that the size of the time step is used to control convergence, and not based on the physical character of the solution.

3.1.2 Direct Substitution Approach

As computing power increased, it was recognized that the operator splitting methods of the previous sections could not satisfactorily handle difficult problems, and more tightly coupled method came to more widespread use.

The Direct Substitution Approach method consists in solving for the individual concentrations of the components, that is *substituting* equations (10)–(11) in equation (1) (this can be done explicitly, as in Hammond et al. [17], or implicitly, as in Kräutle et al. [25, 26], or Saaltink et al. [37]). It is also possible to reformulate the problem as a differential algebraic system (DAE), and to take advantage of the high quality software available for such problems, as in Erhel et al. [11], [10] or [8]. A high performance parallel implementation is described by Hammond et al. [17], using a Jacobian–Free Newton–Krylov method (see section 3.2).

The main advantages of this approach are to avoid the errors caused by the separation of operators, and to allow fast convergence independently of the time step, but its principal drawback is the need to form and to store the Jacobian matrix especially for a large problem. Moreover, sometimes it may be difficult to calculate the exact derivatives for geochemical processes especially when precipitation phenomena or kinetic reactions are taken into account.

The size of the system can be made smaller by means of a reduction method, cf Kräutle et al. [25, 26], and [18]. The reduction method makes a change of variables in the chemical system, so that a set of decoupled transport equation is first solved, leaving a smaller nonlinear system, that is still solved with Newton's method.

3.2 A Newton–Krylov based fully coupled method

As was already mentioned in the previous section, Hammond et al. [17] have used a Newton–Krylov method for solving the system obtained from the DSA approach. Substituting the chemical equations in the transport operator is the most straightforward way of formulating the coupled problem, but leads to a system where chemistry and transport terms are mixed, and makes it virtually impossible to separate the transport and chemistry modules. However, this separation is seen as one of the important advantages of the operator splitting approaches.

By coupling the formulation given in section 2.3 with the Newton–Krylov framework, a strongly coupled method that can be implemented by keeping transport and chemistry separate is obtained. Thus, the chemical equations are not directly substituted in the transport equation, but the function Ψ introduced previously in (15) is used to represent the effect of chemistry. Different formulations could be adopted depending on the choice of unknowns (refer back to section 3). In this work, both the total mobile and fixed concentrations, and also the total concentrations (though they could easily be eliminated) are chosen as main unknowns.

Even though this method may be more expensive than the methods based on DSA, its main advantage is to make it possible to treat chemistry as a black–box, even in the Newton–Krylov context. This may be important, as chemical simulators are becoming increasingly sophisticated.

Recall (equation (21)) that the nonlinear system to be solved at each time step is

$$\begin{cases} (M + \Delta t L)C_{:,j}^{n+1} + MF_{:,j}^{n+1} - b_{:,j}^n & = 0, \quad j = 1, \dots, N_c \\ T^{n+1} - C^{n+1} - F^{n+1} & = 0, \\ F_{i,:}^{n+1} - \Psi \left((T_{i,:}^{n+1})^T \right)^T & = 0, \quad i = 1, \dots, N_g \end{cases} \quad (25)$$

where $b_{:,j}^n = MC_{:,j}^n + \Delta t g_{:,j}^{n+1} + M\Delta t F_{:,j}^n$ is known.

Denoting by $G : \mathbf{R}^{3N_c N_g} \rightarrow \mathbf{R}^{3N_c N_g}$ the function

$$G \begin{pmatrix} C \\ T \\ F \end{pmatrix} = \begin{pmatrix} \left((M + \Delta t L)C_{:,j} + MF_{:,j} - b_{:,j}^n \right)_{j \in [1, N_c]} \\ T - C - F \\ \left(F_{i,:} - \Psi \left((T_{i,:})^T \right)^T \right)_{i \in [1, N_g]} \end{pmatrix}, \quad (26)$$

the nonlinear problem to be solved at each time step is $G(Z) = 0$, where Z denotes the vector $\begin{pmatrix} C^{n+1} \\ T^{n+1} \\ F^{n+1} \end{pmatrix}$.

Recall that at each step of the “pure” form of Newton’s method for solving $G(Z) = 0$, one should compute the Jacobian matrix $J = G'(Z^k)$, solve the linear system (usually by Gaussian elimination)

$$J \delta Z = -G(Z^k) \quad (27)$$

and then set $Z^{k+1} = Z^k + \delta Z$. In practice, one should use some form of globalization procedure in order to ensure convergence from an arbitrary starting point. If a line search is used, the last step should be replaced by $Z^{k+1} = \delta Z + \lambda Z^k$, where λ is determined by the line search procedure.

The main drawback of the method for large scale problems is again the need to form, and then factor, the Jacobian matrix. For coupled problem such as the one studied in this paper, there is the additional difficulty of simply computing the Jacobian: the numerical methods for transport and chemistry are quite different, and it is even possible that the simulation codes have been written by different groups.

The Newton–Krylov method (see [23], [24] and [17], to which our work is closely related), is a variant of Newton’s method where the linear system that arises at each step of Newton’s method is solved by an *iterative* method (of Krylov type). The main advantage of this type of method is that the full Jacobian is not needed, one just needs to be able to compute the product of the Jacobian with a vector. As this is a directional derivative, this leads to the Jacobian free methods, where this product is approximated by finite differences. However, for

some problems, it may be possible to compute the needed directional derivative exactly. As will be seen below, this is the case for our coupled problem, provided the Jacobian of the chemical problem can be computed. This is both cheaper and more accurate.

The main contribution of this paper is to show that the formulation given above lends itself to an implementation of Newton’s method that allows to keep the two codes separate. This is in keeping with the philosophy set forth in the review paper by Keyes and Knoll [24] that a Newton-Krylov solver can often be made by wrapping a classical split-step solver. This is what is being done here, as the formulation to which the Newton-Krylov method is applied is the one used for operator splitting. Additionally, it will be shown below that the Jacobian may even be formed in block form, provided the individual codes provide their Jacobians (this is obviously easier for transport than for chemistry), and this obviously carries over to the Jacobian–vector product.

At this point, it is appropriate to add a few comments on the size of the problems envisioned. The examples used in this work are small scale, one dimensional, problems. They can hardly be called large. On the other hand, we believe they are representative of the problems that will be encountered in more realistic applications. For such problems, in 2 or 3 space dimensions, involving tens or hundreds of thousands of grid points and several tens of chemical species, the nonlinear system will indeed be very large, and a method like that of Hammond et al. [17], or like the method presented in this section will be necessary.

A Krylov subspace method (see for instance [23]) is used to approximately solve the linear system in equation (27). The linear iterates are drawn from the Krylov subspace, $K_j = \text{span}\{r_0, Jr_0, J^2r_0, \dots, J^{j-1}r_0\}$. In the GMRES method (see [36]), the iterates are defined to minimize the residual $\|J\delta Z_j + G(Z)\|_2$ over K_j . Other methods, such as Bi-CGSTAB [45] or QMR [15] could be used as well.

As the linear system is not solved exactly, the convergence theory for Newton’s method does not apply directly. However, the theory has been extended by Dembo et al. [7] to the class of Inexact Newton methods, of which the Newton–Krylov methods are representatives. The main consequences of this analysis are summarized below.

An important issue in such methods is the stopping criterion for the inner linear iteration. A stopping criterion of the form

$$\|J\delta Z + G(Z^k)\| \leq \eta_k \|G(Z^k)\| \quad (28)$$

in this context, as the initial iterate is usually 0. The choice of the *forcing term* η_k should strike a balance between two conflicting goals:

- Keep the (local) convergence of Newton’s methods;
- Avoid over-solving, that is taking too many linear iterations when still far away from the nonlinear solution.

The first goal will tend to require a small value for η_k , while the second one obviously tends to make η_k larger. It has been shown (see theorem 6.1.4 in [23]) that provided η_k is bounded away from 1, the inexact Newton’s method will converge, and that superlinear convergence obtains if η_k goes to zero faster than $\|G(Z^k)\|$. Based on this result, the strategy proposed by Kelley in [23] (after the choice in [12]) computes η_k as

$$\eta_k = \gamma \|G(Z_k)\|^2 / \|G(Z_{k-1})\|^2, \quad (29)$$

where $\gamma \in [0, 1]$ is a parameter (the value suggested in [23] is $\gamma = 0.9$). Safeguards are added to this choice in order to prevent η_k to become too close to 1, or too small. It is also necessary to globalize the algorithm, and this can be done using a line search, just as in the “classical” Newton’s method.

The other main practical advantage of the Newton–Krylov methods is that they do not require forming the Jacobian matrix. All that is needed is the ability to compute the product of the Jacobian matrix by an arbitrary vector, in order to enlarge the Krylov subspace. This matrix–vector product can be interpreted as a directional derivative. This means that, for complex functions G it may not be necessary to compute the Jacobian, at the cost of one extra evaluation of the function itself. It turns out, however, that in our case, this trade-off is not advantageous. Indeed, it is well known that the most expensive part of the evaluation of G is the solution of the chemical problem at each grid point. On the other hand, it was shown above that computing the Jacobian of ψ is actually cheaper than computing ψ itself (once ψ has already been computed), as it only involves the

solution of a linear system (see equation (17)), whereas computing ψ itself requires the solution of a nonlinear system.

It will now be shown how the method can be implemented, given modules for transport and chemistry.

The first ingredient needed is the computation of the residual, that is evaluating the function G defined in (26). Given a vector $Z = \begin{pmatrix} C \\ T \\ F \end{pmatrix}$, Z is first split into its three components, and each sub-vector is regarded as a $N_g \times N_c$ matrix, as in section 2.3. Then $G(Z)$ is computed by block:

- For the transport block, the transport operator is applied to each species $C_{:,j}$, with a source term given by $-M \frac{F_{:,j} - F_{:,j}^n}{\Delta t}$, for $j = 1, \dots, N_c$ (F^n denotes F at the previous time step);
- The second block is the trivial computation $T - C - F$;
- The third block is the solution of the chemical problem at each grid point: $F_{:,i} - \Psi(T_{i,:})$, for $i = 1, \dots, N_g$.

This shows that the first block will only need transport related quantities, whereas the third block will only call chemistry related ones. Actually, these are the same computations that would be needed for implementing an operator splitting method.

As far as the Jacobian matrix–vector product is concerned, and using the computation in section 2.2, the action of the Jacobian on a vector $v = \begin{pmatrix} v_C \\ v_T \\ v_F \end{pmatrix}$ (that is the directional derivative of G in the direction of the vector v) can be computed as

$$J \begin{pmatrix} v_C \\ v_T \\ v_F \end{pmatrix} = \begin{pmatrix} ((M + \Delta t L) v_{C:,j} + M v_{F:,j})_{j \in [1, N_c]} \\ -v_C + v_T - v_F \\ (v_{F i,:} - v_{T i,:} (\Psi'(T_{i,:}^T))^T)_{i \in [1, N_g]} \end{pmatrix}. \quad (30)$$

Even though it is not used as such in this work, it is valuable to examine the structure of the Jacobian. As the previous computation shows, the Jacobian also has a natural block structure. Recall that the unknowns are numbered by species at each point in space. Then the block corresponding to the action of L can be written using the Kronecker product (see for instance [19]) as $A = (M + \Delta t L) \otimes I$. Then the Jacobian matrix is

$$J = \begin{pmatrix} A & 0 & M \\ -I & I & -I \\ 0 & -\Psi'(T^T) & I \end{pmatrix}, \quad (31)$$

where $\Psi'(T) = \text{diag}(\Psi'(T_{1,:}^T), \dots, \Psi'(T_{N_g,:}^T))$ is the Jacobian of Ψ , and for each $i = 1, \dots, N_g$, $\Psi'(T_{i,:}^T)$ is a small N_c by N_c block. The structure of the Jacobian is illustrated on figure 1, for the case $N_g = 10$, $N_c = 3$. It is a 3×3 block matrix, each block being of size $N_g \times N_c$. We can clearly see the different parts of the Jacobian: the transport part in the upper left corner has 3 diagonals corresponding to the Kronecker product structure (remember that L is tridiagonal), and the chemistry part at the bottom has 10 3×3 blocks.

It would in principle be possible to compute and store the Jacobian matrix according to equation (31) as a sparse matrix, and to compute the matrix–vector product using a general purpose routine. The advantage of the method given in equation (30) is that the structure of the Jacobian is fully exploited, which leads to a much more economical computation.

4 Numerical results

4.1 Ion exchange

The following example of advective transport in the presence of a cation exchanger is adopted as a first test case comparison of both approaches. The example is used in the documentation of PHREEQC-2 [33] as Example 11. The one-dimensional simulation problem describes a column experiment where the chemical composition of the effluent from a column containing a cation exchanger is simulated. Initially, the column contains a sodium-potassium-nitrate solution in equilibrium with the cation exchanger. The column is then flushed with three

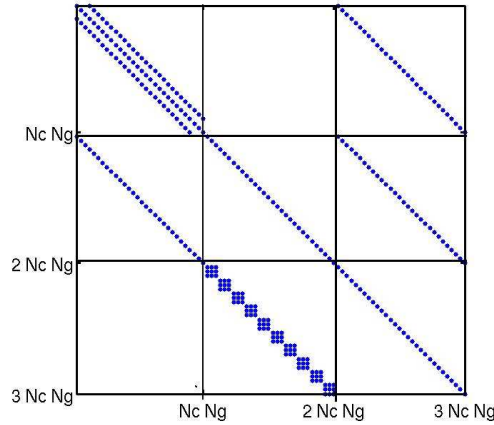


Fig. 1: The block structure of the Jacobian matrix

pore volumes of calcium chloride solution, so that an equilibrium state with calcium and chloride is reached. Calcium, potassium, and sodium react to equilibrium with the exchanger at all times. The flow and transport parameters used for this example are presented in Table 1, and the initial and injected concentrations are listed in Table 2. The Cationic Exchange Capacity for the exchanger is 1.1 mmol/l.


Darcy velocity	$2.78 \cdot 10^{-6}$ m/s
Diffusion coefficient	$5.56 \cdot 10^{-9}$ m ² /s
Length of column	0.08 m
Mesh size	0.0002 m
Duration of experiment	1 day
Time step	720 s

Table 1: Physical parameters

Component	C_{init}	C_{inflow}
Ca	0	$0.6 \cdot 10^{-3}$
Cl	0	$1.2 \cdot 10^{-3}$
K	$2.0 \cdot 10^{-4}$	0
Na	$1.0 \cdot 10^{-3}$	0

Table 2: Initial and injected concentrations

The chemical reactions for this example are:



with NaX, KX and CaX₂ are (sorbed) complexes, and X indicates exchange site with charge -1

4.1.1 Comparison with Phreeqc

Figure 2 shows elution curves, that is the evolution of the concentration of the various species at the end of the column, as a function of time. The sorbed potassium and sodium ions are successively replaced by calcium. Because potassium exchanges more strongly than sodium (as indicated by a larger value of log K in the exchange reaction), sodium is released first, followed by potassium. Finally when all of concentration has been released, the concentration of calcium increases to its steady-state value, the potassium is displaced from the exchanger and the concentration in solution increases to balance the Cl⁻ concentration.

Both the sequential method and the global method described in section 3.2 have been applied to the test case described in section 4.1. Both the computational demands and the accuracy of the solutions will be compared.

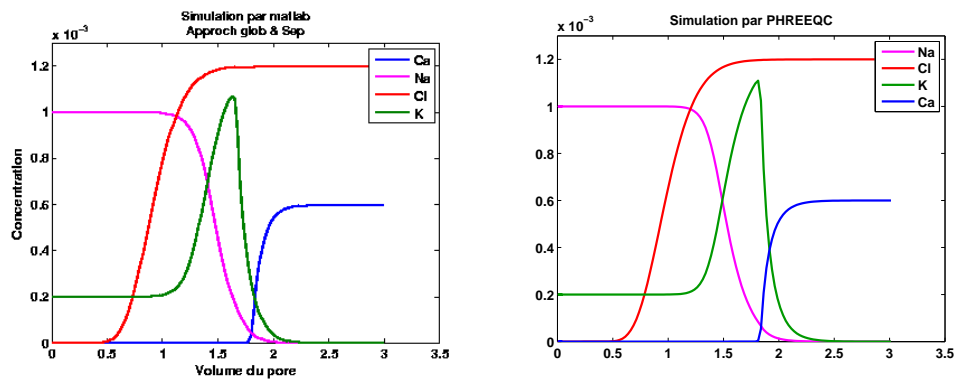


Fig. 2: Elution curves (concentrations at the end of the column) versus time, for the problem of section 4.1. Left: global method, right: PhreeqC reference.

As can be seen on figure 2, the results obtained are close to those computed by PhreeqC. One can still see differences both in the location and amplitude of the peak in potassium concentration, and in the region where the three curves cross. These results are also comparable to those obtained by Xu et al. [46].

4.1.2 Performance of the method

The CPU times for the iterative splitting, non iterative splitting and global approaches are compared on figure 3. The CPU time required for each method is plotted versus the number of the nodes of the grid. As expected, it can be seen that the non-iterative method requires much less CPU time than the iterative methods. On the other hand, the global approach described in the paper requires less time than the iterative splitting, at least for the simple chemical system considered here.

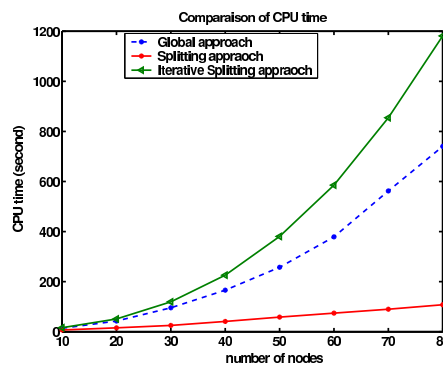


Fig. 3: Computing time for 3 methods applied to the ion exchange of section 4.1

For a single time step, the iterative splitting approach requires between 20 and 27 iterations on the average. The number of fixed point iterations increase with the number of the nodes in the grid. On the other hand, the number of Newton iterations for the Newton–Krylov method is less than 6, independently of the number of nodes. The number of Krylov iteration for each Newton step, however, does increase with the number of nodes. We go back to this issue in subsection 4.2.1.

4.2 The 1D “easy” MoMaS Benchmark

The global and the splitting approaches will now be applied to the 1D easy GDR Momas Benchmark, as described in the introductory paper to this special issue [6], see also the original description in [5]. Let us just recall that the model is a one-dimensional column, made of 2 different media: the part in the middle is less conductive but more reactive than the surrounding media. The chemical system has 5 components (4 mobile components and a fixed component), and 7 secondary species. The equilibrium constants vary over 50 orders of magnitude, and the stoichiometric coefficients can be as large as 4, making the problem highly non-linear.

First, results showing the evolution of the component species at various times, and using several spatial and temporal resolutions are shown on figure 4a. The left figure is at time $t = 10$, the right one at $t = 50$. As expected, the concentrations remain almost constant in the middle (reactive) region. Meshes with 220, 440, 660 and 880 points have been used, and in each case the time step is chosen as 0.9 times the limit fixed by the CFL condition. For these early times, the dependence on the mesh is not very strong. Elution curves (concentrations

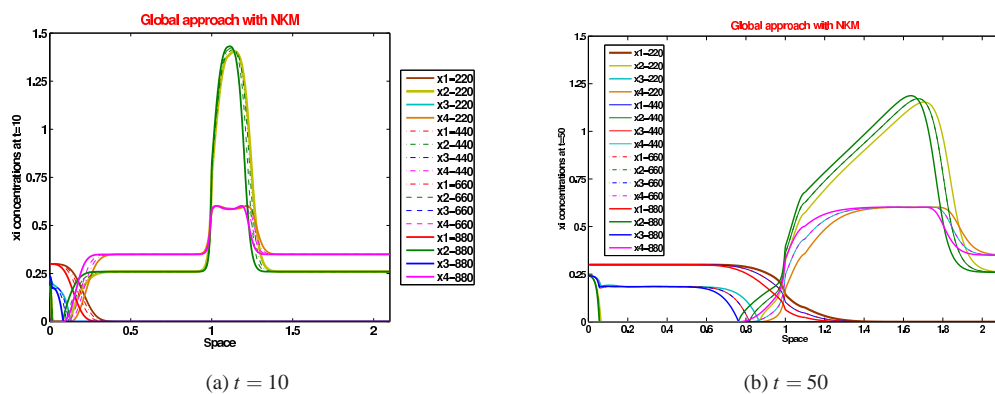


Fig. 4: Concentration of all components at times $t = 10$ and $t = 50$, for various mesh resolutions

at the end of the column as functions of time) are shown on figure 5, first for t going from 0 to 400 (figure 5a), then for t going from 4900 to 5300 (figure 5b). The elution curves show that the correct limiting behavior is reached before the leaching phase begins.

The output results required in the benchmark definition are included. Most were obtained with a 220 points mesh, which may not be sufficient, as will be seen below. It has not yet been possible to obtain results with a finer mesh resolution for significantly longer times.

Figures 6a, figures 6b and 6c (elution curve for the total dissolved concentration of component X3, a nd species C1) show an oscillations pattern that has been observed by other groups working on the benchmark. These oscillations have been convincingly explained by V. Lagneau [27] as being due to the interaction of the very rapid chemistry and the discrete nature of the grid. They are a discretization artifact, but appear independently of the method. They can be reduced by using a more refined grid.

Figures 7a and 7b show the influence on the mesh, by showing the concentration over a small spatial region, for time $t = 10$. The concentrations are computed with 4 meshes of increasing resolution. The peaks in the solution are not resolved satisfactorily for the coarser mesh, with 220 points, but 660 (and better 880) points give the correct location and amplitude. Even if the method as it is currently implemented cannot yet be considered as robust, its ability to locate these solution features with reasonably coarse meshes was seen as one of its strong points. Unfortunately, this may still not be enough to eliminate the oscillations shown on figure 6. This issue is currently being worked on, part of the difficulty being that increasing the mesh resolution may not

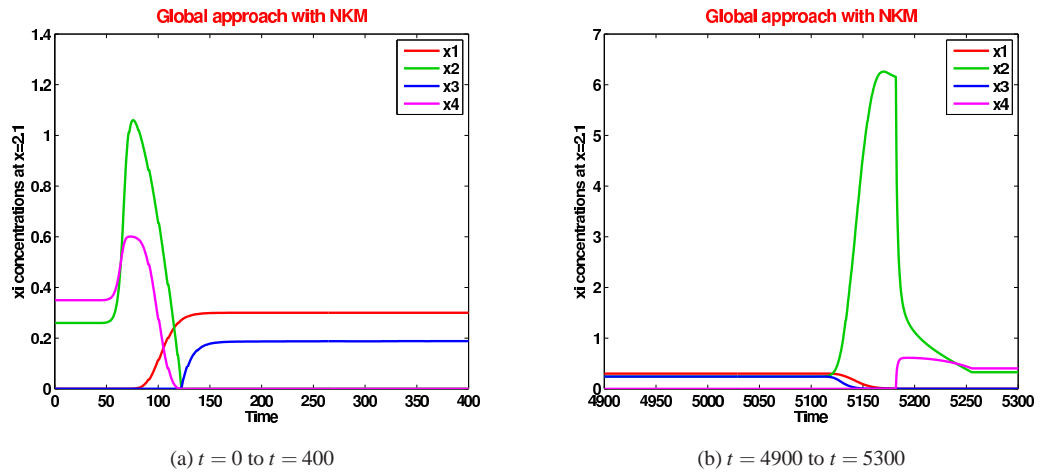


Fig. 5: Concentration of the components X1 and X4 at the end of the column ($x = 2.1$) as a function of time

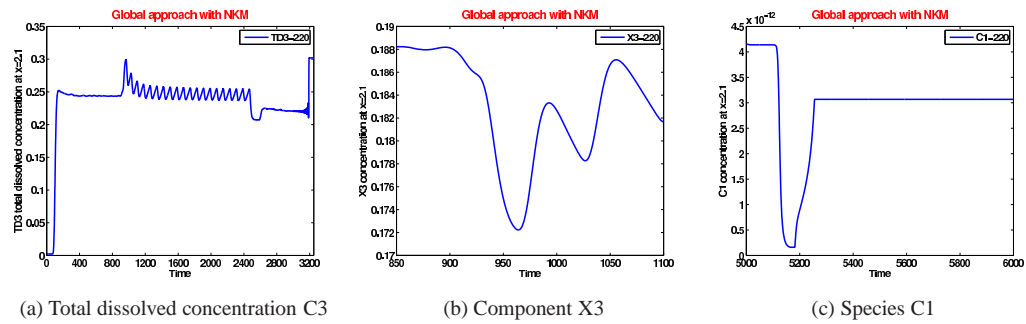


Fig. 6: Elution curve (concentrations at $x = 2.1$) as a function of time

be sufficient. As the nonlinear problem becomes more difficult, it may be necessary to increase the maximum number of iterations allowed to make sure the Newton–Krylov method has converged.

4.2.1 Performance of the method

The benchmark was intended to be a difficult test for numerical methods, and this is indeed the case. On the average, more than 20 Newton iterations are required at each time step, and between 15 and 40 conjugate gradient steps are needed at each nonlinear iterations.

Figure 8 shows a typical time step: the solid curve shows the cumulative number of conjugate gradient (alternatively, the number of matrix vector products), and the dots represent the nonlinear iterations.

Statistics for a single time step are gathered in table 3, for three different mesh resolutions (220, 440 and 660 points). They give the number of non-linear iterations (NNI) for a (typical) time step, and the total number of linear iterations (NLI) accumulated over the whole Newton iteration. The number of nonlinear iterations depends only weakly on the mesh resolution, whereas the number of linear iterations increases with the mesh resolution.

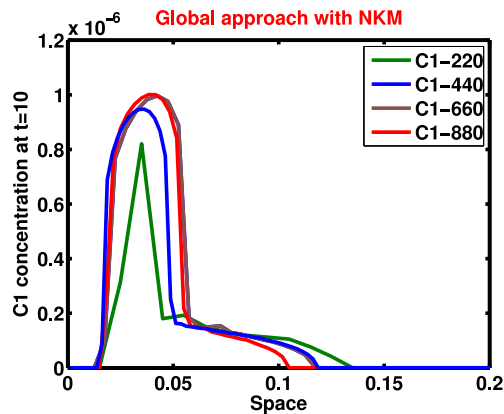
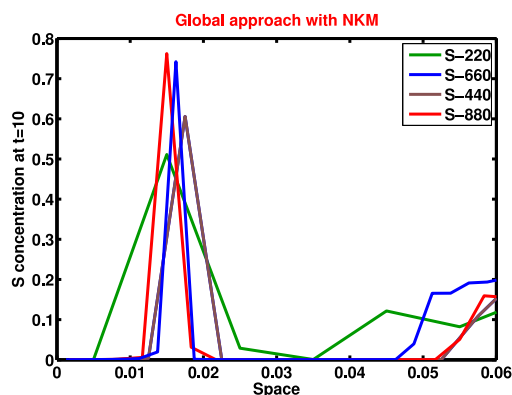
(a) Species X1, $t = 10$ (b) Component S, $t = 10$

Fig. 7: Concentration profiles

Mesh 220		Mesh 440		Mesh 660	
NNI	NLI	NNI	NLI	NNI	NLI
25	494	18	551	25	636

Table 3: Statistics on Newton and GNRES iterations, for one time step (NNI= Number of NonLinear Iterations, NLI= Number of Linear Iterations).

Table 3 shows that the solver spends a large proportion of its time in the linear solver, despite the adaptive choice of the forcing parameter (equation (29)). Moreover, the number of linear iterations for each nonlinear iteration also increases with the mesh resolution. Actually, this is expected, as the solution of the linearized problem includes the solution of the transport operator, which has an elliptic-like structure, so that its condition number grows like the square of the number of grid points. This problem could be alleviated by using a suitable preconditioner that would make the number of iterations independent of the mesh resolution (a domain decomposition preconditioner could be used as in [1]). As noticed by Hammond et al. [17], designing a matrix-free preconditioner (so as to be compatible with the Newton-Krylov framework) is a challenge. Natural choices would exploit the block structure of the Jacobian, the simpler ones being based on block-Jacobi, or block Gauss-Seidel. Operator-splitting as a preconditioner has also been proposed in [17]. These possibilities

are currently being explored, exploiting the block structure of the Jacobian, and the results will be reported in a forthcoming paper [44].

5 Conclusions– Perspectives

In this paper, it was shown that a global method for coupling transport with chemistry based on the Newton-Krylov technology can be implemented while keeping the transport and chemical solvers separated. The results shown are promising: it is possible to solve efficiently geochemical problems using the method, although there remains several issues that need to be addressed.

- The first is to run test cases on more demanding configurations, where the method can be expected to show its full potential. This includes the other MoMaS test cases, with a more complex chemistry model, and also an implementation of the method in 2 and 3 dimensions.
- It will then certainly be necessary to explore the question of how to precondition the Jacobian, in order to reduce the number of Krylov iterations. A natural avenue is to reuse the operator splitting methods, as proposed by [17]. A similar study is being carried out for a related, but simpler model, see [44].
- The results reported above used a fixed time step, which was clearly insufficient for the large interval of integration. To successfully solve difficult problems like the benchmark above, it will clearly be necessary to use adaptive time stepping.
- A more difficult problem will be to take into account precipitation–dissolution phenomena in the chemical model. As the models are non-differentiable, this makes it more difficult to employ Newton’s method.

As was apparent from the numerical experiments, the method also shows some limitations. The most serious is its high cost, as each evaluation of the residual involves the solution of a chemical problem at each grid point. The fact that the method has two levels of nonlinear iterations means that it may not be as robust as other global methods based on a single level of iterations. Finding a good preconditioner may not be a limitation, but most strategies will involve solving more transport problems, which will also incur a high cost.

Acknowledgments

The first author would like to express her sincere thanks to ITASCA Consultants, France for providing the necessary Ph.D fellowship to carry out this research in INRIA-Rocquencourt, France. The second author’s work was supported by Groupement MoMaS CNRS-2439. We gratefully acknowledge sponsorship of GDR MoMAS

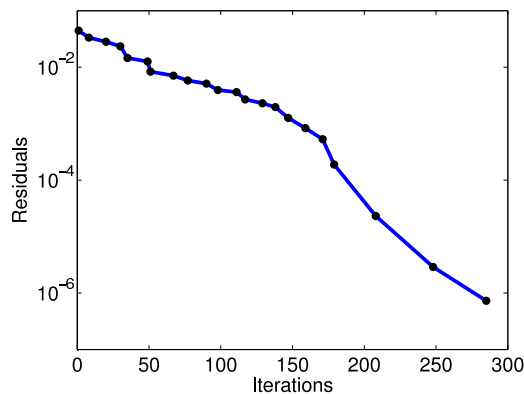


Fig. 8: Iterations

by ANDRA, BRGM, CEA, EDF and IRSN. Both authors thank the referees for their detailed comments, which led to significant improvements in the contents of the paper.

References

1. Achdou Y, Tallec PL, Nataf F, Vidrascu M (2000) A domain decomposition preconditioner for an advection-diffusion problem. *Computer Methods in Applied Mechanics and Engineering* 184(2-4):145–170, DOI DOI:10.1016/S0045-7825(99)00227-3
2. Appelo CAJ, Postma D (2005) *Geochemistry, Groundwater and Pollution*, 2nd edn. CRC Press
3. Ascher UM (2008) *Numerical Methods for Evolutionary Differential Equations*. Society for Industrial & Applied Mathematics
4. Carrayrou J, Mosé R, Behra P (2004) Operator-splitting procedures for reactive transport and comparison of mass balance errors. *Journal of Contaminant Hydrology* 68(3-4):239–268
5. Carrayrou J, Dimier A, Kern M, Knabner P, Letierrier N (2006) GDR MoMaS benchmark – reactive transport. published electronically at http://www.gdrmmas.org/ex_qualifications.html
6. Carrayrou J, Kern M, Knabner P (2009) Presentation of the MoMaS reactive transport benchmark. *Computational Geosciences This issue*
7. Dembo RS, Eisenstat SC, Steihaug T (1982) Inexact newton methods. *SIAM Journal on Numerical Analysis* 19(2):400–408, DOI 10.1137/0719025, URL <http://link.aip.org/link/?SNA/19/400/1>
8. de Dieuleveult C (2008) *Un modèle numérique global et performant pour le couplage géochimie-transport*. Thèse de doctorat, Université de Rennes 1
9. de Dieuleveult C, Erhel J (2007) A numerical model for coupling chemistry and transport. In: *International Conference on SCientific Computation And Differential Equations, SciCADE 2007*
10. de Dieuleveult C, Erhel J (2009) A global approach for reactive transport: application to the benchmark easy test case of MoMaS. *Comput Geosci This issue*
11. de Dieuleveult C, Erhel J, Kern M (2009) A global strategy for solving reactive transport equations. *Journal of Computational Physics* 228(17):6395–6410, DOI doi:10.1016/j.jcp.2009.05.044
12. Eisenstat SC, Walker HF (1996) Choosing the forcing terms in an inexact Newton method. *SIAM Journal on Scientific Computing* 17(1):16–32, URL citeseer.ist.psu.edu/article/eisenstat94choosing.html
13. Eymard R, Gallouët T, Herbin R (2000) Finite volume methods. In: Ciarlet PG, Lions JL (eds) *Handbook of Numerical Analysis*, vol VII, North-Holland, pp 713–1020
14. Fahs M, Carrayrou J, Younes A, Ackerer P (2008) On the efficiency of the direct substitution approach for reactive transport problems in porous media. *Water, Air, & Soil Pollution* pp 299–208, doi 10.1007/s11270-008-9691-2
15. Freund RW, Nachtigal NM (1991) QMR: a quasi-minimal residual method for non-Hermitian linear systems. *Numerische Mathematik* 60:315–339
16. Frolkovič P, Kačur J (2006) Semi-analytica solution of a contaminant transport equation with nonlinear sorption in 1D. *Computational Geosciences* 10(3):279–290, DOI 10.1007/s10596-006-9023-9
17. Hammond GE, Valocchi A, Lichtner P (2005) Application of Jacobian-free Newton–Krylov with physics-based preconditioning to biogeochemical transport. *Advances in Water Resources* 28:359–376
18. Hoffmann J, Kräutle S, Knabner P (2009) A parallel global-implicit 2-D solver for reactive transport problems in porous media based on a reduction scheme and its application to the MoMaS benchmark problem. *Comput Geosci This issue*
19. Horn RA, Johnson CR (1990) *Matrix Analysis*. Cambridge University Press
20. Hoteit H, Ackerer P, Mosé R (2004) Nuclear waste disposal simulations: Couplex test cases: Simulation of transport around a nuclear waste disposal site: The COUPLEX test cases (editors: Alain Bourgeat and Michel Kern). *Computational Geosciences* 8:99–124, DOI doi:10.1023/B:COMG.0000035074.37722.71, URL <http://www.ingentaconnect.com/content/klu/comg/2004/00000008/00000002/05379190>

21. Kanney JF, Miller CT, Kelley CT (2003) Convergence of iterative split operator approaches for approximating nonlinear reactive transport problems. *Advances in Water Resources* 26(247-261)
22. Kačur J, Malengier B, Remešikova M (2005) Solution of contaminant transport with equilibrium and non-equilibrium adsorption. *Comput Methods Appl Mech Engrg* 194:479–489, DOI <http://dx.doi.org/10.1016/j.cma.2004.05.017>
23. Kelley CT (1995) Iterative methods for linear and nonlinear equations, *Frontiers in Applied Mathematics*, vol 16. Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, with separately available software
24. Knoll DA, Keyes DE (2004) Jacobian-free Newton-Krylov methods: a survey of approaches and applications. *J Comput Phys* 193(2):357–397, DOI <http://dx.doi.org/10.1016/j.jcp.2003.08.010>
25. Kraeutle S, Knabner P (2005) A new numerical reduction scheme for fully coupled multicomponent transport-reaction problems in porous media. *Water Resources Research* 41(W09414), DOI doi:10.1029/2004WR003624
26. Kraeutle S, Knabner P (2007) A reduction scheme for coupled multicomponent transport-reaction problems in porous media: Generalization to problems with heterogeneous equilibrium reactions. *Water Resources Research* 43(W03429), DOI doi:10.1029/2005WR004465
27. Lagneau V, van der Lee J (2009) HYTEC results of the MoMas reactive transport benchmark. *Comput Geosci This issue*
28. van der Lee J (1993) CHESS, another speciation and surface complexation computer code. Tech. Rep. LHM/RD/93/39, CIG École des Mines de Paris, Fontainebleau
29. Lucille PL, Burnol A, Ollar P (2000) Chemtrap: a hydrogeochemical model for reactive transport in porous media. *Hydrological processes* 14:2261–2277
30. Mayer K, MacQuarrie K (2009) Formulation of the multicomponent reactive transport code MIN3P and implementation of MoMaS benchmark problems. *Comput Geosci This issue*
31. Mazzia A, Bergamaschi L, Putti M (2000) A time-splitting technique for the advection-dispersion equation in groundwater. *J Comput Phys* 157(1):181–198, DOI <http://dx.doi.org/10.1006/jcph.1999.6370>
32. Morel FMM, Hering JG (1993) *Principles and Applications of Aquatic Chemistry*. Wiley, New-York
33. Parkhurst DL, Appelo C (1999) User's guide to PHREEQC (version 2)- A computer program for speciation, batch-reaction, one-dimensional transport, and inverse geochemical calculations. Tech. Rep. 99-4259, USGS
34. Rubin J (1983) Transport of reacting solutes in porous media: Relation between mathematical nature of problem formulation and chemical nature of reactions. *Water Resources Research* 19:1231–1252
35. Rudin W (1976) *Principles of mathematical analysis*, 3rd edn. McGraw-Hill, New York :
36. Saad Y, Schultz MH (1986) GMRES: a generalized minimal residual algorithm for solving nonsymmetric linear systems. *SIAM J Sci Statist Comput* 7(3):856–869
37. Saaltink M, Ayora C, JCarrera (1998) A mathematical formulation for reactive transport that eliminates mineral concentrations. *Water Resources Research* 34(7):1649–1656
38. Saaltink M, Carrera J, Ayora C (2000) A comparison of two approaches for reactive transport modelling. *Journal of Geochemical Exploration* 69-70:97–101
39. Saaltink M, Carrera J, Ayora C (2001) On the behavior of approaches to simulate reactive transport. *Journal of Contaminant Hydrology* 48:213–235
40. Salignac AL (1998) Transport multi-espèces et réactions géochimiques en aquifère : développement et validation du modèle couplé HYTEC 2D. PhD thesis, École des Mines de Paris
41. Samper J, Xu T, Yang C (2009) A sequential partly iterative approach for multicomponent reactive transport with CORE2D. *Computational Geosciences* 13:301–316, DOI 10.1007/s10596-008-9119-5, URL <http://dx.doi.org/10.1007/s10596-008-9119-5>
42. Shapiro NZ, Shapley LS (1965) Mass action laws and the Gibbs free energy function. *J SOC Indust Appl Math* 13(2):353–375
43. Siegel P, Mosé R, Ackerer P, Jaffré J (1997) Solution of the advection-dispersion equation using a combination of discontinuous and mixed finite elements. *Journal for Numerical Methods in Fluids* 24:595–613

-
44. Taakili A, Kern M (2009) Linear and nonlinear preconditioning for a model of transport in porous media with sorption, in preparation
 45. van der Vorst HA (1992) Bi-CGSTAB: A fast and smoothly converging variant of Bi-CG for the solution of nonsymmetric linear systems. *SIAM Journal Sci Stat Comput* 13(2):631–644
 46. Xu T, Samper J, Ayora C, Manzano M, Custodio E (1999) Modeling of non-isothermal multi-component reactive transport in field scale porous media flow systems. *Journal of Hydrology* 214:144–164
 47. Yeh GT, Tripathi VS (1989) A critical evaluation of recent developments in hydrogeochemical transport models of reactive multichemical components. *Water Resources Research* 25:93–108