



Complexity in control-affine systems

Frédéric Jean, Dario Prandi

► **To cite this version:**

Frédéric Jean, Dario Prandi. Complexity in control-affine systems. NETCO 2014, 2014, Tours, France.
<hal-01024628>

HAL Id: hal-01024628

<https://hal.inria.fr/hal-01024628>

Submitted on 17 Jul 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Complexity in control-affine systems

Frédéric Jean¹ Dario Prandi²

¹ENSTA ParisTech
(and Team GECO, INRIA Saclay)

²LSIS
University of Toulon

NetCo 2014 – Tours, June 23th, 2014



We will consider affine-control systems, i.e., systems in the form

$$\dot{q}(t) = f_0(q(t)) + \sum_{i=1}^m u_i(t) f_i(q(t))$$

Here,

- the point q belongs to a smooth manifold M
- the f_i 's are smooth vector fields on M
- $u \in L^1([0, T], \mathbb{R}^m)$

This type of system appears in many applications

- Mechanical systems
- Quantum control
- Microswimmers (Tucsna, Alouges)
- Neuro-geometry of vision (Mumfor, Petitot)

- 1 Motion planning problem
- 2 Definitions of complexity
- 3 Asymptotic estimates in affine-control systems

- 1 Motion planning problem
- 2 Definitions of complexity
- 3 Asymptotic estimates in affine-control systems

Problem

Given $x, y \in M$, find an admissible trajectory steering the system from x to y , possibly under some constraints.

Possible constraints:


- 1 Avoiding some obstacles
- 2 Rendez-vous problem, i.e., being near certain places at certain times

Assumption

A metric with balls $B(q, \varepsilon)$ is fixed on M .


Method

Different approaches are possible. We consider the following method:

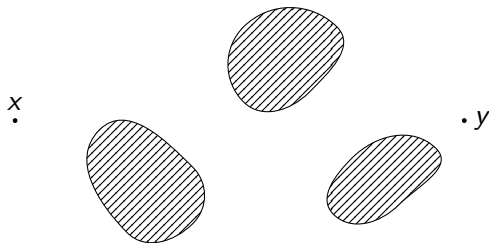


Different approaches are possible. We consider the following method:

- 1 Find an (non-admissible) curve $\Gamma \subset M$ or a path $\gamma : [0, T] \rightarrow M$ solving the problem.
- 2 Track Γ or γ with an admissible trajectory.

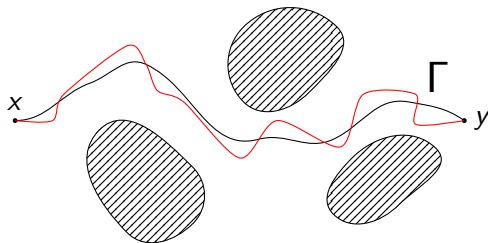

Different approaches are possible. We consider the following method:

- 1 Find an (non-admissible) curve $\Gamma \subset M$ or a path $\gamma : [0, T] \rightarrow M$ solving the problem. \rightarrow **global topology**
- 2 Track Γ or γ with an admissible trajectory. \rightarrow **local behavior of the control system**

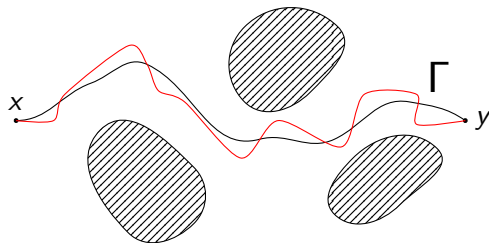

We focus on quantifying the difficulty of the second step.

- 1 Motion planning problem
- 2 Definitions of complexity
- 3 Asymptotic estimates in affine-control systems

Let $J : \mathcal{U} \rightarrow [0, +\infty)$ be a cost function.

Definition (Complexity)

A measure of the cost of approximation of a given curve/path with a certain precision

In general:

- 1 we fix a set $\text{Adm}(\Gamma, \varepsilon)$ of admissible controls for precision ε
- 2 we define complexity as

$$\sigma(\gamma, \varepsilon) = \inf_{u \in \text{Adm}(\Gamma, \varepsilon)} \frac{\text{cost of } u}{\text{cost of an } \varepsilon \text{ piece of } u} = \frac{1}{\varepsilon} \inf_{u \in \text{Adm}(\Gamma, \varepsilon)} J(u, T).$$


Obstacle-avoidance problem

Let $\Gamma \subset M$ be a curve, $\text{Tube}(\Gamma, \varepsilon) = \bigcup_{q \in \Gamma} B(q, \varepsilon)$, and

$$\mathcal{A}(\Gamma, \varepsilon) = \left\{ u \in L^1([0, T], \mathbb{R}^m) \mid \begin{array}{l} T > 0, q_u(T) = y, \\ q_u(\cdot) \subset \text{Tube}(\Gamma, \varepsilon) \end{array} \right\}.$$

With this set we define the *tubular approximation complexity*

$$\Sigma_a(\Gamma, \varepsilon) = \frac{1}{\varepsilon} \inf_{u \in \mathcal{A}(\Gamma, \varepsilon)} J(u, T).$$

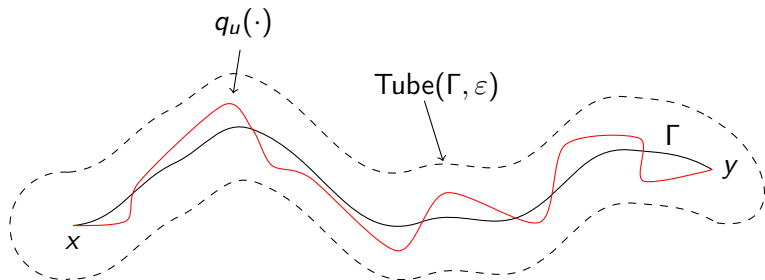


Rendez-vous problem

Let $\gamma : [0, T] \rightarrow M$ be a path and

$$\mathcal{N}(\gamma, \varepsilon) = \left\{ u \in L^1([0, T], \mathbb{R}^m) \mid \begin{array}{l} q_u(T) = y \text{ and } q_u(t) \in B(\gamma(t), \varepsilon) \\ \text{for any } t \in [0, T] \end{array} \right\}.$$

This set defines the *neighborhood approximation complexity*

$$\sigma_n(\gamma, \varepsilon) = \frac{1}{\varepsilon} \inf_{u \in \mathcal{N}(\gamma, \varepsilon)} J(u, T).$$

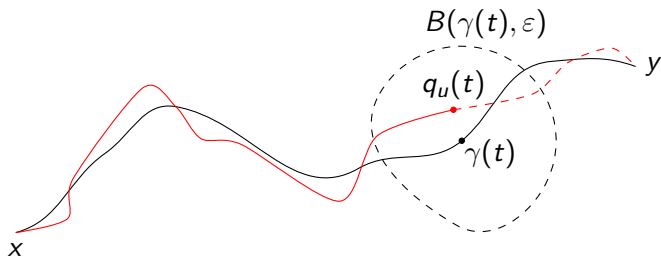

- 1 Motion planning problem
- 2 Definitions of complexity
- 3 Asymptotic estimates in affine-control systems

Particular case: nonholonomic control systems

Nonholonomic control system = control-affine system without drift

$$\dot{q}(t) = \sum_{i=1}^m u_i(t) f_i(q(t)),$$

that satisfies the Hörmander condition, i.e., such that

$$\text{Lie}_q\{f_1, \dots, f_m\} = T_q M, \quad \text{for any } q \in M.$$

- 1 The value function associated to this system w.r.t. the L^1 cost is a distance, called sub-Riemannian distance.
- 2 Due to the linearity of the system, we can always reparametrize trajectories without changing their L^1 cost. Hence,

Tubular approximation
complexity



Neighborhood approximation
complexity

- Introduced by Gromov (1996) in a different context.

- *Weak equivalence:*

$$\sigma(\Gamma, \varepsilon) \asymp g(\varepsilon) \iff C_1 \leq \frac{\sigma(\Gamma, \varepsilon)}{g(\varepsilon)} \leq C_2 \quad \text{for } \varepsilon \downarrow 0.$$

Complete results (Jean 2003).

- *Strong equivalence:*

$$\sigma(\Gamma, \varepsilon) \simeq g(\varepsilon) \iff \lim_{\varepsilon \downarrow 0} \frac{\sigma(\Gamma, \varepsilon)}{g(\varepsilon)} = 1.$$

Results in particular cases (Gauthier, Zakalyukin, et al., 2004-2013)

Recall the general form of a control-affine system

$$\dot{q}(t) = f_0(q(t)) + \sum_{i=1}^m u_i(t) f_i(q(t)).$$

We will consider:

- *strong Hörmander condition*: $\text{Lie}_q\{f_1, \dots, f_m\} = T_q M$ for any $q \in M$.
- The set of controls is

$$\mathcal{U} = \bigcup_{T \in (0, T]} L^1([0, T], \mathbb{R}^m).$$

- The cost J is the L^1 -norm of u .

Consequences:

- 1 Small time local controllability.
- 2 The associated driftless system ($f_0 = 0$) is a nonholonomic system.

Complexities for control-affine systems

- We will use the sub-Riemannian metric to define the complexities.
- Since the system is not linear, we cannot reparametrize the trajectories, and hence

Tubular approximation complexity \longleftrightarrow Neighborhood approximation complexity

For any $q \in M$, $s \in \mathbb{N}$, let

$$\Delta^s(q) = \text{span}\{[f_{i_1}, [f_{i_2}, [\dots, f_{i_k}] \dots]](q) \mid 1 \leq k \leq s, 1 \leq i_j \leq m\}.$$

$$\Delta^1(q) \subset \Delta^2(q) \subset \dots \subset \Delta^r(q) = T_q M$$

Hypothesis

Equiregularity: for any $s \in \mathbb{N}$, $\dim \Delta^s$ does not depend on the point $q \in M$.

Theorem

Let $f_0 \in \Delta^s \setminus \Delta^{s-1}$.

- Let $\Gamma \subset M$ be a smooth curve. Let k such that $T\Gamma \subset \Delta^k$ and $T\Gamma \not\subset \Delta^{k-1}$. Then, if \mathcal{T} is sufficiently small, we have

$$\Sigma_a(\Gamma, \varepsilon) \asymp \frac{1}{\varepsilon^k}$$

- Let $\gamma : [0, T] \rightarrow M$ be a path and k such that $\dot{\gamma} \in \Delta^k$ and $\dot{\gamma} \notin \Delta^{k-1}$. If, moreover, $s = k$, we assume that $\dot{\gamma} \neq f_0(\gamma) \bmod \Delta^{s-1}(\gamma)$. Then

$$\sigma_n(\gamma, \varepsilon) \asymp \frac{1}{\varepsilon^{\max\{s, k\}}}$$


- The complexity of **curves** is not sensible to the drift.
- The complexity of **paths** depends on the drift. In particular, when $f_0 \in \Delta^r \setminus \Delta^{r-1}$ where r is such that $\Delta^r = T_q M$, the complexity is always maximal, i.e., $\sigma_n(\gamma, \varepsilon) \asymp \varepsilon^{-r}$.

Techniques and Remarks


- Weak estimates of the value function near a point (generalization of the sub-Riemannian Ball-Box theorem).

Example

- f_1 and f_2 control vector fields on \mathbb{R}^3 satisfying the Hörmander condition,
- Drift s.t. $f_0 \notin \Delta^1 = \text{span}\{f_1, f_2\}$.



Nonholonomic system.



Control-affine system.


Techniques and Remarks (continued)

- Estimates obtained by reducing the control system with drift to a **driftless** but **time-dependent** system.

$$\dot{q} = f_0(q) + \sum_{i=1}^m u_i f_i(q) \quad \longrightarrow \quad \dot{q} = \sum_{i=1}^m u_i (e^{-tf_0})_* f_i(q).$$

- For this system we can define a generalization of the nilpotent approximation, that yields the estimates.

- We studied also two other notions of complexity, where we track the curve/path by interpolation, and no metric is assumed.

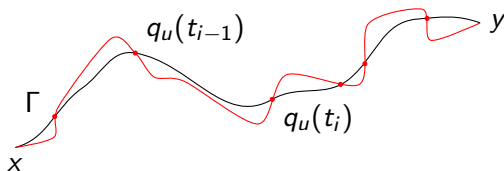

- We studied also another cost

$$\mathcal{I}(u, T) = \int_0^T \sqrt{1 + \sum_{i=1}^m u_i(t)^2} dt.$$

Thank you for your attention.

Let $\{\partial_{z_i}\}_{i=1}^n$ be the canonical basis of \mathbb{R}^n and $\mathcal{R}_{f_0}(q, \varepsilon)$ the reachable set from q with cost $\leq \varepsilon$. We define

$$\Xi(\eta) = \bigcup_{0 \leq \xi \leq \mathcal{T}} (\xi \partial_{z_\ell} + \text{Box}(\eta))$$

$$\Pi(\eta) = \bigcup_{0 \leq \xi \leq \mathcal{T}} \left\{ z \in \mathbb{R}^n : |z_\ell - \xi| \leq \eta^s, |z_i| \leq \eta^{w_i} + \eta \xi^{\frac{w_i}{s}} \text{ pour } w_i \leq s, i \neq \ell, \right. \\ \left. \text{et } |z_i| \leq \eta(\eta + \xi^{\frac{1}{s}})^{w_i-1} \text{ pour } w_i > s \right\},$$

Theorem

Let $z = (z_1, \dots, z_n)$ a privileged coordinate system at q for $\{f_1, \dots, f_m\}$, rectifying f_0 as the k -th coordinate vector field ∂_{z_ℓ} , for some $1 \leq \ell \leq n$. Then, there exist C, ε_0, T_0 s.t., if $\mathcal{T} < T_0$, it holds

$$\Xi\left(\frac{1}{C}\varepsilon\right) \subset \mathcal{R}_{f_0}(q, \varepsilon) \subset \Pi(C\varepsilon), \quad \text{for } \varepsilon < \varepsilon_0.$$