



HAL
open science

High power single-crystal fiber CW 946 nm laser and blue generation based on Rubidium-doped PPKTP (orale)

Loïc Deyra, Charlotte Liljestrand, Julien Didierjean, Carlota Canalias, Laurell Fredrik, François Balembois, Patrick Georges

► To cite this version:

Loïc Deyra, Charlotte Liljestrand, Julien Didierjean, Carlota Canalias, Laurell Fredrik, et al.. High power single-crystal fiber CW 946 nm laser and blue generation based on Rubidium-doped PPKTP (orale). Conference on Lasers and Electro-Optics Europe & International Quantum Electronics Conference (CLEO/Europe-IQEC), May 2013, Munich, Germany. hal-00818717

HAL Id: hal-00818717

<https://hal-iogs.archives-ouvertes.fr/hal-00818717>

Submitted on 30 Apr 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

High power single-crystal fiber CW 946 nm laser and blue generation based on Rubidium-doped PPKTP

*L.Deyra*¹, *C.Liljestrand*², *J.Didierjean*³, *C.Canalias*², *F.Laurell*², *F.Balembois*¹, *P.Georges*¹

1. Laboratoire Charles Fabry, Institut d'Optique, CNRS, Univ Paris-Sud, 91127 Palaiseau, France

2. Royal Institute of Technology, Roslagstullsbacken 21 10691 Stockholm, Sweden

3. Fibercryst SAS, La Doua Bâtiment l'Atrium, Boulevard Latarjet, F 69616 Villeurbanne Cedex, France

Blue lasers have numerous applications in spectroscopy, underwater communication and material processing. Direct emission in the blue region can be achieved with laser diodes, with powers up to the watt level [1]. Higher powers require efficient laser operating around 950 nm to be frequency doubled to the blue spectrum, which usually suffer from a lower gain than conventional 1 μ m lasers. Generally, intracavity frequency doubling set-ups and pulsed operation are used to increase the second harmonic generation efficiency, with output powers up to 4 W in cw[2] and 1.3W in pulsed regime [3]. In the past few years, both lasers materials and non linear crystals have progressed enough to allow the very simple extracavity frequency doubling of continuous wave lasers in periodically poled materials to acceptable powers[4].

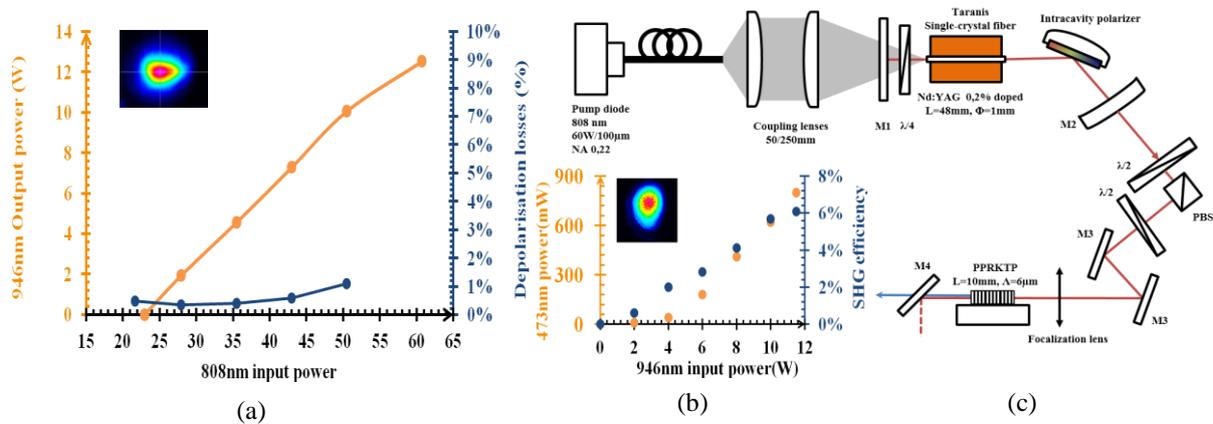


Fig. 1 (a) 946nm laser output power and depolarization losses; (b) 473nm power and SHG efficiency; (c) Experimental set-up: the laser cavity is formed by mirrors M1 and M2. M3 are transport mirrors, and M4 is a 946/473 dichroic mirror.

Single-crystal fiber has proved in the past years to be an alternative solution for high power lasers thanks to its excellent thermal management and better pump signal overlap. It has demonstrated up to 30 W of 946 nm with Nd:YAG high power oscillators [5]. We investigate here the potential of Nd:YAG single-crystal fiber oscillator for high power, continuous wave and polarized laser at 946 nm (fig1.c). We demonstrate a polarized laser emitting 11.5 W at 946 nm (fig1.a) with good beam quality ($M^2 < 1.7$) and very good stability over 2 hours.

We then show that efficient extracavity conversion is possible in a 10mm long, periodically poled ($\Lambda = 6.03 \mu\text{m}$), flux grown, rubidium-doped KTP (PPRKTP) with up to 800mW (fig1.b) of measured output at 473nm ($M^2 < 1.8$), whereas regular SHG crystals (LBO and BiBO) delivers less than 30mW. However, in the blue there is substantial absorption in KTP which leads to temporal instabilities at highest power levels, but stable output could be reached at more than 250mW of blue power.

To the best of our knowledge, this is the first time that a polarized output of more than 10 W at 946 nm has been reported. It is also the highest power ever obtained by extracavity frequency doubling a cw 946 nm laser into the blue region.

References

- [1] A. Michiue, T. Miyoshi, T. Kozaki, T. Yanamoto, S. Nagahama, and T. Mukai, "High-Power Pure Blue InGaN Laser Diodes", presented at IEICE Transactions, 2009, pp.194-197
- [2] Y. Chen, H. Peng, W. Hou, Q. Peng, A. Geng, L. Guo, D. Cui, and Z. Xu, "3.8 W of cw blue light generated by intracavity frequency doubling of a 946-nm Nd:YAG laser with LBO," *Applied Physics B*, vol. 83, no. 2, pp. 241–243, Mar. 2006.
- [3] F. Chen, X. Yu, R. Yan, X. Li, C. Wang, J. Yu, and Z. Zhang, "High-repetition-rate, high-peak-power, linear-polarized 473 nm Nd: YAG / BiBO blue laser by extracavity frequency doubling," *Optics Letters*, vol. 35, no. 16, pp. 2714–2716, 2010.
- [4] G. K. Samanta, S. C. Kumar, M. Mathew, C. Canalias, V. Pasiskevicius, and F. Laurell, "High-power, continuous-wave, second harmonic generation at 532 nm in periodically poled KTiOPO₄," *Optic letters*, vol. 33, no. 24, pp. 2955–2957, 2008.
- [5] X. Délen, I. Martial, J. Didierjean, N. Aubry, D. Sangla, F. Balembois, and P. Georges, "34 W continuous wave Nd:YAG single crystal fiber laser emitting at 946 nm," *Applied Physics B*, vol. 104, no. 1, pp. 1–4, Jul. 2011.