

Modelling crisis management for improved action and preparedness (CRISMA): Modelling submersion on the Charente-Maritime coast

Mehdi Pierre Daou, Agnès Cabal, Christophe Coulet, Olivier Bertrand, Eric Blayo, Antoine Rousseau, Arnaud Degroof

▶ To cite this version:

Mehdi Pierre Daou, Agnès Cabal, Christophe Coulet, Olivier Bertrand, Eric Blayo, et al.. Modelling crisis management for improved action and preparedness (CRISMA): Modelling submersion on the Charente-Maritime coast. Colloque international " Connaissance et compréhension des risques côtiers : Aléas, Enjeux, Représentations, Gestion ", Jul 2014, Brest, France. hal-01100923

HAL Id: hal-01100923 https://inria.hal.science/hal-01100923

Submitted on 7 Jan 2015 $\,$

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Modelling crisis management for improved action and preparedness


Modelling submersion on the Charente-Maritime coast

Mehdi Pierre DAOU · Agnès CABAL · Christophe COULET · Olivier BERTRAND · Eric BLAYO · Antoine ROUSSEAU · Arnaud DEGROOF

Abstract: CRISMA is a Research and Development project financed by the European Community. Its objective is to develop a simulation-based decision support system, in different domains of the natural or industrial risk (flood, snowstorm, seism, forest fires, accidental pollution, urban accidents). The application in France, coordinated by ARTELIA Eau & Environnement, is devoted to the submersion risk on the Charente-Maritime coast and based on the experience feedback of the storm Xynthia in February, 2010.

In this framework, a specific work is in progress through a thesis realized in collaboration between ARTELIA and INRIA. Its objective is to elaborate a methodology of multi-model coupling which should be effective and applicable for the CRISMA project. These models may differ in several ways, related either to the physics and/or to the numeric concepts. The developed methodology may allow to taking into account more specific areas (urban zone, bridge in charge, ...), but also should be able to simplify the simulation by dimension changes of model parts (for example, a 1D model for rivers, and a 2D one for sea). The present work addresses more specifically the problem of coupling models with different spatial dimensions.

Implementation of a user defined dike behaviour with the help of Damage Probability matrix

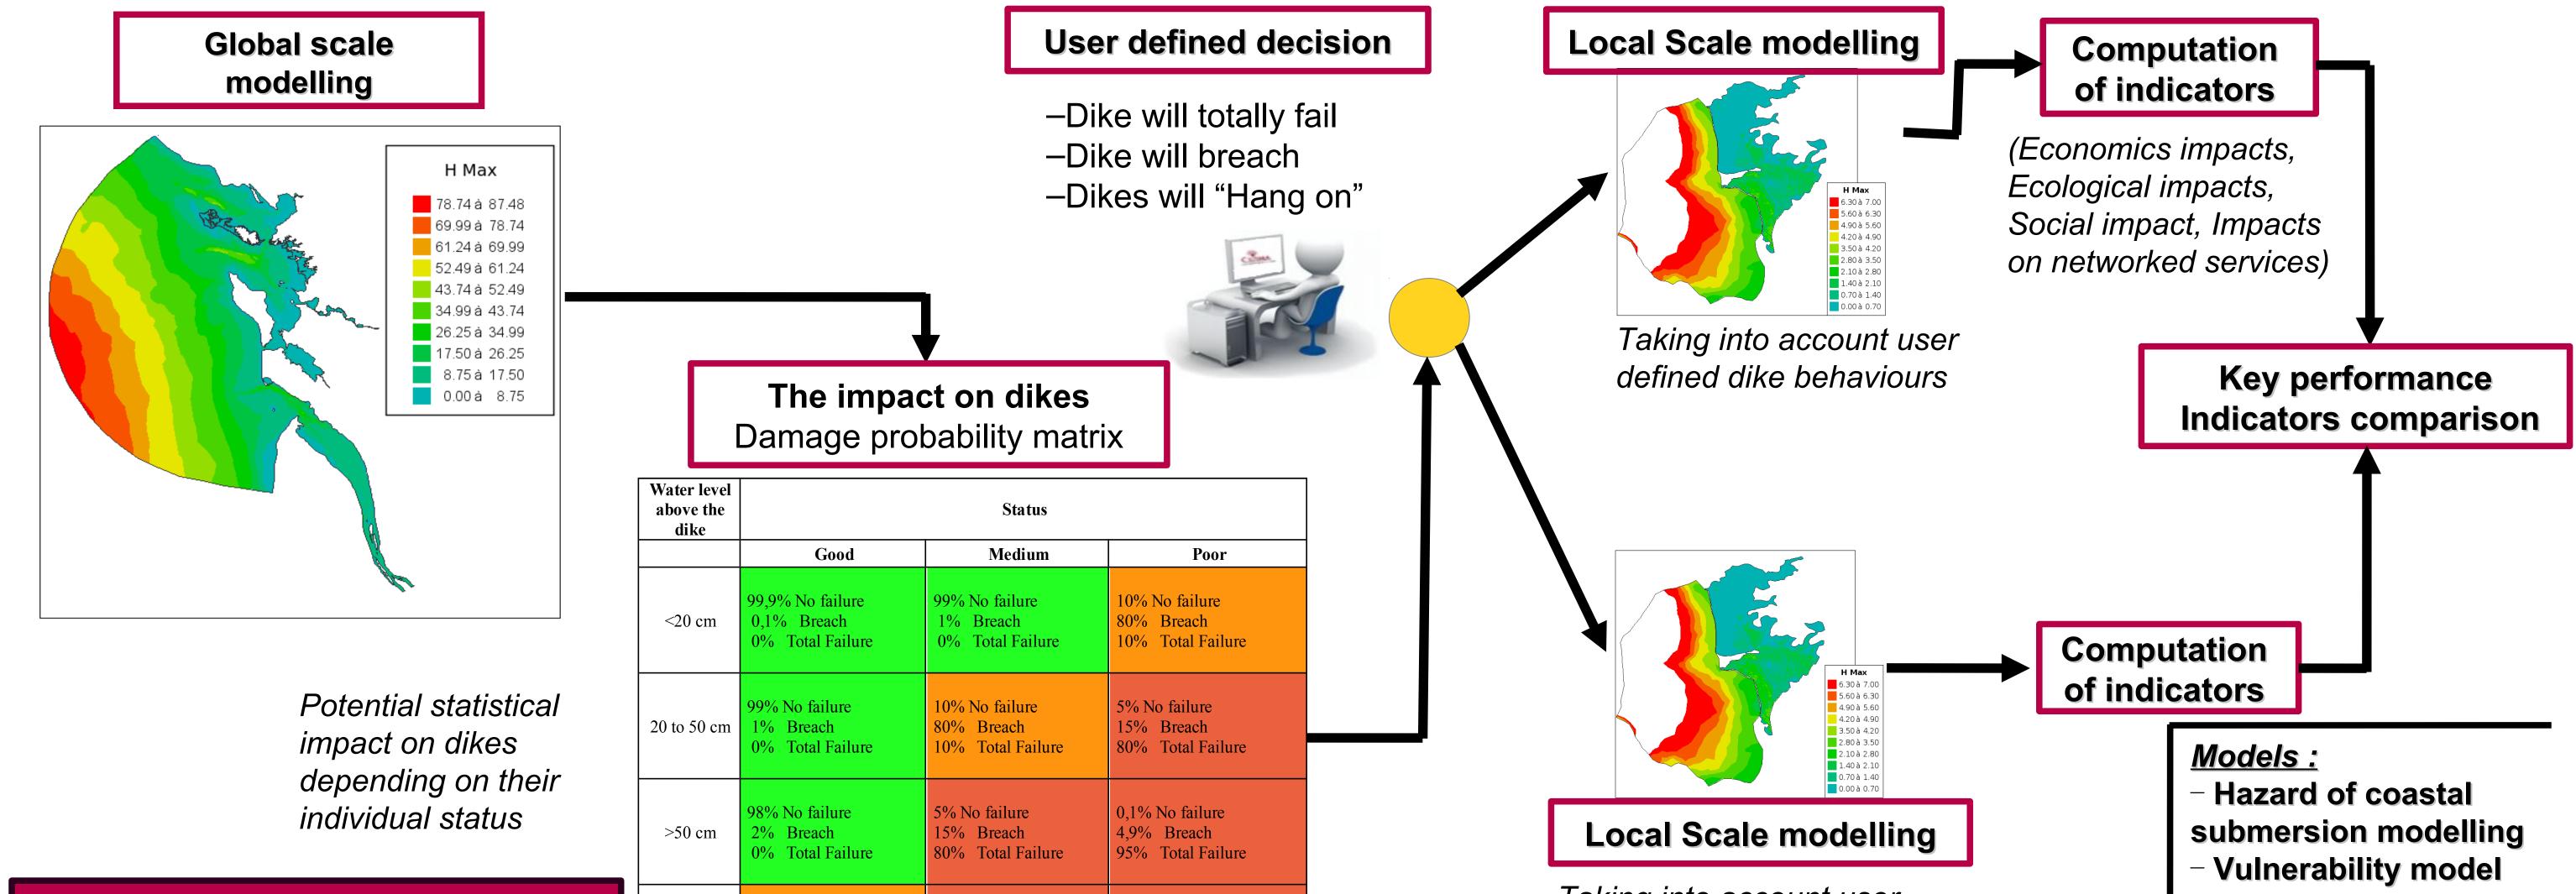

Coupling method

10% No failure	0,1% No failure	0,0% No failure
80% Breach	4,9% Breach	0,1% Breach
10% Total Failure	95% Total Failure	99,9% Total Failure

Taking into account user defined dike behaviours

-Computation of indicators

Models :

- The Coupling methode :
 - Navier Stokes 3D equations (Telemac3d module)
 - Shallow watter 1D equations (Mascare module)
- Managed communication : Open-Palm
- Coupling Method : Schwarz
 - \rightarrow iterative method, few intrusive


<u>Conditions :</u>


- No bottom friction Ks $\rightarrow +\infty$ and v = 10⁻⁶ m² .s⁻¹
- Initial Condition :
 - U = 0 m.s⁻¹ and constant height Z_s=0.114 m

Boundary conditions :

$$\begin{vmatrix} U \cdot \vec{n} = 0 & \text{no flow through solid boundaries (bottom and lateral)} \\ U = U_d(Q_d) & \text{at the input} \\ Z_s = Z_{sd} & \text{at the output} \\ \frac{\partial Z_s}{\partial t} + U_h \cdot \nabla_h Z_s - w = 0 & \text{at the free surface } z = Z_s(x, y, t) \\ Q_d = 0.01372 [1 - 0.2\cos(0.01 \pi t)] & Z_{sd} = 0.114 \text{m} \\ \hline \mathbf{Physical interface conditions :} \end{aligned}$$

 $Q_{1D}(L,t) = Q_{3D}(L,t)$ and $Z_{sID}(L,t) = \overline{Z_{s3D}}(L,t)$

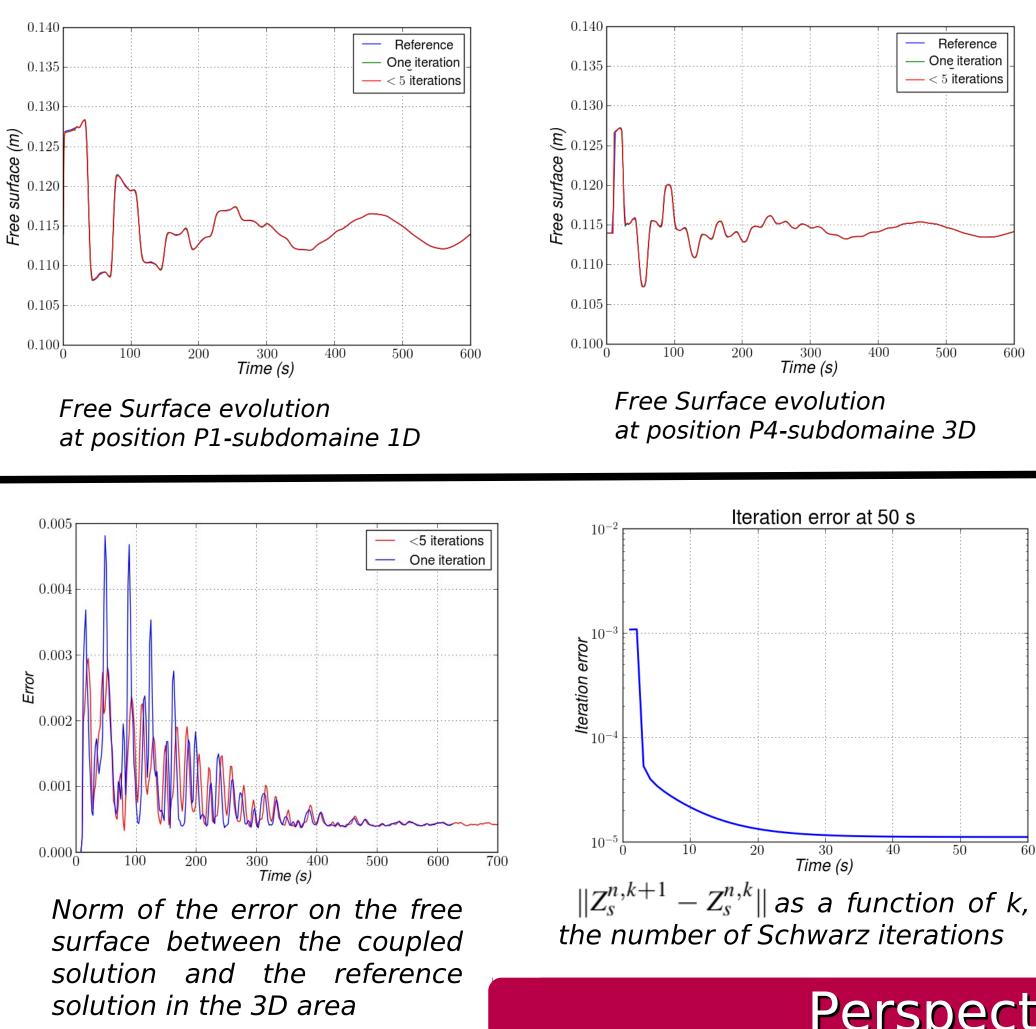

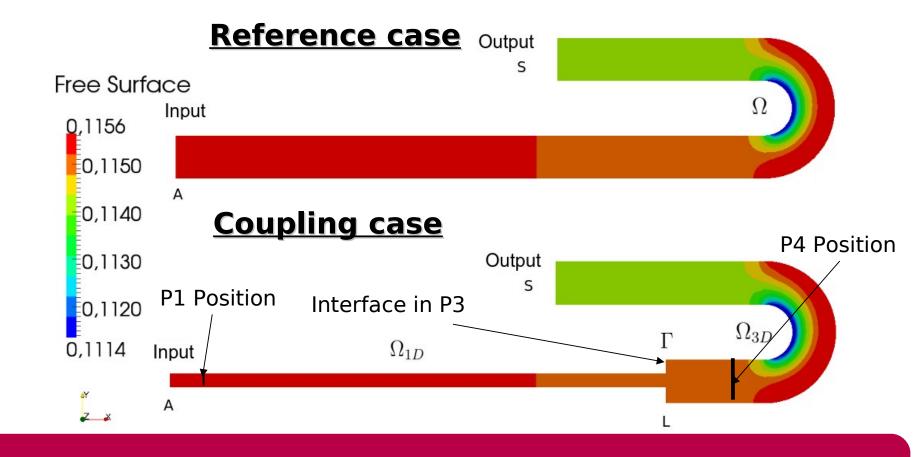

Conclusion

- The coupling method is valid :
 - If the flow must be almost one-dimensional in the 1D domain
 - If the interface 1-D/3-D must be located in this area.
- The simple coupling algorithm gives almost the same results than the reference full 3-D simulation in our simplified case.
- For complex cases, it's possible to use Schwarz based coupling algorithm to improve accuracy

Perspective

CRISMA Consortium

The CRISMA project (www.crismaproject.eu) is co-ordinated by VTT Technical Research Centre of Finland. The consortium counts 17 partners from 9 countries, representing end-users, research and industry. The project ends in August 2015.

>1 m

Contact

Mehdi Pierre Daou, PhD candidate Artelia Eau et Environement/ Moise Team (INRIA) Tel: +33 4 76 33 42 54, Email: mehdi-pierre.daou@arteliagroup.com

- Definition of a test-case more complex (La Rochelle)
 - Validation this iterative algorithm
 - Using more complex interface conditions, in order to ensure a fast convergence

www.crismaproject.eu



- This project has received funding from the European Union's Seventh Framework
- Programme for research, technological development and demonstration under
- grant agreement no 284552.

